LIBRARY
HIO NORTHERN UNIVERSITY

REGULATIONS

Not more than two books can be taken out at any one time and cannot be retained longer than two weeks.

At the expiration of two weeks books may be re-let if returned to the librarian in good condition.

A rental of two cents a day will be charged on each book held over two weeks.

ass No. 62138 Accession No. 237

se _____ Section _____

THE ELEMENTS

OF

ELECTRIC LIGHTING,

INCLUDING

ELECTRIC GENERATION, MEASUREMENT, STORAGE, AND DISTRIBUTION.

BY

PHILIP ATKINSON, A.M., PH.D.,

AUTHOR OF "ELEMENTS OF STATIC ELECTRICITY,"
AND "THE ELEMENTS OF DYNAMIC ELECTRICITY AND MAGNETISM."

OHIO NORTHERN UNIVERSITY
LIBRARY
ADA, OHIO

EIGHTH EDITION, FULLY REVISED, AND NEW MATTER ADDED.

NEW YORK:
D. VAN NOSTRAND COMPANY,
23 MURRAY AND 27 WARREN STREET.
1893.

COPYRIGHT, 1888,
BY PHILIP ATKINSON.

All rights reserved.

ROBERT DRUMMOND, ELECTROTYPER AND PRINTER, NEW YORK.

621.32
A87

INTRODUCTION.

THE object of this volume is to meet the demand for a complete, comprehensive treatise, setting forth the various facts pertaining to electric lighting in plain language, devoid of technicality and perplexing mathematical formulæ, from which business men, mechanics, and those who have the care and management of dynamos and lamps, as well as general readers, may gain a knowledge of the principles and construction of the apparatus by which this light is produced, and of the nature of that invisible, intangible agency which is its prime cause. It is also designed as a convenient handbook for the electrical engineer, from which he may refresh his memory in regard to the apparatus described and its use, or gain a hint as to the nature of electricity as developed in its practical application.

As the storage battery has become an important auxiliary in electric lighting, a full description of its construction, principles, and application has been given, and also of the inductive, alternating current system, which has recently been so largely developed.

Among other sources of information, the writer has

237

freely consulted the excellent works of Thompson, Schellen, Maier, Gordon, Niaudet, and Gladstone and Tribe, and has availed himself of the advantage of various cuts used by them, illustrating principles and apparatus. He also takes great pleasure in acknowledging his obligations to the various electric light companies whose apparatus is described, for highly valuable practical information and the free use of numerous cuts; also to the various electric journals for similar information, especially to the "Electrical Engineer," "Electrical World," and "Western Electrician."

PHILIP ATKINSON.

CHICAGO, Aug. 16, 1888.

INTRODUCTORY NOTE TO THE SEVENTH EDITION.

THE favor with which this book has been received has encouraged the author to make a thorough revision preparatory to the publication of the present edition. Various inaccuracies and errors have been eliminated; Chapter II, on the "Principles of the Dynamo," has been rewritten; in Chapter VI, on "Electric Measurement," improved voltmeters and ammeters of recent, American construction have been described instead of some of the older European instruments, also the Thomson Recording watt-meter; and resistance coils instead of Ayrton & Perry's ohm-meter; and a new American storage battery has been added to the European storage batteries described in Chapter IX.

It is hoped that this revision, which has been made at considerable cost, will add materially to the interest and value of the book, giving a clearer and more accurate knowledge of the principles of electric lighting, and be appreciated by its readers.

PHILIP ATKINSON.

CHICAGO, September 1, 1891.

CONTENTS.

CHAPTER I.

PAGE

ELECTRICITY A MODE OF MOLECULAR MOTION . . . 1

CHAPTER II.

PRINCIPLES OF THE DYNAMO 14

The Dynamo. — The Armature. — The Commutator. — Closed Circuit and Open Circuit Armatures. — The Brushes. — The Field Magnets. — The Dynamo's Mode of Action. — Difference of Potential. — Reversed Currents. — Commutation. — The Armature's Mode of Action. — Series, Shunt, and Compound Winding. — Constant Current Dynamo. — Constant Potential Dynamo. — Separate Excitation.

CHAPTER III.

ALTERNATING CURRENT DYNAMOS 40

Principles of the Alternating Current Dynamo. — The Siemens-Halske Dynamo. — The Lontin Dynamo. — The Gordon Dynamo. — The Westinghouse Dynamo. — The Converter.

CHAPTER IV.

DIRECT CURRENT DYNAMOS 61

The Edison Dynamo. — The Weston Dynamo. — The Sperry Dynamo. — The Brush Dynamo. — The Thomson-Houston Dynamo. — The Western Electric Dynamo. — The Ball Dynamo. — The Mather Dynamo. — The Van Depoele Dynamo. — The Hochhausen Dynamo. — The Wood Dynamo.

CHAPTER V.

ELECTRIC TERMS AND UNITS 115

Electric Potential. — Electro-motive Force. — Resistance. — Current. — Electric Induction. — Magnetic Induction. — Conductivity and Insulation. — Quantity and Intensity. — Electric Units. — The Volt. — The Ohm. — The Ampere. — The Ampere-Hour. — The Coulomb. — The Farad. — The Microfarad. — The Watt. — The Electric Horse-Power. — The Joule.

CHAPTER VI.

PAGE

ELECTRIC MEASUREMENT 133

The Potential Indicator. — Voltmeters and Ammeters. — The Weston Voltmeter. — The Weston Ammeter. — The Weston Milliammeter. — The Wirt Voltmeter. — Ayrton & Perry's Spring Voltmeters and Ammeters.—Gravity Ammeters.—The Cardew Voltmeter.—The Edison Current Meter.—The Forbes Coulomb Meter.—The Thomson Recording Watt-Meter.—Measurement of Electric Resistance.—Resistance Coils.—The Standard Light-Unit.—The Bunsen Photometer.

CHAPTER VII.

THE ARC LAMP 158

Principles of the Arc Lamp. — Arc-Light Carbons. — The Jablochkoff Electric Candle. — The Jamin Electric Candle. — The Sun Lamp. — Automatic Adjustment of Arc-Light Carbons. — The Foucault-Duboscq Lamp. — The Serrin-Lontin Lamp. — The Brush Arc-Light Lamp.

CHAPTER VIII.

THE INCANDESCENT LAMP 186

Reynier's Lamp. — Early Experiments. — Incandescent-Light Carbons. — The Edison Carbons. — The Lane-Fox Carbons. — The Cruto Carbons. — The Swan Carbons. — The Weston Carbons. — The Bernstein Carbons. — General Details of Filament Construction. — Construction of the Incandescent Lamp. — Position of Lamp. — Renewal of Lamps.

CHAPTER IX.

THE STORAGE BATTERY 209

Electric Storage. — Planté's Secondary Cell. — Chemical Reaction in the Planté Cell. — The Planté Battery. — Faure's Secondary Cell. — Chemical Reaction in the Faure Cell. — Faults of the Faure Cell. — The Improved Faure Secondary Cell. — Electric Formation of the Plates. — Electro-Motive Force, Resistance and Current of Cell. — Cause of Buckling. — Variable Resistance of Electrolyte. — The Pumpelly Cell. — The Julien Accumulator. — Durability of Storage Cells. — Definitions.

CHAPTER X.

ELECTRIC DISTRIBUTION 229

Arc-Light Distribution. — Series Installation. — Hefner von Alteneck's Regulator. — Incandescent-Light Distribution. — The Direct Current System. — Parallel Installation. — Multiple Series Installation. — Series Multiple Installation. — Combined Arc and Incandescent Installation. — The Edison Three-Wire System. — The Storage Battery System. — The Induced Alternating Current System. — The Primary Alternating Current System. — Meters. — Fuses. — Switch-Boards. — Lighting Mines. — Installation Rules.

THE ELEMENTS
OF
ELECTRIC LIGHTING.

CHAPTER I.

Electricity a Mode of Molecular Motion.

Introductory Note. — To understand clearly what electricity is capable of doing, it is important to ascertain, if possible, what it is; and while it can not perhaps be shown with absolute certainty that the long-sought solution of this problem has been found, yet the proofs from numerous sources converge chiefly in the direction indicated in this chapter; and in all the various phenomena pertaining to electric lighting, the theory here set forth is found to be closely in accordance with the facts; hence it has been deemed important to make it the introduction to the phenomena to be described hereafter.

The elementary components of the natural universe are matter and energy. Matter in the abstract is inert, it can move or act only as actuated by energy, and energy in the abstract is incapable of movement or action except through the medium of matter. But we

have no actual knowledge of either in the abstract, nor can we separate them, and all our conceptions of them in this respect are theoretical. All matter, even when apparently inert, is under the influence of energy, both in respect to its mass and its molecules. The apparent inertness of the mass is only relative. A steel rail, resting in its place on the track, is relatively inert with respect to its immediate surroundings, but as a part of the earth it partakes of the earth's motion as a mass; and close observation and measurement show that its dimensions are subject to continual variation with continual change of temperature — the result of expansion and contraction, — which proves that its molecules are in continual motion. The same is true of the column of mercury or alcohol in the thermometer, in which change of dimension is more apparent.

All matter is subject to change of dimension with change of temperature, but not all in the same degree. In many kinds, as baked wood, bone and ivory, it is almost imperceptible, requiring delicate instruments to detect it; while in others, as gas, vapor, and mercury, it is more prominent; so that if change of dimension be accepted as proof of molecular motion, it must be admitted that such motion is a constant, natural condition of all matter, since an absolutely stationary temperature may be regarded as a practical impossibility. Hence, the absolute immobility of matter, either in its mass or its molecules, must be regarded as a purely mental conception, having no existence as an actual fact.

But even if the maintenance of an absolutely stationary temperature could be demonstrated as a possibility, such demonstration would not disprove the continuous molecular motion of matter, since it has been fully

demonstrated that heat itself is a mode of motion; so that to admit the constancy of heat in matter is to admit the constancy of molecular motion.

It is not important to adduce the proofs on which this theory rests. It is sufficient to state that it is maintained by the highest scientific authority, and accepted as a fundamental doctrine of modern science.

Common observation shows that nothing is so hot that it can not become hotter, or so cold that it can not become colder, heat and cold being merely convenient relative terms to express different degrees of temperature. Steam generated under a pressure of several atmospheres is much hotter than when generated under a pressure of one atmosphere. Cold iron is relatively warm as compared with colder iron. Even ice itself possesses a certain degree of heat.

The theory of sound, as an undulatory movement of the air, is too well established to require the presentation of proof; and the theory of light, as another form of undulatory movement, has also been accepted as a well-established doctrine. But in regard to the nature of electricity scientific opinion has been greatly divided, and no theory yet proposed has been so free from objection as to be generally accepted. But electric development during the last ten years has done much toward the settlement of this question; and the theories and opinions of the great electricians of the period immediately previous are yielding to the steady pressure of recent investigation, just as their investigations modified or displaced former theories and opinions.

Observation shows that electricity may be developed in every kind of matter; from which we may reasonably infer that it is a universal property of matter in the

same sense as heat. In proof of this, we find that it may be promptly developed in the numerous class of bodies known as non-conductors by means of friction, and in the class known as conductors, which embraces all other bodies, by the same means, if they are first properly insulated. As an example of the latter class, we may select a brass rod; let it be insulated and subjected to friction from another insulated body, and electricity is rapidly developed, as shown by attraction, and by the spark and snap. That this electricity is developed in the rod itself, and not derived from the body by which the friction is produced, is proved by using a metal friction-brush, or metal in any form by which a light contact is obtained. The Varley and Töpler electric machines are examples of this. In the Armstrong hydro-electric machine we have a very notable instance of electricity generated by the friction of condensed steam, emitted through metal pipes tipped with wood. From these, and numerous other instances which might be adduced, we may conclude that electricity can be developed in all bodies by friction; its development in conductors, when insulated, being equally as practicable as in non-conductors.

The generation of heat by friction is coincident with that of electricity, and the heat continues to increase long after the electric development has attained its maximum. If the friction be sufficiently increased in the case of a solid body, as a metal, light is developed, the metal becoming incandescent. Thus, by the agency of friction, certain phenomena are produced, the first of which we call electricity, the second heat, and the third light. The last two we designate as modes of motion. Why not the first also? The friction is a result of

mechanical energy acting through matter; the energy in this form disappears, and is reproduced as electricity, heat, and light. Each of these then is a different manifestation of energy acting through matter as its medium.

Since these manifestations are different, it is evident that each must have its own peculiar form of molecular motion; that the electric movement, which becomes prominent first, is the most easily and rapidly developed, and essentially different from the heat movement, which, though coincident with it, is developed more slowly; while light is not produced till the movement has assumed great intensity, the light changing from red to white as the intensity increases.

In the battery we have electricity produced by chemical reaction, and heat also as a coincident result. The chemical reaction is itself a mode of atomic and molecular motion by which atoms and molecules interchange and form new combinations; and since the incidental heat is admitted to be a mode of motion, we may reasonably infer that the more prominent electricity is another mode of motion; the energy disappearing in the chemical mode, reappearing in the heat and electric modes — molecular motion in one form being transmuted into molecular motion in the other two forms.

In the dynamo we have electricity generated by mechanical action combined with magnetic, electricity and magnetism reciprocally producing each other. Magnetism is admitted to be the result of a certain molecular arrangement in the substance of the magnet; and in the soft iron of the electro-magnets of the dynamo this molecular arrangement undergoes constant disturbance, producing a series of momentary electric

currents with such rapidity as to maintain an apparently constant electric action. Hence we must infer that these magnets are in a constant state of intense molecular motion; and since magnetism and electricity are always coexistent and reciprocal, we are warranted in the conclusion that they are of the same nature, — *sui generis*, — and that if one is a mode of molecular motion the other must be. And this theory gains additional strength from the fact that here again we find heat generated as an incidental result, to such an extent that special arrangements are required to keep the dynamo from being injured by overheating.

In the thermopile we have electricity generated by the direct agency of heat; and in order to create a difference of electric potential, which is the principle upon which every electric generator is based, a difference of heat potential must be created. This is accomplished by the use of two metals, usually bismuth and antimony, having different conductivities for heat and electricity. Bars of each are smelted together at the ends, and arranged in compact form in an alternating series, in such a manner that one set of junctions can be heated while the alternate opposite set is cooled. The electric current flows across each heated junction from bismuth to antimony, and across each cooled junction from antimony to bismuth, so that at each junction it receives a fresh impulse in the same general direction, since the heated and cooled junctions alternate. The specific capacity of bismuth for heat is 0.030, and that of antimony, 0.051, that of water being unity; and the temperature of each, when heated or cooled from the same source, varies inversely as this specific capacity; hence, at the heated junctions

the temperature of the bismuth rises above that of the antimony, and at the cooled junctions falls below it; and as the heat movement as well as the electric movement is from higher to lower potential, we find here an exact correspondence in the movement of each.

But there is also a difference in the molecular constitution of the two metals, as indicated by their crystalline structure, bismuth crystallizing in one form while antimony crystallizes in another; and the greater the difference in this respect, as well as in conductivity for heat and electricity, between these or any other two metals, the more energetic the thermoelectric action. Indeed this difference in crystalline structure, and hence in molecular constitution, is undoubtedly the cause of the difference in conductivity; the difference in electric and heat potentials corresponding, as shown, to the difference in electric and heat conductivities.

But we have also in this instrument an instance of the reciprocal action between heat and electricity. If instead of heating and cooling alternate junctions to generate electricity, an electric current is passed through from an external source, the junctions become heated or cooled according to the direction of the current. A current passed through a bismuth-antimony pair from antimony to bismuth heats the junction, while if passed through from bismuth to antimony the junction is cooled. According to the doctrine that heat is a mode of motion, the heating is an increase in the intensity of motion, and the cooling a decrease of that intensity; and in this experiment the reduction of temperature has been carried to such an extent that water has been frozen in cavities made in the metals. It will also be perceived that the same correspondence of movement between

heat and electricity exists in the reciprocal action by which heat is generated, as in the direct action by which electricity is generated.

The generation of electricity by light, or, as Dr. Werner Siemens terms it, "the direct conversion of the energy of light into electric energy," has received the attention of leading electricians, and led to the invention of instruments for that purpose; and, although the invention is still confined to the laboratory, enough is known to demonstrate the possibility of such conversion, and hence to establish the fact of such an intimate relation between these two different manifestations of energy as to indicate the probability of a similar nature. The means employed is, in some respects, not unlike that already described for the generation of electricity by heat, — a combination of metals differing in molecular construction and conductivity. But in this case metal plates are used; and selenium seems to have the preference, combined with gold and some base metal.

The accepted doctrine of light as a mode of motion is too well known to require elucidation here; but the nature of the instrument above referred to, and the requirement of metals for its construction differing in molecular constitution, indicate that the mode of motion known as light is changed by contact with the metals into the mode of motion known as electricity, either by this contact generating the resulting mode of motion in the metals themselves, or in some medium permeating their structure.

The action then in all these modes of generation is both direct and reciprocal. Heat produces electricity, and electricity produces heat; magnetism produces electricity, and electricity magnetism; light produces elec-

tricity, and electricity light. There is also reciprocal action between mechanical motion and electricity; but the connection is not so close and intimate as between the different forms of molecular motion, in which proof in regard to the nature of one becomes proof in regard to the nature of the other.

Thus far we have confined our attention to electric generation, but electric transmission is of equal importance in elucidating our subject; for if we could satisfactorily determine how electricity is transmitted, we should be in a fair way to determine what it is.

Assuming the truth of our original proposition, that energy is inseparable from matter, and that electricity is one of the forms in which energy manifests itself, a medium, consisting of matter in some form, is essential to its transmission. On this point there are two theories; one, that energy uses the different forms of tangible matter as its medium; the other, that all tangible matter — solid, liquid, and gaseous — is permeated by a certain intangible fluid known as ether, which constitutes the medium for electric transmission. The former theory assumes that electric transmission is by vibrations of the tangible matter itself; the latter, that it is by vibrations of the intangible ether. As both theories assume a mode of motion, and are in this respect equally well adapted to our purpose, it is unnecessary to enter into the discussion of their respective merits, further than to say, that the existence of ether has never been demonstrated, that the ether theory is unsupported except by inferential proof, and that the transmission of electric energy by the vibratory motion of tangible matter is the more reasonable theory of the two, and far more susceptible of demonstration.

The theory of the universal ether was originally invented to meet the necessity of a medium for the transmission of light through the interplanetary spaces, where it has been supposed that air can not exist, and its adaptation to electricity is of more recent origin. But the theory of the existence of a universal atmosphere, like that of the earth, has strong support, though, in the interplanetary spaces, it must be almost as impalpable as the supposed ether itself.

The two important factors in electric transmission are conductivity and resistance; one of which is always in the inverse ratio of the other, and the relative proportions of each in every substance constitute the difference between the conductor and the non-conductor. We may assume that electric transmission depends on molecular structure, that in good conductors this structure is such as to facilitate transmission, and in inferior conductors to retard it, while the structure of non-conductors is such as almost wholly to prevent it; and we may suppose, that in a good conductor the molecules lie in parallel lines, and that the electric energy causes each molecule to impinge on the next contiguous one, producing an undulation which runs through the conductor for perhaps a thousand miles in an instant; but that in the inferior conductor, or the non-conductor, the molecular arrangement is more or less irregular, requiring a wrenching or twisting of the molecules to bring them into position. It is evident, that in the latter case far greater energy is required to produce the same result, and that this series of wrenchings and twistings must result in the coincident development of that other mode of motion which we term heat. So that while in a good conductor, as a copper

wire, electric transmission is easily effected, and the development of heat very slight, in an inferior conductor, as a platinum wire or a carbon filament, the heat development rises to incandescence. These results indicate that the transmission of electric energy is by molecular motion, as assumed, or rather that this mode of motion by which this energy manifests itself is that which we term electricity.

According to the old theory of thunder and lightning, the passage of electric fluid through the air produces the flash, and the thunder is a result of the air displacement and collapse. This theory is evidently incompatible with the theory of electric energy using the air as its medium. According to the latter view, there is no passage of electric matter through the air, and consequently no displacement except that resulting from the incidental development of heat. The electric discharge takes place along a narrow line, often three to five miles or more in length. The air along this line becomes incandescent, and is expanded by the intense heat; but the partial vacuum thus created is confined to this narrow line, and the collapse is quite insufficient to account for the terrific peal of thunder which often accompanies the flash. But the intense vibration occurring throughout this long line in an infinitesimal moment of time must produce the thunder-peal in strict accordance with the well-known laws of sound. It is possible that the succession of vibrations following the discharge, and set in motion by it, produces the rumble often heard, but the one tremendous vibration is the first immediate result of the discharge.

Comparing the results of thunder and lightning with those of explosions of gunpowder and dynamite, we

find a very essential difference. In the explosion there is a displacement of a great volume of air, not confined to a single line, but diffused over a large space; and the results of the sudden expansion and collapse are often the breaking of glass and the destruction of buildings in the immediate vicinity, the effect of the air movement being often felt at a distance too great for the sound to be audible. But the electric discharge takes place over our dwellings, or between earth and cloud in our immediate vicinity, accompanied by the terrific thunder-peal, often far exceeding the sound of the loudest explosion, and the only perceptible effect is a slight tremor such as should follow from the vibratory movement assumed in our hypothesis. Hence we conclude that the transmission of electric energy in this case is by a vibratory motion; or, as before, that this mode of motion, so produced, is electricity.

All electric action is an exhibition of energy, whether it be in the movement of a pith ball, in the flash of the electric spark, in the brilliancy of the arc light or the softer radiance of the incandescent, in the deposition of metal by electrolysis, the click of the telegraph, the speech-producing movement in the telephone, the propelling of cars on a railway, or in the lightning's flash rending the oak. It produces chemical decomposition, mechanical motion, light and heat. It inflicts pain, destroys life, soothes suffering, heals disease. All these varied phenomena are different manifestations of energy.

Since electricity, then, is a product of energy and a producer of energy, it is manifestly closely allied to energy. But high electric authority says, "Whatever electricity is, it is not energy." This is true if we speak of energy in the abstract. But in this sense neither is

heat energy, nor light, gravity, or mechanical motion. Energy in the abstract is a mere mental conception having no actual existence; it must act through matter as its medium, and in this concrete sense there can be no more objection to regarding electricity as one of the forms in which energy manifests itself than in regarding heat, light, or sound in that sense; and since every manifestation of energy is by means of motion, the conclusion seems inevitable that *electricity is a mode of molecular motion.*

CHAPTER II.

Principles of the Dynamo.

The requisites for the production of the electric light are an electric generator, an electric lamp, and a conductor connecting the generator and lamp.

The generator must be capable of producing continuous, steady electric action of sufficient energy for the required work. It may be either an ordinary battery or a dynamo.

From the beginning of the present century until about 1867 the battery was the only known generator capable of producing the electric light; the electric machine, though capable of powerful effects, being incapable of producing a continuous electric current. All batteries are not equally well adapted to this purpose: the Daniell, Leclanché, and many others, which are adapted to various other kinds of electric work, are not suitable for the production of the electric light. The Bunsen battery can be used; and if a light of short duration only is required, as in surgical examinations or theatrical effects, any good carbon-zinc battery will answer the purpose. But for a strong light of several hours' duration, the Grove battery is superior to all others, 40 to 50 Grove cells being capable of producing such a light for two or three hours. From these facts it is easy to see why electric lighting, though known as early as 1800, was merely a laboratory experiment until

about 1867; the great expense and labor of renewing the fluid in 40 or 50 Grove cells once in two or three hours being alone sufficient to render the ordinary use of the light obtained in this way impracticable, while the noxious fumes from such a battery make its use for this purpose practically prohibitory.

THE DYNAMO. — In 1867 the previous inventions of several leading electricians culminated in the production of the dynamo; and the problem of general electric lighting on an economical basis received a practical solution, since electricity could now be generated by mechanical power at far less cost and in far greater

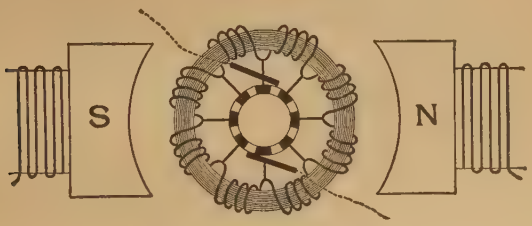

Fig. 1.

quantity than was possible or practicable by the chemical process of the battery.

Without entering into perplexing details, the essential parts of the dynamo, and its mode of action, may be briefly described. These parts are the armature, the field-magnets, the commutator, and the brushes.

THE ARMATURE. — The armature, in its usual form, consists of a number of coils of copper wire, wound on an iron ring, which is mounted on an axis and revolved between the poles of the field-magnets, as shown in Fig. 1. The iron ring or core of the armature may consist of a number of iron wire rings, or of flat rings

stamped out of thin sheet-iron, and placed vertically side by side, or of thin iron hoops laid over each other. These should be of the best soft iron, and electrically insulated from each other by varnish, asbestos, mica, or other suitable insulator. Solid iron cores are objectionable, chiefly on account of becoming heated; and the cores here described are greatly improved by having an open structure, so far as practicable, for the free circulation of air, by which the heating is greatly reduced. The insulation and composite structure, described above, are also important in giving the electric current its proper normal direction, and preventing the formation of the electric eddies, known as Foucault currents, which waste the energy and generate heat, a fault to which solid cores are especially liable.

The coils shown in the cuts are reduced to a few turns of wire and an open structure, but those in actual use consist of a number of layers closely wound like thread on a spool. The wire should be as large, and the number of turns in each coil as numerous, as practical convenience will admit; the resistance of the wire to the passage of the electric current, and the consequent heating, being reduced with increase of size, while the electric energy increases with the number of turns; each turn adding its quota to the current generated, provided the amount of copper is thereby increased; but there is no increase of energy by the mere substitution of fine wire for the same amount of copper in coarse wire. The wire in the coils, and in every part of the dynamo and its connections through which an electric current flows, must be covered with some good insulating material, which will confine the cur-

rent to the direction in which it is designed to flow, and prevent its escape from one turn to another, or to any object with which the wire may come in contact.

THE COMMUTATOR. — Figs. 1 and 2 show that the ends of the coils connect with cylindric segments at

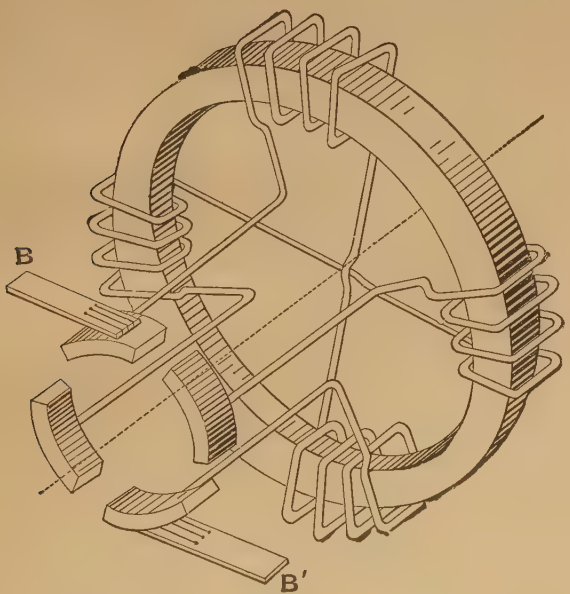

Fig. 2.

the axis of the armature: these constitute the commutator, whose use will be fully explained hereafter. Its segments are of copper or some other suitable metal, as phosphor-bronze, or gun-metal; the requisites being that the metal must be a good conductor, and not liable to heating or corrosion. They are attached to the axis, and insulated from it and from each other, and of the

same number as the coils; and special provisions are required to prevent the spaces between segments from becoming clogged with conducting material as copper-dust, or carbonized oil, by which the insulation is reduced or suspended.

Closed Circuit and Open Circuit Armatures.— In some armatures the coils connect with each other all around in a closed circuit, while each one connects also with a separate segment of the commutator, as shown in Fig. 1. In others they are arranged in pairs on opposite sides of the ring, each pair being connected with opposite segments of the commutator, and independent of all others, as shown in Fig. 2. The first kind are known as closed circuit armatures, as in the Gramme dynamo; the second kind as open circuit armatures, as in the Brush dynamo.

The Brushes. — The brushes by which the electric current is taken up and transferred through conductors to the lamp are shown in Fig. 2, in their usual position in contact with the commutator. They are made of copper, and are of different styles, as shown in Fig. 3, which shows the under brushes as viewed from above; the style at A consisting of two layers of wires soldered together at the upper end; the one at B, of two broad strips divided as shown for a certain distance from the lower end; the one at C, of several undivided strips of different lengths, overlapping each other. Sometimes two of these styles, as A and B, or A and C, are combined in the same brush. The main object is to obtain the best contact at numerous points, and to prevent the waste of energy and irregularity caused by sparking at the points of contact. The brushes are held in suitable clamps in the position shown in Figs. 1 and 2, their free

ends pointing in the direction in which the armature revolves; and a steady pressure is maintained by their elasticity.

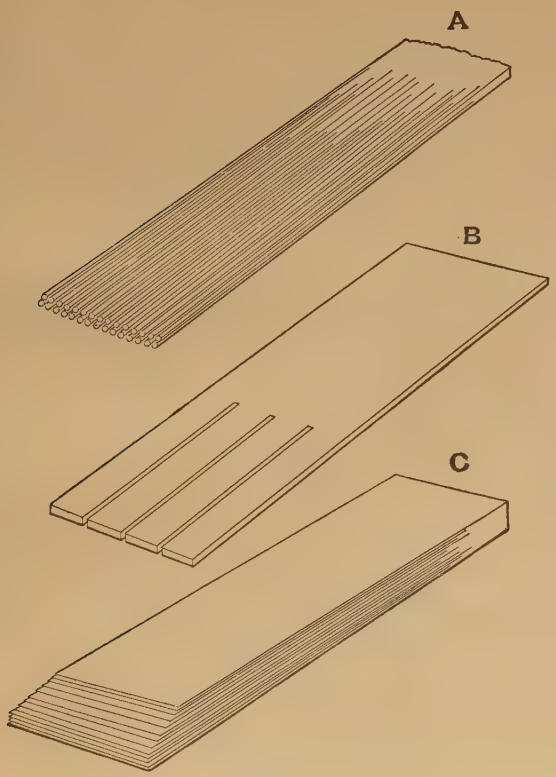

Fig. 3.

THE FIELD-MAGNETS. — In Fig. 1 we have an ideal representation of the field-magnets on each side of the armature, with their pole-pieces partly inclosing it. They may be permanent steel magnets or electro-magnets. Permanent magnets are suitable only for small

hand dynamos, designed for experimental laboratory work. For this purpose the permanent magnetism is an advantage, since there can be no such increase of force as to prevent the operation of the dynamo by hand, which might be the case with electro-magnets. But the low energy of permanent magnets as compared with electro-magnets, and their liability to partial loss of magnetism with age, render them unsuitable for dynamos of the energy required for the electric light.

The term electro-magnet is used to designate any magnet having an iron core wound with insulated wire, through which wire an electric current may be transmitted: the armature itself is such a magnet. The core becomes magnetic only while the current is flowing through the wire; and its magnetism ceases with the cessation of the current, leaving only a slight trace known as residual magnetism, which in dynamos has an important function, as will be explained hereafter.

The ends of every magnet are technically termed poles, distinguished respectively as north and south by the direction in which a straight bar magnet points when freely suspended, and marked N. and S. In the dynamo, north and south poles face each other; and into the space between them, in which the armature revolves, lines of magnetic force radiate, constituting what is technically termed the magnetic field; hence the magnets are called field-magnets. They may be straight magnets, as shown in Fig. 1, a single north pole facing a single south pole; or horse-shoe magnets, two north poles alternately facing two south poles. The core should be of the best soft iron, either wrought

or cast. The pole-pieces, which are considerably wider than the core, are curved on the faces, inclosing a large portion of the armature and confining all the lines of force, and are placed as close to the armature as safety of rotation will admit, so as to reduce the magnetic resistance to its minimum, as the lines of force traverse the field; the resistance of the air being immensely greater than that of the iron core of the armature.

Cast-iron is generally used for the pole-pieces, but wrought-iron is sometimes preferred; and a laminated structure, composed of numerous thin layers combined, is also recommended; the object being, as in the armature core, to give the lines of force their proper direction.

Large wire, well insulated, is as essential for the winding of the field-magnets as for that of the armature, for the reasons already given; and a greater body of wire in the central portion of the magnet than near the ends is recommended, as giving a more even current, less subject to sudden fluctuation, which, in an electric-light dynamo, is a very essential point.

The Dynamo's Mode of Action. — It has been shown that lines of magnetic force from the poles of the field-magnets radiate into the space between them, known as the magnetic field. The direction of these lines is from the pole technically known as the north to the one known as the south pole; and their number may be considered infinite throughout the field, though more numerous in some parts than in others. When a coil of wire is rotated in this field, temporary electric currents circulate in the wire at right angles to the

magnetic lines which pass through the coil, and the electromotive force of this current varies as the number of those lines.

Difference of Potential.—It is absolutely necessary, in the generation of these currents, that the magnetic intensity should vary, or, as technically termed, that there should be a difference of magnetic potential at different points; and this difference is produced by the different relative positions of the armature coils, as they rotate, with reference to the lines of force. As the object of every electric generator is to create and maintain a difference of electric potential, it is evident that if the arma-

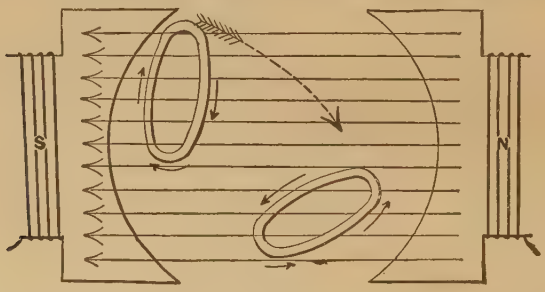

Fig. 4.

ture rotated in a uniform field with its axis parallel to the magnetic lines, so that the number intercepted by its coils was always the same, there would be no difference, either of magnetic or electric potential, and hence no current. The generation of current depends on the fact that the coils cut across those lines, continually changing position and intercepting a number varying from zero to a maximum; the position of each coil with reference to the lines being alternately reversed by the rotation of the armature, at each half-revolution, as shown by Fig. 4, producing alternate reversal of current.

The current always flows from the point where the electric pressure is greatest to the point where it is least; that is, technically, from higher to lower potential, just as water flows from a higher to a lower level, or steam rushes through a pipe from where the pressure is greatest to where it is least.

Reversed Currents.—The direction of the current, as stated, is always at right angles to that of the magnetic lines; and when by the rotation of the armature the movement of the coils, as viewed from the pole toward which the magnetic force moves, is upward next that pole, the current circulates in the coils in the same direction as the hands of a watch move, as shown at the upper left hand corner of Fig. 4; but when the movement is downward next the pole from which it moves, the direction of the current is reversed, as shown at the lower right-hand corner; the latter direction being known as the positive sense, and the former as the negative.

It is evident, then, that at each revolution of the armature two distinct electric currents are generated in its coils, one during each half-revolution; that each coil passes through two neutral points where the currents reverse, and where it intercepts a minimum number of the magnetic lines, and also through two points where it intercepts a maximum number. The generation of current begins at the instant the first neutral point is passed, increases as the difference in the number of lines intercepted per unit of time increases, diminishes as this number decreases, and ceases at the second neutral point. Here a new current begins, which passes through the same phases of increase and decrease during the second half-revolution, and the relative position of the coil being reversed the direction of the current is reversed also.

Each of these currents is transitory, its rise, fall, and reversal occupying only an instant, and passing into the external circuit through the brushes and commutator, or collector, as an undulation; and the continuous current of the dynamo is composed of a succession of these transitory currents, and is direct, if passed through a commutator, but otherwise, alternating, as explained hereafter.

It is not essential to the generation of an electric current that the wire should be in the form of a coil; a straight wire, or one bent into any conceivable shape, and forming part of a closed circuit, if moved through a field of varying magnetic intensity by rotation, or in any other manner, will have electric currents generated in it, whether it moves from greater to less, or from less to greater intensity. Or such a wire or coil, if moved through a perfectly uniform field in such a manner as to intercept a varying number of lines of force, per unit of time, will have electric currents generated in it. It is evident, however, that a perfectly uniform field between opposite north and south poles is a practical impossibility, magnetic intensity, north or south, decreasing from one pole to the other, each kind in the inverse ratio of increase in the opposite kind. The chief advantage of the coil consists in its capability of inclosing an iron core, which by its magnetic conductivity intercepts and leads the lines of force through it, in close proximity to the inclosing wire, so as to produce the highest inductive effect.

According to a theory now somewhat obsolete, the currents are generated by the lines of force threading through the coils, the interior wire thus taking part in the generation equally with the exterior; but experiment

seems to prove that this theory is fallacious, as no current is found in the interior and end wire when not continuous with the exterior; its office being apparently that of a conductor of the currents generated in the exterior wire.

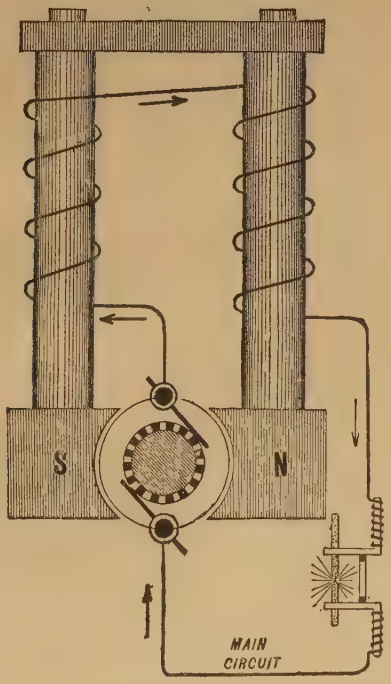

Fig. 5.

Commutation.—By reference to Fig. 5, it will be seen that the currents generated in the armature are taken up by the brushes and circulate in the direction shown by the arrows through the coils of the field-magnets and the external circuit in which the lamp is placed. If there were no commutator, the currents in this circuit would

be alternately reversed, and we would have the alternating-current dynamo, which constitutes a distinct class; but it will be seen by Fig. 6 that at the instant the armature current is reversed, the position of the opposite segments of the commutator with reference to the brushes is reversed also, each segment as it moves out of contact

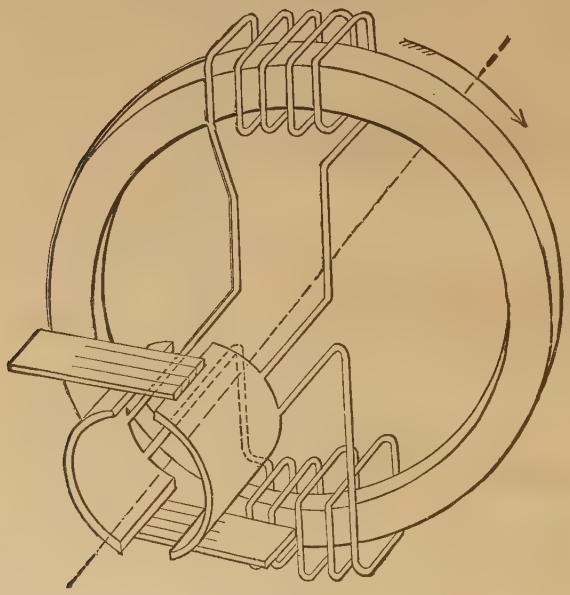

Fig. 6.

with one brush moving into contact with the opposite brush, so that each transitory current, generated in the connected coil, passes into the external circuit in the same direction by this commutation; for, as shown in Fig. 4, the current is always in the same direction in each of the two opposite positions of the coils, hence if taken up by each brush before reversal, all the currents must

pass out of the armature at one brush and into it at the other, as shown in Fig. 5, and therefore flow in the same direction through the external circuit.

But if there were only two segments and two coils, it is evident that a break in the current would occur at each half-revolution. But with four segments and four coils at right angles to each other, as shown in Fig. 7, and the

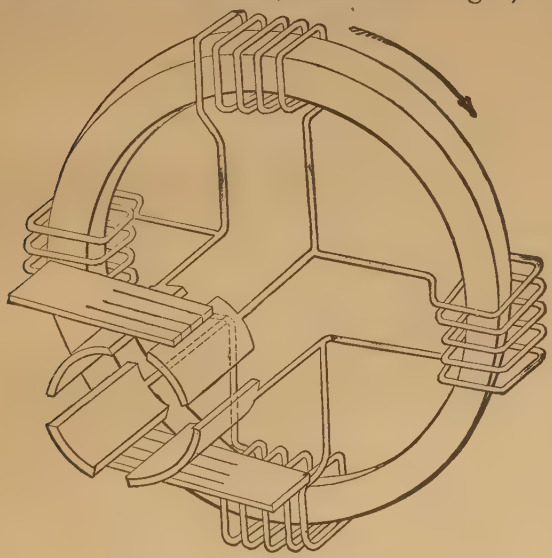

Fig. 7.

brushes so constructed as to make contact with the approaching segment before breaking contact with the receding segment so as to bridge the intervening space, the current becomes continuous, one pair of coils generating current while the other pair is passing the neutral points. But the current though continuous, would be uneven, rising and falling in waves as the coils passed from the neutral to the maximum points, and round

again to the neutral. This is corrected by multiplying the coils and segments, as shown in Fig. 1 (page 15), thus multiplying the number of waves and reducing their length and intensity in the same ratio.

In closed circuit armatures, as shown in Fig. 1, all the transitory currents on the same side reinforce each other, the coils being all connected together, and each connected also with a separate segment of the commutator, so that each coil has constant connection with the brushes, through the commutator, during the entire revolution of the armature. Hence if the brushes were placed at the maximum points it is evident that the opposite coils on each side would be carried past the neutral points by rotation before the connected commutator segments reached the brushes, and the generated currents be neutralized by the generation of reversed currents of equal strength, and the external current cease. But when the brushes are placed at the neutral points, all the currents generated on the left, when the rotation is in the direction of watch hands, as in Fig. 5, pass into the external circuit by the upper brush, while those generated on the right are augmented by the current flowing in from this circuit by the lower brush. Hence since no external current is obtained with the brushes at the maximum points, while a maximum current is obtained when they are at the neutral points, it is evident that, in any intermediate position, there must occur a partial neutralization by opposing currents; the neutralization decreasing and hence the electromotive force increasing as the brushes approach the neutral points, and these conditions being reversed as the brushes approach the maximum points.

By attaching the brushes to an insulating yoke by

which they can be moved simultaneously to any two opposite points, the electromotive force and resulting current can thus be regulated as required, within certain limits. But such regulation tends to increase sparking at the brushes, a wasteful and injurious heating effect, difficult to suppress. Dynamos with open-circuit armatures are susceptible of similar regulation.

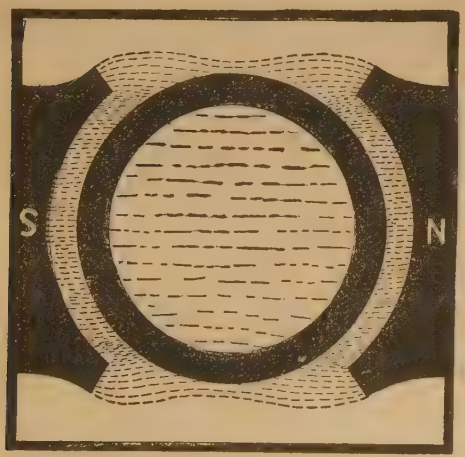

Fig. 8.

The Armature's Mode of Action.—If the armature were constructed without a core, or with one of high resistance, its energy would be comparatively low, depending solely on the electricity induced in its coils by the field-magnets. The principal advantage of the iron core consists, not only in furnishing a medium of high magnetic conductivity by which the lines of force are led into close proximity with the coils without loss, but

chiefly because it makes the armature itself an electro-magnet, acting reciprocally with the field-magnets to multiply the magnetic and electric effects by mutual reaction. In an armature without an iron core the lines of force would run nearly parallel from pole to pole; the concavity of the pole-pieces producing parallelism in lines which would be divergent if radiated from one plane surface to another. The same parallelism is found to exist when the magnets are separately excited, and the armature is not rotating, as shown in Fig. 8, where the lines passing into the armature in the central

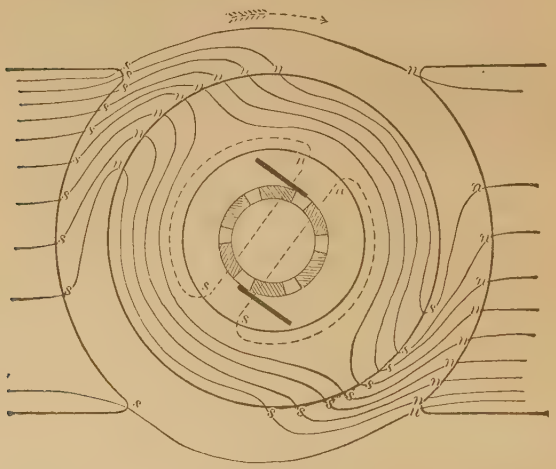

Fig. 9.

region are seen to be parallel, while those at the extremities of the pole-pieces, above and below, are slightly curved. It will be noticed that the lines are denser near the extremities of the pole-pieces than in the center, and

that the relative number passing through the interior of the armature is comparatively small.

The field-magnets induce opposite polarity in those portions of the armature core adjacent to each pole, as shown in Fig. 9, while the electric currents circulating in the armature coils induce in the same parts of the core, polarity similar to that of each field-magnet pole, north polarity on the right and south polarity on the left, when the rotation is in the direction indicated by the arrow. This polarity is much stronger than that induced by the field-magnets, and on account of the mutual repulsion between these poles and the similar poles of the field-magnets they are deflected into a position nearly at right angles to that of a line joining the field-magnet poles, as shown in Fig. 9, the north pole upward to *n n*, and the south downward to *s s*, the field-magnet poles being, for the same reason, deflected into the positions indicated in each by the letters *n* and *s*. Hence the lines of force become greatly contorted, as shown.

But the armature core does not become fully magnetized at the instant induction occurs, nor fully demagnetized at the instant it ceases, an infinitesimal moment being required for magnetic saturation in the first instance and demagnetization in the second, known as *magnetic lag*, during which its poles are moved slightly forward by the rotation, increasing the contortion of the lines.

These positions of the armature's poles become comparatively stationary, varying slightly with the speed of rotation, the core rotating through them, and the magnetic strength and polarity of each portion changing with its position. Hence the neutral line, where the currents reverse, is through the armature's principal poles, *n n*

and *s s*, its position being diagonal to that of a line through the centres of the pole-pieces.

When a new dynamo is completed and ready for use, it is found that the iron, during the various manipulations to which it has been subjected, has become slightly magnetic; and this residual magnetism, as it is termed, is the germ of magnetic and electric energy from which the full power of the machine is derived.

When the armature begins to revolve, and its coils intercept the lines of force from this residual magnetism, found in the field, incipient electric currents are generated in them, which, having been commuted into a single direct current and taken up by the brushes, circulate through the coils of the field-magnets. These incipient currents induce magnetism in the cores, and thus increase the magnetic intensity of the field, so that the armature coils intercept an increased number of lines of force. This increases the magnetism of the armature core, inducing greater energy in the electric currents generated; and these currents, passing into the field-magnet coils as before, continue to increase the magnetic intensity of the field. Thus, magnetism augments electricity, and electricity reacts to augment magnetism; and this series of reciprocal reactions between the armature and the field-magnets, and between the magnetism induced in the cores of each and the electricity induced in their coils, increases the magnetic and electric intensity of each in geometrical ratio, so that in a few moments the incipient current, induced by the feeble germ of residual magnetism, has become the powerful current which produces from a series of arc lamps a light of 100,000 candle-power.

When a dynamo stops running, its electric and mag-

netic energy cease, but it still retains the residual; so that, when put in operation again, its energy is rapidly developed, and the electric current generated as in the first instance.

It is evident from the manner of electric development as described above, that the electric energy generated must vary as the speed of rotation of the armature, so that the more rapid the rotation, the greater the energy developed. But there are certain limits which cannot be exceeded, dependent chiefly on the strength of material and the incidental development of heat. If the limit of strength is exceeded, the armature is liable to fly in pieces; and if too much heat is developed, the insulating material may be charred and permanently injured, or the electric and magnetic properties of the metals be temporarily reduced. The development of a certain amount of heat is inevitable, and it varies in different dynamos according to the method of construction. Hence the adjustment of speed in each case becomes an important item. Taking the number of feet in the circumference as a basis, the rate of speed in most dynamos varies from two to three thousand feet per minute, while in some it equals five thousand; that is, that number of feet of circumference passes a given point in a minute; and the number of revolutions per minute, in any case, can be ascertained by dividing by the number of feet in the given circumference.

To the ordinary observer, not versed in electric science, and especially to the mechanic, accustomed to visible, tangible resistance requiring power to overcome it, the resistance of the dynamo is a profound mystery. Here is an armature capable of being put in rotation by a few pounds pressure applied with the

hand, and rotating apparently in empty space; but through some invisible agency the resistance increases with the speed, till, in a few moments, an engine of a hundred horse-power is required to sustain the rotation. But this apparently empty space is the magnetic field through which radiate an infinite number of lines of force, cut by the armature coils, and generating the electric current in the manner described; so that the resistance, though invisible, is as real as that of the machinery of a factory. It is, in this respect, a resistance similar to that of gravity, unseen, intangible, yet real.

Series Shunt and Compound Winding.—Dynamos are divided into three classes, according to the method in which the field-magnets are wound and the relations of this winding to the external circuit, known respectively as *series*, *shunt*, and *compound* wound. In the series wound dynamo, illustrated by Fig. 5, the entire current traverses a single route of low resistance, passing in series through the armature coils, field-magnet coils, and external circuit, back to the armature; so that any variation of resistance, at any point, as by the introduction of a lamp or otherwise, affects the whole series equally; the current strength varying inversely as the resistance.

In the shunt winding, illustrated by Fig. 10, two distinct circuits are provided, an external circuit of coarse wire, and hence of low resistance, and a shunt circuit of fine wire and high resistance, wound on the field-magnets. The current divides at the upper brush in the inverse ratio of the resistance of each circuit, $1\frac{1}{2}\%$ to 20% traversing the shunt and employed exclusively to excite the field-magnets, while the main current flows through

the external circuit and is employed for useful work, as the production of light.

If the resistance of the external circuit is increased, as by the introduction of a lamp, the strength of its current is proportionately diminished; but the potential differ-

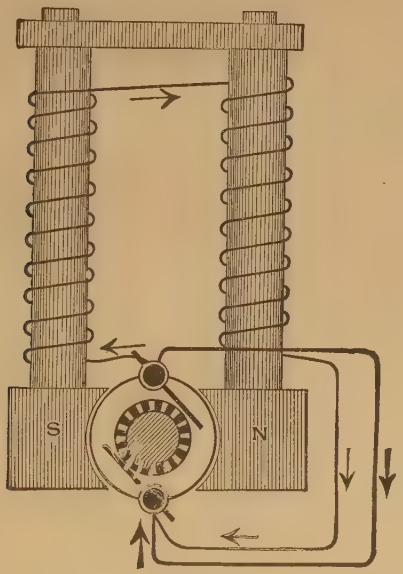

Fig. 10.

ence, or electromotive force, between the brushes, representing the electric pressure, is increased by the diminished flow of current in the ratio this increased resistance bears to itself plus the armature's resistance: and as the resistance of the shunt remains constant, the strength of its current is proportionally increased by this increase of electromotive force; and the magnetism of the core

being increased in the inverse ratio of its magnetic saturation by this increase of current strength in the shunt, its reaction increases the current strength in both circuits, thus supplying electric energy to overcome the increased resistance. By this series of adjustments an equilibrium between these various factors is established, the total electric energy developed varying as the mechanical energy expended. Decrease of external resistance reverses these results.

This increase of current strength in the shunt is relatively small as compared with decrease of that in the external circuit. Current is not diverted from one branch to the other, which would imply that the strength of the shunt current is increased to the same amount as that of the external circuit is diminished, but varies as the relative conditions of resistance and electromotive force vary with respect to the relative capacity of each branch of the circuit. The resistance of the shunt may be varied as required by resistance coils.

The compound winding, illustrated by Fig. 11, is a combination of the series and shunt methods; a shunt circuit of fine wire and high resistance being employed exclusively to excite the field-magnets, while a coarse wire circuit, of low resistance, is also employed for the same purpose, and connected with the external circuit, as in the series method. The automatic regulation is similar to that of the exclusive shunt method, except that the entire current flows through the field-magnet coils. This method is susceptible of very delicate adjustment and regulation by adjusting the relative resistances of the two circuits.

Each of these three methods of winding has its special adaptation to the requirements of a certain kind of work.

In electric lighting it is found that the series wound dynamo is usually the most suitable for arc lighting, and the shunt and compound wound for incandescent lighting; arc lighting requiring high electromotive force and comparatively small current, while the requirements for

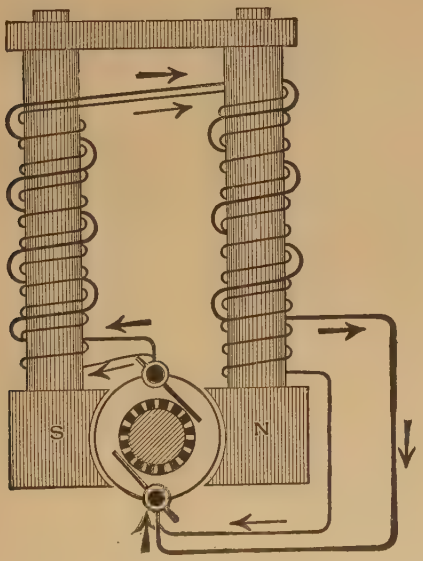

Fig. 11.

incandescent lighting are the reverse: which leads to the classification given below.

Constant Current Dynamo.—To maintain a number of arc lamps, connected in series, at a given illumination, a constant current flowing from lamp to lamp is required for each. If but one lamp were lighted the required

electromotive force, or potential, would be comparatively small; but if two were lighted, the resistance being doubled, the electromotive force must be doubled to maintain the same current strength; and the same ratio of electromotive force to resistance must be maintained for any number lighted or extinguished.

Hence the construction and regulation of a dynamo for such work must be such as to furnish electromotive force capable of variation within the required range; and a machine so constructed is known as a *constant current* dynamo, and is usually series wound, as stated above.

Constant Potential Dynamo.—But if the required work were the maintenance of a number of incandescent lamps connected in parallel, the lamps being on branches derived from the main circuit, the variation of resistance is confined to these branches, in which it becomes adjusted to the requirements of the current, the resistance of the main circuit remaining constant; hence the electromotive force remains nearly constant, and a machine adapted to such work is known as a *constant potential* dynamo, and is either shunt or compound wound.

Separate Excitation.—Fig. 11½ illustrates an important application of the shunt method to the *separately excited dynamo.* Here, as will be seen, the construction is the same as in Fig. 10, except that a magneto-electric machine, or dynamo excited by a permanent magnet, is introduced into the external part of the shunt, by which a separate magnetizing current is supplied, which reinforces that of the dynamo, and assists in maintaining constancy of potential.

In another style of separately excited dynamo, the magnetizing current is supplied exclusively by a smaller

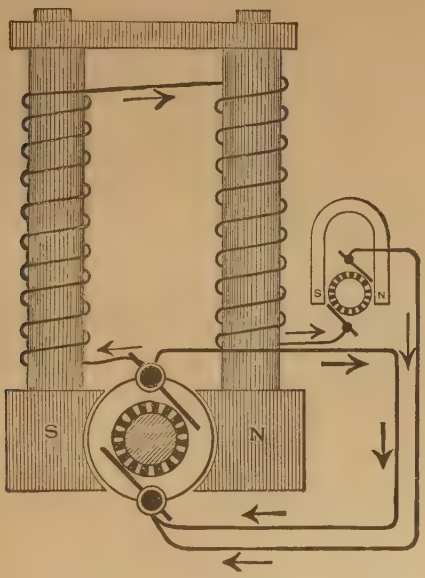

Fig. 11½.

dynamo, with whose circuit the terminals of the field magnet coils are connected, no part of this current passing through the armature.

CHAPTER III.

Alternating Current Dynamos.

Principles of the Alternating Current Dynamo. — Dynamos are divided, according to the nature of the current generated, into two classes, the direct current and alternating current, according as the current flows continuously in one direction, or alternately in opposite directions. For some purposes, especially that of electroplating, a continuous current in one direction is an absolute necessity, as a reversed current would, in this case, remove the metal deposited by the direct current; but in electric lighting, it is a matter of less consequence, continuity and steadiness being of greater importance than direction of current.

It has already been shown that the continuous current is made up of a succession of transient, momentary currents collected into one; and that, by means of the commutator, these are all made to flow in the same direction. But for the purpose of continuity, it is immaterial whether these momentary currents are in the same direction or in opposite directions, provided there is no perceptible break between them. The case is analogous to that of a circular movement as compared with an oscillating movement in mechanics: the rapidity of movement in each case may be such that the eye can not distinguish between the separate impulses,

so that the oscillating may appear as continuous as the circular.

Thus far we have confined our attention to the direct current dynamo; but in certain departments of electric lighting, the alternating current dynamo is preferred, hence its description here is of importance. Fig. 12 is a fair illustration of the style of construction as found in several machines of this class, and shows the

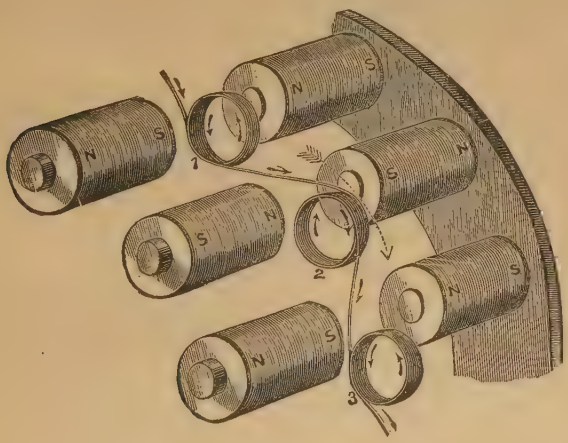

Fig. 12.

typical points of difference between these dynamos and those we have been considering. Here it will be seen that both the armature and the field-magnets are composed of a number of coils, wound on bobbins, and attached to the circumference of circular supports. In the cut the supporting ring and also the bobbins are omitted from the armature, the coils alone being shown, so as to give a better illustration of the movement of the currents. The planes of the armature coils are parallel with those of the field-magnets, and the direc-

tion of rotation parallel to the planes of the coils, the axes of the coils being parallel to the axis of rotation. In some of these machines the armature coils have iron cores, while in others the cores are of wood. The Siemens-Halske alternating current dynamo is constructed according to the latter method, copper ribbon insulated by vulcanized fibre being used for the coils instead of wire.

By reference to Fig. 12 it will be seen that the north and south poles of the field-magnets alternate in position, opposite poles facing each other in the usual manner. As this causes a reversal of direction in the lines of magnetic force between each alternate pair of magnets, a corresponding reversal of current is produced in each alternate coil, as shown by the position of the arrows; and as these opposite currents would neutralize each other, this again is compensated by a reversal in the winding; the wire, as it leaves the bottom and front face of one coil, being led over to the top and rear face of the next coil, so that the momentary armature currents, generated as the coils simultaneously pass the field-magnets, all flow in the same direction, as shown by the arrows between the coils, while at the next instant this current is reversed, as the rotation changes the position of the armature coils. So that, following any one coil as it rotates, there occur as many reversals as there are pairs of field-magnets.

Instead of the commutator these machines have a collector similarly placed, as shown in Fig. 13, consisting of two flat metal rings, mounted on the shaft, and insulated from each other. To these are attached the two terminals of the wire composing the coils, as shown,

and each transient current generated passes into the outer circuit through the brush which presses on one ring, and is returned through the brush which presses on the other ring, traversing the outer circuit and armature coils in the direction indicated by the arrows at one instant, while at the next this direction is reversed, as already explained.

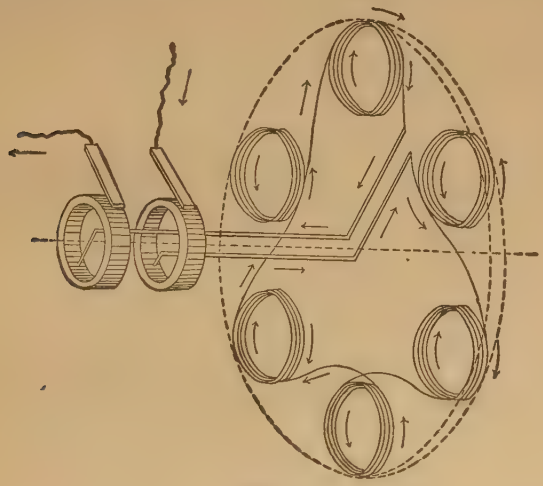

Fig. 13.

Wooden cores are preferred to iron for the armature in the type of alternating current dynamos which we have been considering; the great intensity of the magnetic field, and the incessant reversal of polarity in iron cores with each reversal of current in such machines, generating the Foucault or eddy currents in the cores, and thus reducing the energy by heating. As the object of the iron core is to increase the magnetic intensity, and to prevent its loss by leading the lines of force through the coils, it is evident that

it can easily be dispensed with in a field already sufficiently intense, and between poles separated only by the thickness of the armature instead of its diameter.

There are two methods of connecting the armature coils in alternating current dynamos, known respectively as the series and the parallel. These are illustrated in Fig. 14, the series method at *A*, and the parallel at *B*. In the series method it will be seen that the current

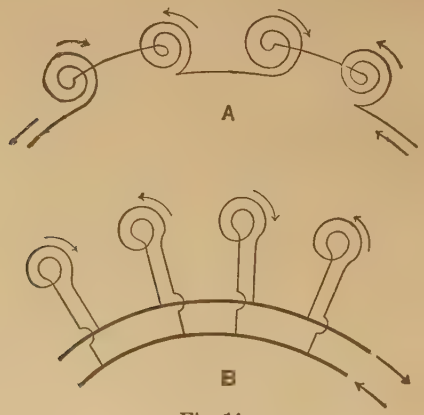

Fig. 14.

flows from coil to coil by a single wire; while in the parallel method the ends of each coil are joined to two separate wires, and the current divided between them. The series method gives the greatest E. M. F., or electric pressure, and also the greatest internal resistance; while in the parallel method the internal resistance is reduced, and the volume of current increased in the same ratio. This becomes apparent when we consider that since resistance in a conductor is inversely as the

area of its cross-section, doubling the number of wires, if of the same size, doubles this area, halves the resistance, and doubles the volume of current. Hence if, in electric lighting, large current and small pressure are required, the parallel method is preferred; while if high pressure and small current are required, the series method has the preference. In both methods the alter-

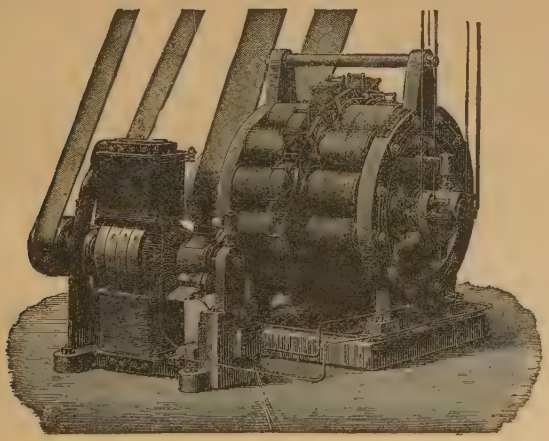

Fig. 15.

nate coils are wound in opposite directions for the reason already given, as shown in Fig. 13.

THE SIEMENS-HALSKE DYNAMO. — Fig. 15 is a perspective view of a late style of the Siemens-Halske alternating current dynamo. The field-magnets are excited by a separate current furnished by a small, constant current dynamo, as shown; this arrangement having been found better adapted to the purpose in this style of construction than self-incitement by the alternating current.

THE LONTIN DYNAMO. — Among the older alternating current machines is that of Lontin, the armature of which consists of coils wound on iron cores radiating from the central axis like the spokes of a carriage-wheel, while the field-magnets, similarly constructed and of the same number, are attached to the interior surface of an outer rim inclosing the armature; the whole arrangement resembling a carriage-wheel with the spokes cut off near the outer rim; the rim with its stubs constituting the field-magnets, while the interior constitutes the armature; the bobbins tapering towards the center, and ending in short bevels at their outer extremities. This machine is capable of being so arranged that it can produce a number of separate, independent electric circuits, or unite them so as to produce one or more circuits of varying strength. By this arrangement twelve independent lamp circuits can be supplied from a machine having an armature with twenty-four bobbins, or all these can be united into one. Brushes are dispensed with, the currents being taken from binding-posts attached to the electro-magnet rim on opposite sides, switches being arranged on one side by which the several circuits can be united or separated as required. This feature of furnishing independent circuits is found also in some direct current machines of the older styles, but improvements in the construction of the lamp circuit have rendered such independent circuits unnecessary.

THE GORDON DYNAMO. — Gordon's large alternating current dynamo, shown in Fig. 16, is one of the most powerful yet constructed, being capable of feeding 5,000 incandescent lamps of twenty candle-power each. The armature is stationary, while the field-magnets rotate.

The latter consist of sixty-four coils, wound on brass bobbins, placed on cylindric iron cores on opposite sides of the rim of a central rotating disc, thirty-two on each side, the cores extending through the disc, and projecting on either side. The armature coils are attached to two exterior fixed discs, one on each side of the rotating disc, there being sixty-four coils on each stationary disc, 128 in all. The cores of the armature coils, like

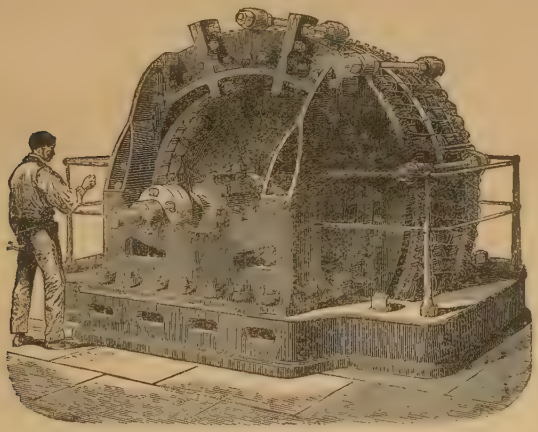

Fig. 16.

those of the field-magnets, are of iron, but wedge-shaped, tapering toward the center, German silver being used for the flanges to resist the circulation of electric currents. Each disc is eight feet nine inches in diameter: the total weight of the machine is twenty-two tons, and that of the central rotating magnet disc seven tons. The latter has a speed of 140 to 180 revolutions per minute, and a direct attachment to the steam-engine, without belting. All the framework is of iron, the rotating disc of wrought-iron, and the fixed

discs of cast-iron; and wood is used to insulate the bobbins from the frame. The field-magnets are excited by two constant current dynamos, the current which circulates through their coils being received by brush contacts on two insulated metal rings, fixed on the central shaft on opposite sides of the machine; while the induced current, which feeds the lamps, is taken directly from the coils of the fixed armature; their terminals being attached to insulated binding posts on the rims of the armature discs. Thus any irregularity in the lamp circuit which might arise from brush contacts in a machine with such powerful currents is obviated.

Since there are twice as many armature coils as field-magnet poles, it is evident, that, as the magnet disc rotates, its sixty-four poles can induce electric currents in only sixty-four armature coils at a time, leaving each alternate coil of the armature idle; at the next instant the sixty-four idle coils come into action while the others rest; and this alternation of action and rest continues at each successive instant. In the original construction there were only sixty-four armature coils; but it was found that the mutual induction between adjacent coils caused a loss of fifty per cent of the current, while, by having an idle coil between each two active ones, this inductive effect is neutralized. The armature coils are thus divided into two groups, the oddly numbered ones constituting one group, and the evenly numbered another group, each group constituting an independent circuit; and these two circuits can be used separately, or joined in parallel or in series, according to the requirements of the lamps.

As the north and south magnet poles alternate, the

alternations of current produced at each revolution equal $64 \times 128 = 8{,}192$. And this product, multiplied by 180, the maximum number of revolutions of the magnet disc per minute, gives $180 \times 8{,}192 = 1{,}474{,}560$ alternations per minute, when running at maximum speed.

The advantage gained by the revolution of the field-magnets instead of the armature consists in the fact that the rotating disc is capable of a much stronger construction, being made of massive wrought-iron, a construction which would not be suitable for the armature for obvious reasons. This disc acts as a fly-wheel, giving steadiness of motion, and neutralizing irregularities in the movement of the engine, which would otherwise produce fluctuations in the light. Direct attachment to the engine also prevents unsteadiness which often results from slipping of the belt.

For large electric lighting installations there are obvious advantages in the use of such powerful dynamos as the one just described. The steadiness of the light depends largely on the generator. A fluctuating current must produce a fluctuating light. Even in the best regulated systems, a certain amount of irregularity is unavoidable; but, if this irregularity is divided among five thousand lamps, its effect is far less perceptible than if divided among a smaller number.

Another advantage is found in the economy of labor; large machines requiring less attendance, in proportion to the results produced, than small ones.

The Westinghouse Dynamo. — This is an alternating current machine, designed solely for incandescent lighting. Fig. 17 is a side view, and Fig. 18 an end view, from which the construction will easily be understood.

The field-magnets, bolted to the external frame of the machine, form a circle, radiating inwards toward the armature, which is mounted in the center on standards rising from the base. They are of elliptical form, the longer axis of a cross-section of each core being parallel

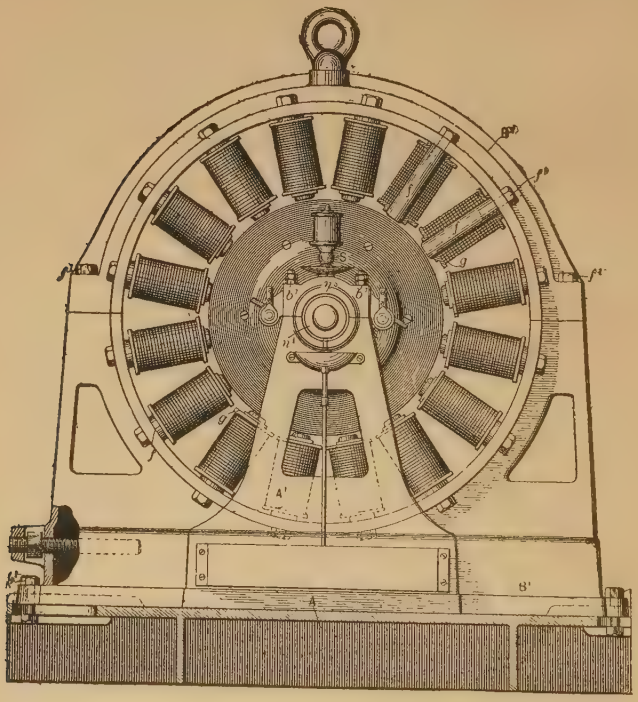

Fig. 17.

to the armature shaft, as shown at *f* and *g g*, Fig. 18, the edges of the cores being shown at *f f*, Fig. 17. The winding of each magnet is opposite to that of the adjacent one, so as to produce alternate north and south polarity. The coils are slipped on the cores after being wound.

The armature core is composed of sheet-iron discs, insulated by paper, and having tubular openings for ventilation parallel to the axis, as shown at *i k*, Fig. 19; a great number of these being laid together, the open-

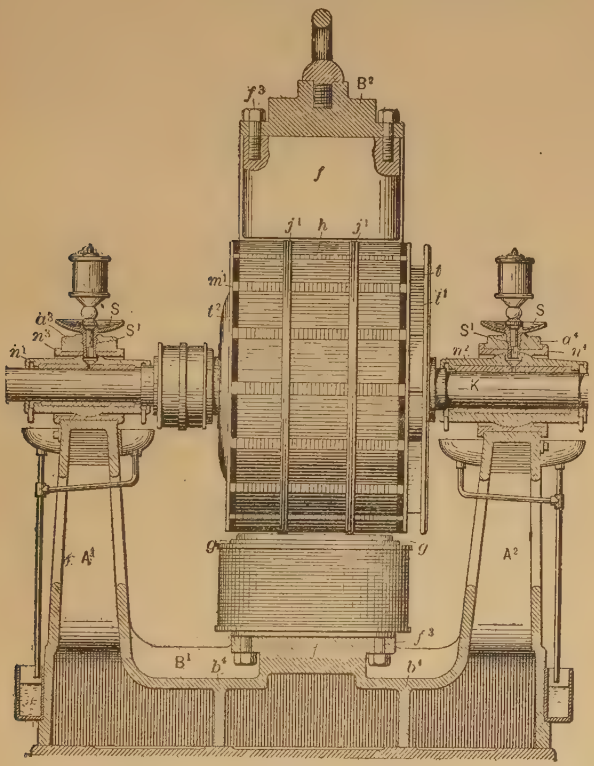

Fig. 18.

ings registering to form the tubes, and then bolted together by end plates, as shown. The winding differs from that of the Gramme armature in having no interior wire. The coils consist of single layers of wires,

wound on the external surface of the core, and looped around projections, m^1 m^2, at the ends, attached to non-magnetic rings, o^1; so that the planes of the coils are at right angles to the radii of the armature, and there are no crossing wires at the ends, as in the Siemens; nor

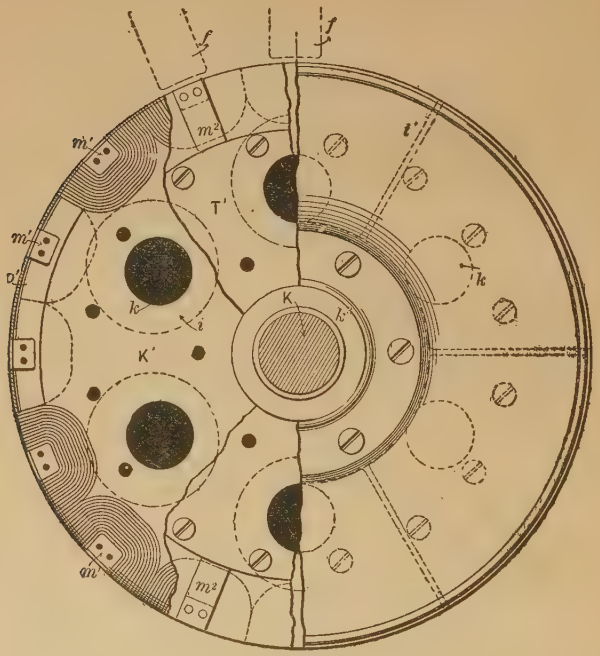

Fig. 19.

wire in the interior of the ring, as in the Gramme; the ends being exposed for ventilation through the tubular openings in the core. Adjacent coils being wound oppositely as in the field-magnets, as shown in Fig. 20, generate alternating, opposite currents. The coils are insulated from the core with mica, and also covered

externally with the same material, and firmly bound by the bands $j^1 j^1$, Fig. 18. The entire weight of copper wire on the largest armature does not exceed sixteen pounds.

The space between the armature and field-magnets being only three-sixteenths of an inch, and there being only a single layer of wire on the armature surface, both the coils and the core are in close proximity to

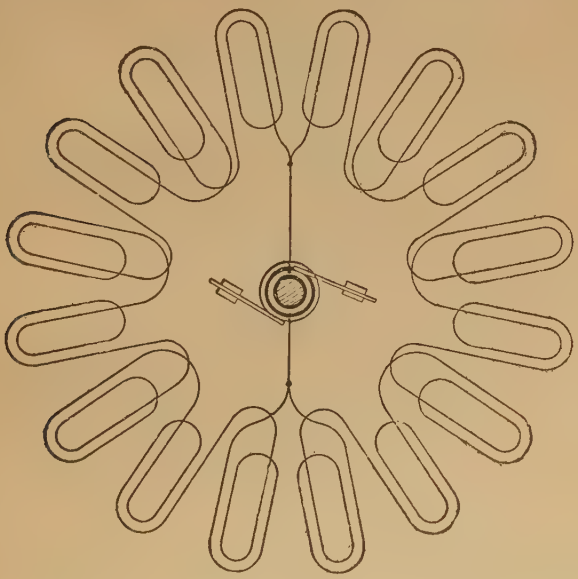

Fig. 20.

the field-magnets; and hence the magnetic and electric reciprocal actions are at the maximum, and there is no dead or partially inactive wire in the interior; all the wire, except a very small percentage on the ends, being exposed to the full action of the magnetic field.

The object of this dynamo being to generate an electric current at a high potential, and pass it primarily

through a high resistance, better results are obtained by the use of a separate exciter than by attempting to employ self-excitation. A Stanley, direct current, shunt wound dynamo is used for this purpose; the wires connecting with it being shown at the base in the perspective view, Fig. 21, while the wires extending

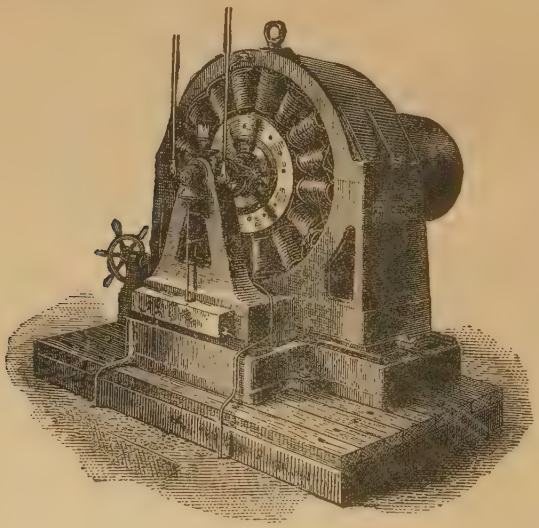

Fig. 21.

upward from the collector connect with the lamp circuit.

The weight of the largest machine is 13,500 pounds; its speed, 1,175 revolutions per minute; and the electromotive force employed in the main circuit from 1,000 to 1,100 volts. It feeds 2,500 incandescent lamps. By the screw shown near the base at the left, the machine can be moved on its base to regulate the tension of the belt.

THE CONVERTER. — A very important feature of the alternating system of electric lighting of which this machine forms a part, is the converter, or transformer, which may be described as an inverted induction coil.

The ordinary induction coil is made with two helices insulated from each other: an external helix of long, fine, insulated copper wire, having many turns, incloses a helix of shorter, coarser wire, having comparatively few turns, and this incloses a core composed of a bundle of iron wires. The interior helix, known as the primary, when connected with an electric generator magnetizes the core, which, by reciprocal action, increases the strength of the electric current; and the primary circuit being opened and closed with great rapidity by a circuit-breaker, a series of alternate currents in opposite directions is induced in the secondary circuit; the electromotive force of these induced currents as compared with those in the primary being increased in the direct ratio of the increased number of turns. In such a coil, electromotive force is increased at the expense of current strength; but in the converter, strength is increased at the expense of electromotive force. This is effected by connecting the high resistance coil with the generator, and the low resistance coil with the lamp circuit, the alternation being produced in the dynamo.

In the induction coil, the core, being in the center, is separated from the secondary helix by the interposition of the primary, and hence its magnetizing effect on the secondary is reduced as the square of the distance represented by the thickness of the primary. In the Westinghouse converter this arrangement is partially

reversed, the two coils being placed side by side, and inclosed within an iron envelope which fulfills the magnetizing function of the core, both coils being thus brought into close contact with the iron. This closeness of contact is effected more perfectly by dividing the converter into connected sections having compara-

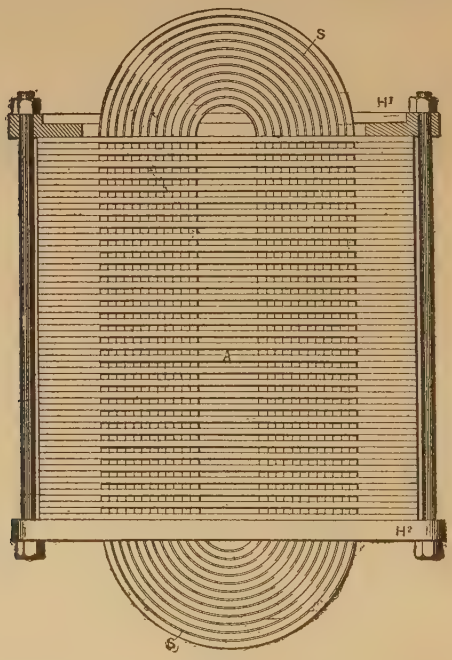

Fig. 22.

tively thin coils instead of using a single large converter requiring great thickness in the coils. The magnetizing envelope is composed of sheet-iron plates, insulated from each other, placed at right angles to the longer axis of the elliptic-shaped coils, built up around them, and bolted together; the proportion of iron in the

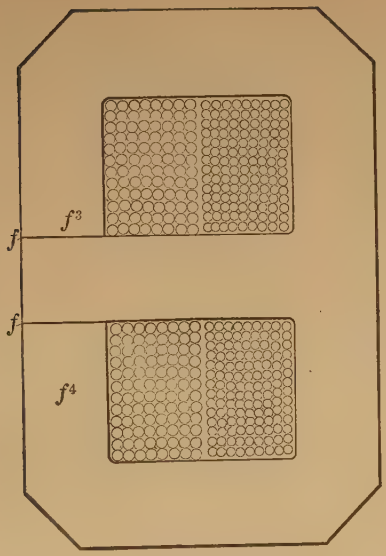

Fig. 23.

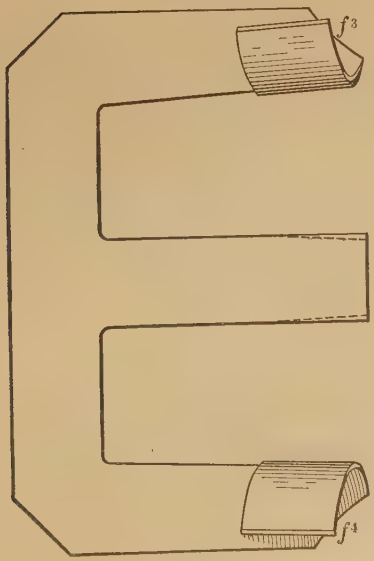

Fig. 24.

envelope to that of copper in the coils being as $2\frac{3}{5}$ to 1. The loss from electrical conversion in a reduction from 1,000 volts in the primary to 50 in the secondary is said not to exceed five per cent.

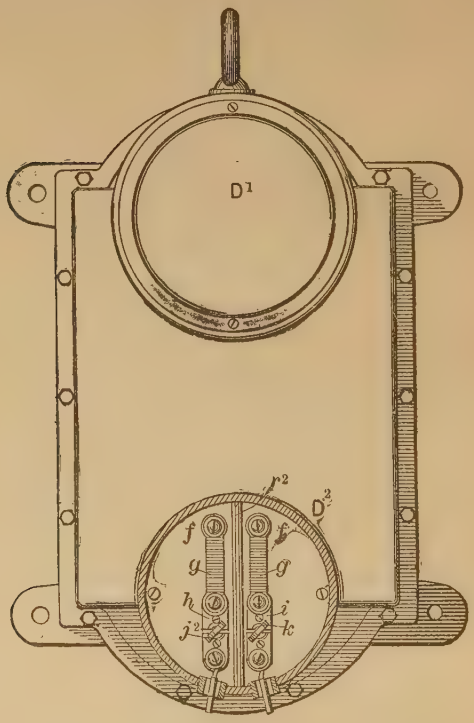

Fig. 25.

Fig. 22 gives a front view of the converter, and Fig. 23 a view in cross-section; the fine wire at the right showing the primary coils, and the coarse wire at the left the secondary; and *f f f f* the magnetizing envelope; the edges of its plates being shown at *A*.

The coils, composed of covered wire, and thoroughly

insulated from each other and from the plates, are first wound on a form, and the plates, shaped as in Fig. 24, built up around them; the ends, f_3 f_4, being first bent back as in Fig. 24, and then laid flat as in Fig. 23. The plates are then bolted together by means of the

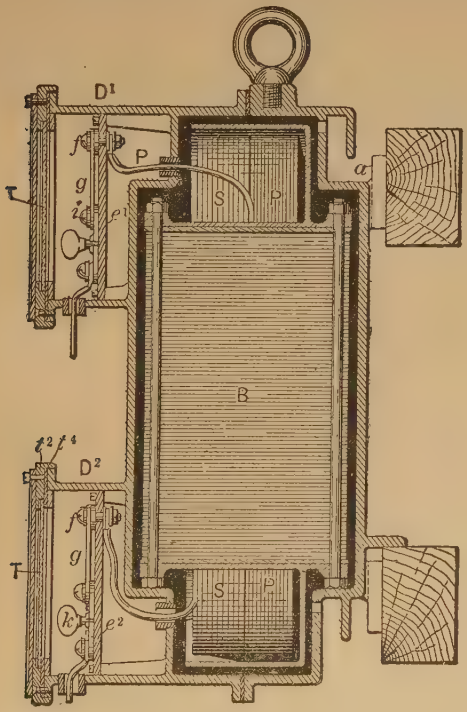

Fig. 26.

end frames, H_1 H_2, Fig. 22. and the apparatus inclosed in the iron case shown in Figs. 25 and 26, by which it is protected from dampness, injury, and accidental contact with electric wires; the cases being arranged for convenient attachment, as shown.

Fig. 25 is a front exterior view of the case, and Fig. 26 a sectional end view of its interior; the terminals and connections of the coils being inclosed in the compartments D_1 D_2, fitted with glass, T T, in front to permit inspection; the primary and secondary being separated from each other in each compartment by insulating plates, as shown at r^2. One terminal of the primary coil is shown at P above, and one of the secondary coil at S below, in Fig. 26; the positions of the other terminals, above and below, being easily understood from Fig. 23. The terminals are attached to the bolts, f f, mounted on the insulating plates, e_1 e_2; g g, being safety fuses, h and i switches, and k and j^2 plugs for opening and closing the connections.

CHAPTER IV.

Direct Current Dynamos.

The Edison Dynamo.—Among the direct current dynamos the Edison is specially noted for its peculiar construction, though in the later styles its distinctive features have been considerably modified. The following brief description, illustrated by Fig. 27, embraces the leading features of the machine as now constructed in the United States. Its field-magnets consist of vertical cylinders, with large wrought-iron cores, resting on massive cast-iron pole-pieces which nearly inclose the armature; the extreme length of core found in the older styles having been reduced, and the diameter correspondingly increased so as to preserve the massiveness, a feature which, in both cores and pole-pieces, it is claimed, increases the magnetic intensity of the field, and lessens the liability to magnetic saturation of the iron.

The armature is drum-shaped, and in its general appearance very much resembles that of the Weston dynamo shown at *C* in Fig. 28. Its core consists of a number of sheet-iron discs, insulated from each other by tissue paper, as in the Westinghouse, and mounted on an iron shaft, but insulated from it by an interior cylinder of lignum vitæ, while an external covering of paper insulates it from the coils. These consist of cotton-covered copper wire, stretched longitudinally,

and grouped together in parallel, twelve wires, more or less, in a group; all the groups being so connected as to form a continuous closed circuit. These groups are arranged in concentric layers, and are of the same number as the segments of the commutator, the ends of the

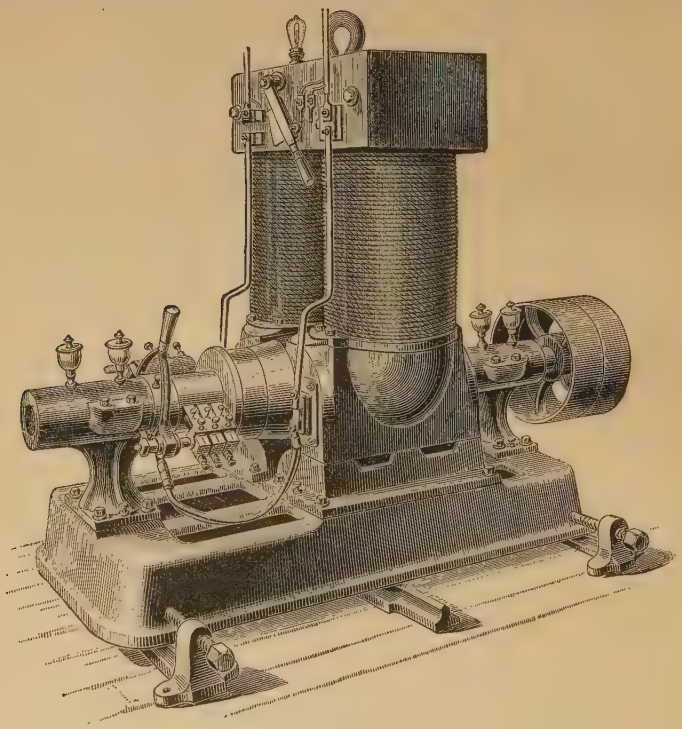

Fig. 27.

wires in each group being attached to arms connecting with the commutator segments as shown in the Weston, Fig. 31; a spiral arrangement being adopted in making the connections between the straight portions of the wire and the arms. The object of grouping is to secure

flexibility for winding by the use of small wire, and low electric resistance by having several wires in parallel,

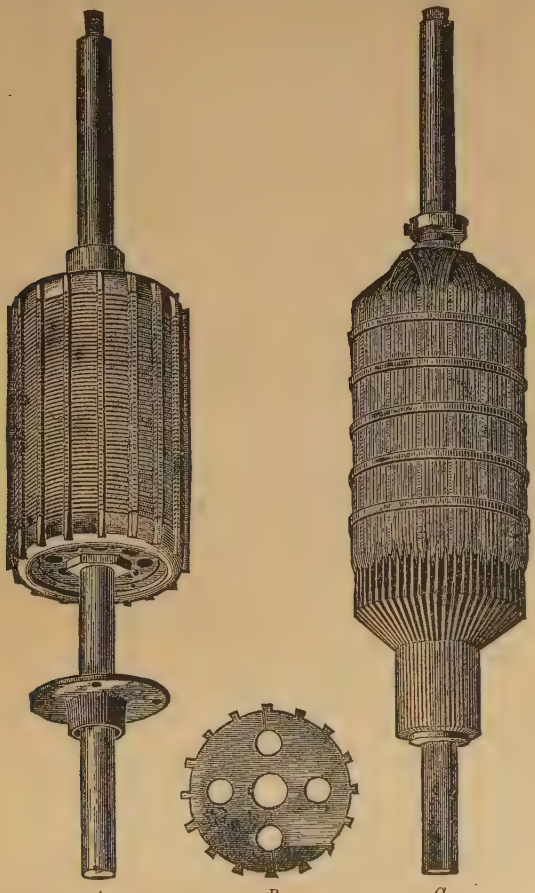

Fig. 28.

the effect as to resistance being practically the same as if the several wires were combined in one. At the ends

the wires are insulated from the core by discs of vulcanized fiber with projecting teeth similar to that shown at *B* in Fig. 28. The discs of the core are bolted together by insulated rods, and the coils are confined by brass bands surrounding the armature.

The bar armature, formerly used in the large Edison dynamos, has been abandoned. Its coils consisted of copper bars instead of wires, insulated by air spaces, and attached at the ends to copper discs, similar to the iron discs of the core, and mounted and insulated in a similar manner; there being as many discs as bars, two bars attached on opposite sides to two discs forming a coil.

The brushes are composed of several layers of copper wires, combined with flat copper strips, two layers of wire being placed between each two strips, an arrangement which is claimed to give a very perfect connection, and to prevent sparking by furnishing numerous points of contact; the copper strips confining the wire, and making the brush more compact.

THE WESTON DYNAMO. — This dynamo also belongs to the drum armature type. The armature is shown at *C* in Fig. 28, and its core at *A*. The core, like that of the Edison, is composed of sheet-iron discs mounted on a central shaft, one of the discs being shown at *B* in Fig. 28. But the armature, instead of having a compact structure like that of the Edison, has an open structure. The discs are separated from each other at the center by small insulating washers, shown in Fig. 29 by a dotted line; each disc is perforated as shown, and has a number of cog-like projections on its circumference; these projections extend in straight lines along the core lengthwise, leaving depressions between them to receive the coils, and bringing the holes in the discs

opposite to each other, as in the Westinghouse. The ends of the core are finished with thick discs, curved on the outside to prevent sharp bends in the wire. The coils lie in the depressions, and are separated from each other by the projections; and a flange on the shaft at each end of the core separates the crossing wires, giving them an open structure around the shaft. Free circulation of air through every part of the armature

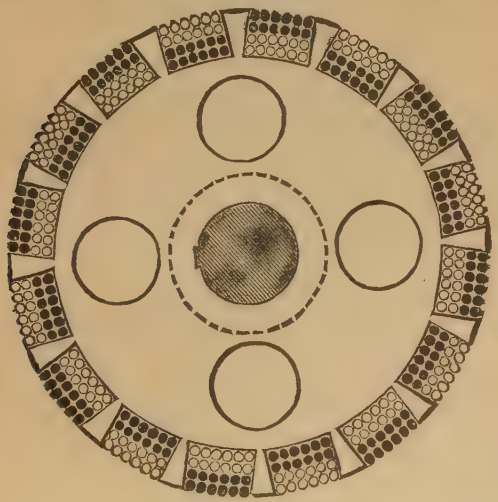

Fig. 29.

is thus amply provided for, the open spaces between the core projections on the surface communicating with the longitudinal tubular openings in the interior; so that, when the armature is in rotation, air currents are constantly flowing through it, between the discs and around the coils, rendering over-heating, with its injurious effects, an impossibility.

The advantages of the laminated structure of the

armature core in both the Edison and Weston dynamos is obvious in preventing the formation of Foucault currents, and in placing the iron discs parallel to the lines of force in the magnetic field. The Weston has a further advantage in the projections extending beyond the surface of the coils into close proximity with the pole-pieces of the field-magnets, thus reducing the magnetic resistance to its minimum. In the attachment to

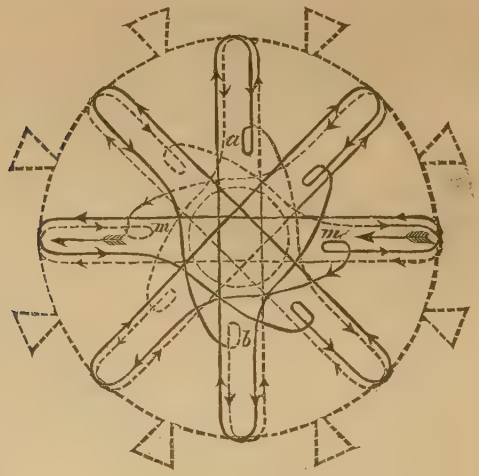

Fig. 30.

the shaft, advantages are claimed for both machines, the Edison for the insulation of the core from the shaft, and the Weston for its direct connection which permits the lines of force to pass through the shaft, while in the Edison they must circulate round it.

This armature is not wound, like the Edison; the coils being composed of single large No. 6 wire, instead of numerous small wires grouped in parallel. The methods of winding vary in different Weston

machines, but the prevailing style is shown in Figs. 29, 30, and 31; Fig. 29 representing the coils in cross-section, Fig. 30 showing the connections with the radial arms of the commutator, while Fig. 31 shows the coils, commutator, and connections in perspective. The

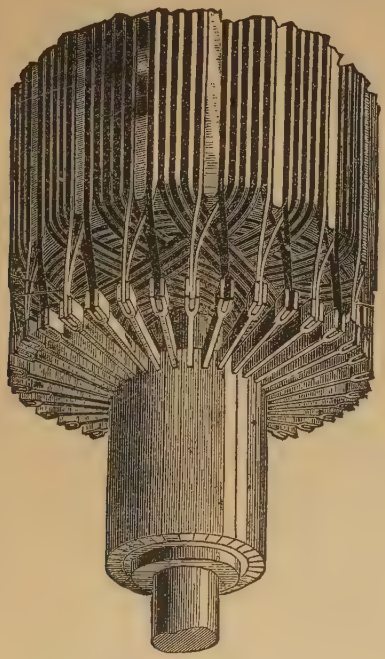

Fig. 31.

method of winding gives two circuits, which are distinguished from each other in the cuts by dark and light shades. Beginning at *a* in Fig. 30, and tracing the dark line, it will be found continuous round to *b*; and tracing the dotted line in the opposite direction, it will also be found continuous from *a* to *b*, the two lines

being joined together at those points. Each of the short loops near the center represents a connection with a radial arm of the commutator, and Fig. 31 shows that these connections with the two circuits are made with alternate arms respectively, while Fig. 29 shows the alternate positions of the coils as they lie in the depressions between the projections of the core. The arrows and arrow-heads in Fig. 30 show that the electric currents flow in opposite directions in the separate circuits represented by the full and dotted lines; and an inspection of Fig. 29 will show that this is a necessary result of the alternate positions of the coils as they pass through the magnetic field, each passing the neutral points alternately in advance of the other. But this does not interfere with the constancy of the current in one direction as it enters and leaves the main circuit at the commutator.

The field-magnets of the Weston dynamo are shunt wound, the circuit by which they are excited being entirely independent of the lamp circuit, as explained on page 38. The pole-pieces are partly divided into sections by a number of vertical openings, as shown in Fig. 32, and their projecting lips approach more closely in the center of the armature than at the extremities; an arrangement which, it is claimed, has an important influence on the magnetic intensity of the field, tending to produce greater uniformity of inductive action. The pole-pieces are placed above and below the armature, as shown, and have opposite polarities; each pole-piece connecting the similar poles of two horse-shoe magnets, placed one on each side of the armature; the two north poles being joined to the upper pole-piece, and the two south poles to the lower

pole-piece. By this arrangement a complete magnetic circuit is obtained with "consequent" poles, as they are termed, above and below, and the magnetic resistance is reduced to its minimum. Formerly each magnet had six cylindric cores, three above and three below on each side, twelve in all; each core being wound with a separate coil, and all the coils joined in series: but, in the later styles, one elliptic core has been substituted for each set of three, making two for

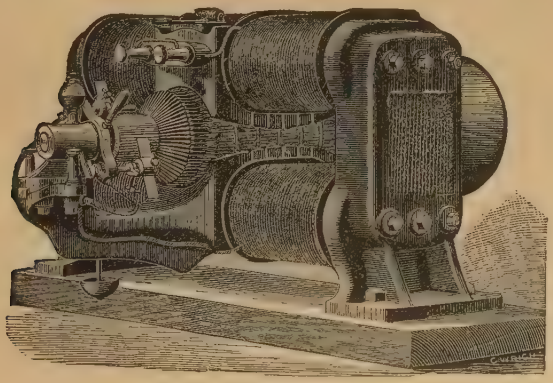

Fig. 32.

each horse-shoe magnet, each pair extending horizontally on opposite sides of the armature, being joined to a vertical iron yoke at their outer extremities, while the inner extremities are joined to the pole-pieces as already stated; the coils, joined in series, being traversed by the entire current.

In this dynamo, as in the Edison, massiveness in the cores and pole-pieces is a prominent feature, while the vertical sections into which the pole-pieces are divided tend to prevent the formation of Foucault currents.

The complete magnetic circuit with consequent poles is a feature of several different dynamos, and was first introduced by Gramme.

The drum armature with longitudinal winding, found in the Edison and Weston, is also a feature common to several different dynamos; this method of winding having been first invented by Siemens, and the drum form of armature subsequently by his partner, Hefner von Alteneck. Its chief advantage over the ring armature consists in its freedom from internal wire, which, apparently, takes no part in the electric generation, serving only the purpose of a conductor, as has been shown, and hence adding to the cost of construction without corresponding advantage, if, as claimed, none is gained by the lines of force threading through the coils. While, in the drum armature, this would be true only of the end wire, all the side wire cutting the lines of force, and hence taking an active part in the electric generation.

The brushes of the Weston dynamo consist of a number of flat copper strips overlapping each other, each strip being divided into three tongues. The yoke, already referred to, by which the brushes can be rotated, by hand or otherwise, so as to change their position on the commutator, and thus vary the electromotive force, is shown in Fig. 32, and also in Fig. 27. The Weston armature being wound with two circuits, as described, each attached to an alternate segment of the commutator, it is impossible for the coils to become short-circuited and overheated by an accidental connection, from copper dust or otherwise, between two adjacent commutator segments.

The internal resistance of this dynamo, both magnetic and electric, being reduced to the minimum, and the counterpoise between the resistance of the main circuit and that of the derived, parallel circuits on which the lamps are placed, very nicely adjusted, ninety-nine out of a hundred incandescent lamps, fed by its current, can be instantly extinguished without perceptibly affecting the light of the remaining one.

The Sperry Dynamo. — The Sperry dynamo presents some important features which deserve special notice. It is constructed with special reference to rendering the interior wire of the Gramme armature equally active with the exterior in electric generation; the inventor rejecting the theory of electric generation by the lines of force threading through the coils, and regarding the interior wire, in the ordinary construction, only as a conductor. To bring this comparatively idle wire into action as a generator, the field-magnets of the Sperry dynamo are constructed with interior as well as exterior pole-pieces, the flat ring armature being nearly inclosed between them, by which means, it is claimed, about 92 per cent of the armature wire is rendered effective, while, without interior pole-pieces, only 30 to 54 per cent becomes effective.

Fig. 33 represents the field-magnets complete. They consist of four magnets, the four cores being attached to a heavy iron yoke. From each core two pole-pieces, like the tongues of a tuning-fork, project horizontally, eight in all, four interior and four exterior, the two sets being arranged in two concentric circles as shown, leaving an annular space between them. The arma-

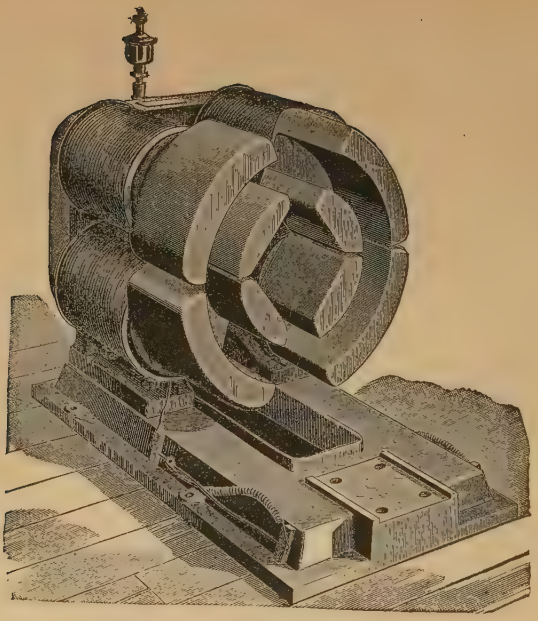

Fig. 33.

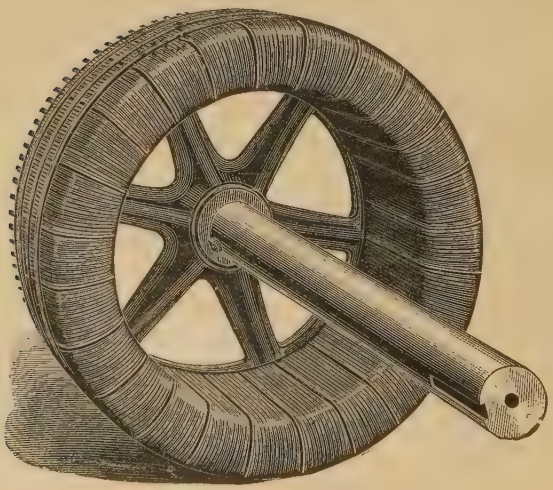

Fig. 34.

ture, shown in Fig. 34, rotates in this space, its position being reversed, and its shaft passing through the center of the magnet yoke. Its core has the same construction as that of others already described— thin flat sheet-iron rings, insulated with paper and bolted together, without air spaces. It is attached at the commutator end to a brass support called the spider, connected with the shaft. It is series wound in one closed circuit, with insulated copper wire of medium size, the coils being connected by radial arms with the commutator in the usual manner; the ring complete being $8\frac{1}{2}$ inches wide in the 35 arc-light machine. The shaft with the armature attached can be moved horizontally by means of a screw, and the armature drawn out of the inclosing pole-pieces, and consequently out of the magnetic field to any required extent, thereby reducing the magnetic and electric intensities.

The dynamo complete is shown in Fig. 35. The brushes, consisting of overlapping flat copper strips, are attached to a movable yoke which has an automatic rotary movement controlled by an electro-magnetic regulator placed in the lamp circuit operating through a mechanical device, not shown in the cut, so that any variation in the electric resistance of this circuit changes the position of the brushes automatically with reference to the magnetic intensity of the field, and thus maintains the electric equilibrium; the brushes, by a rotary movement on the commutator, approaching the neutral points when a lamp is lighted, thereby increasing the electromotive force in proportion to the increase of resistance, and receding from those points when a lamp is extinguished, thereby reducing the electromotive force in

proportion to the reduction of resistance; thus maintaining constancy of current in each case, and hence constancy of illumination in each lamp.

This is a direct current dynamo, series wound; the field-magnets, wound with large wire, being included in the lamp circuit. It is claimed that an increase of forty-five per cent in electric current is obtained by the

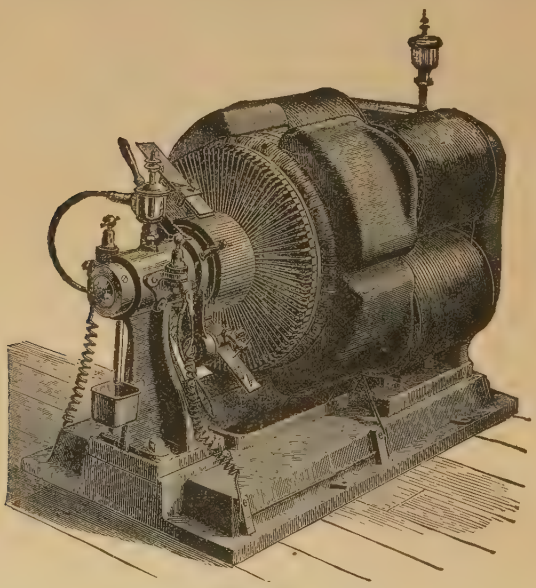

Fig. 35.

use of the interior pole-pieces; a dynamo of twenty arc light power with this construction being reduced to one of eleven arc-light power without it.

It is doubtful, however, whether these claims can be sustained, and whether any advantage is gained by the use of interior pole-pieces, since the magnetic energy is not increased thereby, but only differently distributed; the magnetic energy thus introduced into the interior of

the armature being taken from the exterior, the total amount remaining constant. Hence since the exterior magnetic intensity is thus diminished, electric generation in the exterior wire must be diminished in the same ratio, and if the electric generation by the interior wire does not exceed this decrease, there can be no increase of electric energy by this method of construction. Experiment seems to confirm this view, showing that electric generation is not diminished by the removal of the interior pole-pieces.

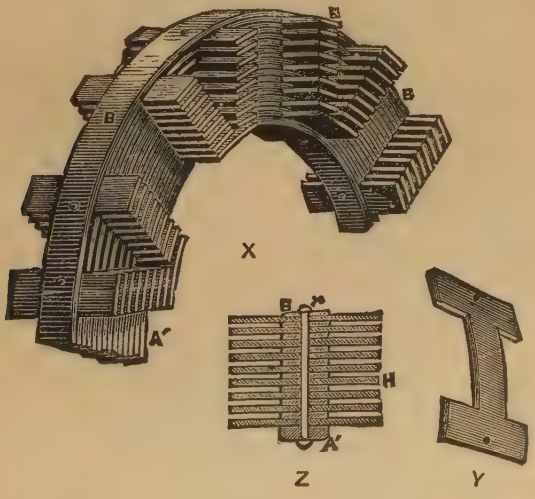

Fig. 36.

It is evident that in a flat ring armature like this, with air circulating on all sides of it, air circulation in the interior of the core is of less consequence than in a drum armature.

The Brush Dynamo.—The distinctive features of the Brush dynamo relate chiefly to the construction of the armature and commutator. The armature core, shown at *X*, Fig. 36, has a central ring, *B*, *B*, *B*, composed of layers of thin sheet-iron ribbon, insulated

by vulcanized fiber. These are separated from each other by short iron pieces, one of which is shown at *Y;* the central part of each having the same width as the ring, while at each end are projections on opposite sides, forming, when placed in the core, the V-shaped figures shown at *X;* the arrangement, when the core is bolted together, being shown in cross-section at *Z.*

Fig. 37.

The ends of these pieces are separated slightly in the interior, and more widely at intervals in the exterior, as shown in Fig. 37. The core is bolted to an interior rim, shown in Fig. 37, which is attached at four opposite points to a spider mounted on the shaft.

This open, laminated structure affords ventilation, eliminates the Foucault currents, and gives, in the

central portion, between the projections, a solid support for the coils. The old-style core, which resembles this, was of cast-iron, deeply channelled for ventilation, in the center and in each projection, but was abandoned on account of the Foucault currents and consequent heating, notwithstanding the excellent ventilation. The new core gives the dynamo an increase of more than forty per cent in efficiency.

The coils are wound with insulated copper wire between the projections, as shown in Fig. 37, and supported on the exterior and interior portions of the core by projecting flanges. The winding is of the open circuit type described on page 18, the coils being arranged in pairs on opposite sides of the armature, each pair forming a complete, independent circuit, the two ends of the wire being attached to opposite segments of the commutator; an eight-coil armature having four circuits and eight commutator segments, as shown in Fig. 38, in which the connections with the commutator are represented, that part of the wire connecting each pair of coils being omitted.

The construction of the commutator and its connection with the coils will be understood by comparing Fig. 38, showing the connection, with Fig. 39, in which it is shown in perspective. It consists of two cylinders, as shown, each having an equal number of segments; an eight-part commutator, being composed of two four-part cylinders mounted on the same shaft, in such a position that the segments on one cylinder are about one-eighth of a circumference in advance of those on the other; the narrow end of each T-shaped segment of one cylinder being placed opposite the broad end of each similar segment of the other. In the latest style

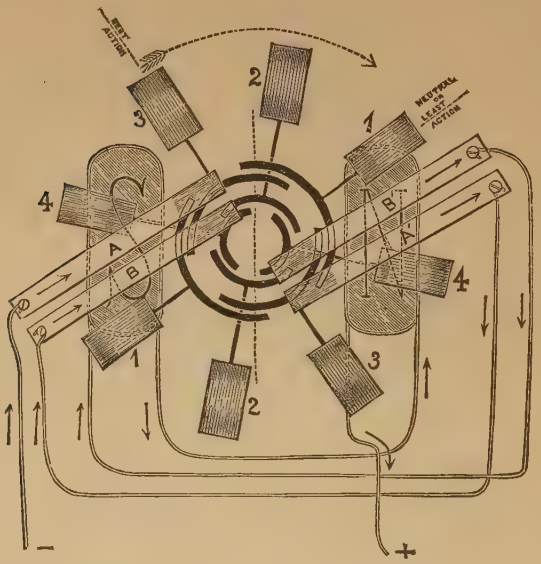

Fig. 38.

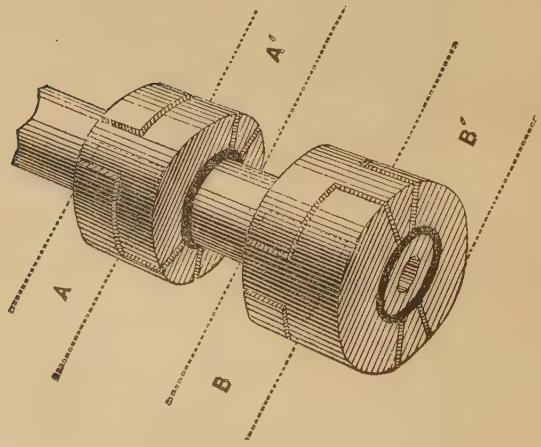

Fig. 39.

the narrow part of the segment is cut off and replaced by a block of lignum vitæ, which has a copper strip on one edge to prevent wear from the brush contacts; so that each four-part cylinder has, at each end, two segments placed as shown, with narrow blocks between. The segments are of copper, separated by air spaces, and screwed to segments of brass mounted on two concentric interior cylinders, one of vulcanized fiber, immediately under the brass segments, and the other, which is attached to the shaft, of lignum vitæ.

It will be seen from Fig. 39 that while the brushes A, A', are each in contact with a single commutator segment, the brushes B, B', are each in contact with two segments; and by comparing this with Fig. 38, it is seen that A, A', are thus connected with coils 3, 3, while B, B', are connected with coils 2, 2, and 4, 4; coils 1, 1, being disconnected. B, B', are therefore connected in parallel with two pairs of coils, but not with two adjacent pairs; coils 3, 3, lying between them. Six of the eight coils are thus brought into action at once, and this represents the relative positions of the various parts constantly during rotation. Coils 3, 3, are in the line of greatest variation of magnetic intensity and consequently of best action, and are joined through the external circuit by the brushes A, A'; coils 4, 4, approaching this position, and coils 2, 2, leaving it are joined in parallel by the brushes B, B'; while coils 1, 1, being in the line of least variation of magnetic intensity, and consequently of least action, are disconnected. The current from the external circuit entering at A and traversing coils 3, 3, leaves at A', thence returns through the external circuit to B, and traverses coils 2, 2, and 4, 4, leaving by the external circuit at B', and thence returns

again to *A*, completing the circuit. It is thus seen that the positive current is from coils 3, 3, where the electric potential is highest, to coils 2, 2, and 4, 4, of lower potential, from their position, and of less resistance from being joined in parallel, and thence negatively back to 3, 3.

It is evident that such an armature may be composed of any even number of coils, arranged as described. The armature of the largest Brush dynamo has sixteen coils. The copper segments of the commutator are attached with screws, and easily removed for repairs or renewal.

Two styles of the Brush dynamo are now made, one for arc lighting, series wound as formerly, and the other compound wound for incandescent lighting. The automatic, rotary movement of the brushes on the commutator, already referred to, has been recently adopted, and is used in both machines. The arc-light machine is shown in Fig. 40. The field-magnets, which are of the horse-shoe type, are placed on opposite sides of the armature as shown. Those of the arc-light dynamo are wound with large wire, and have also an interior fine wire used as a shunt in regulating the lamps. The magnets of the compound wound dynamo have large wire next the pole-pieces, and fine wire next the magnet yokes. It will be noticed that the planes of the armature coils are at right angles to the plane of rotation, and cut the lines of force in a different manner from any of the dynamos thus far described; and that the core projections, coming close to the pole-pieces, lead the magnetism through the coils.

THE THOMSON-HOUSTON DYNAMO. — This dynamo has a very peculiar construction. Its armature, shown

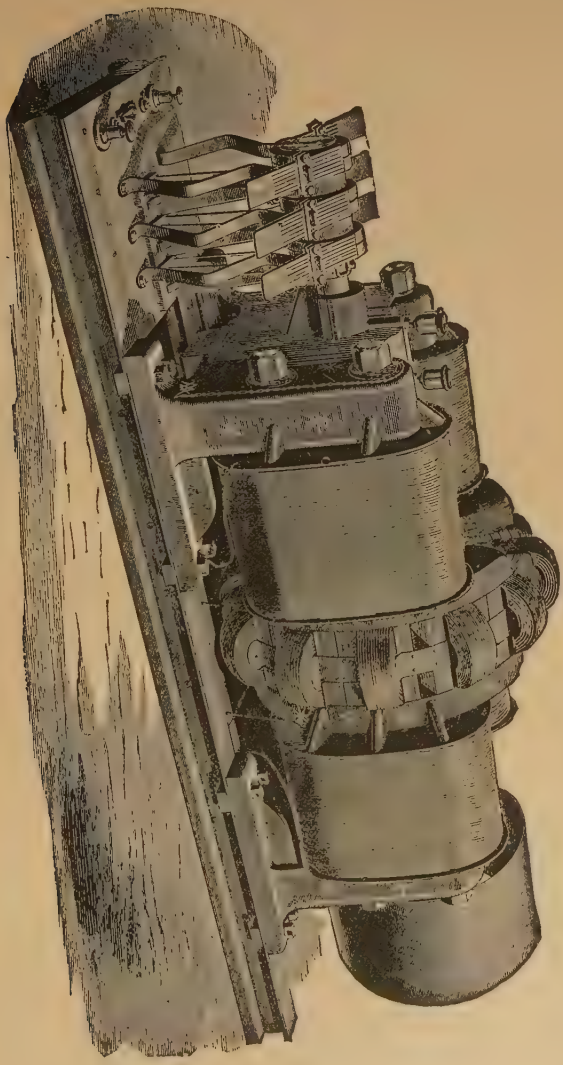

Fig. 40.

in Fig. 41, is nearly spherical. The armature core, shown in Fig. 42, consists of two cast-iron flanges, *G*, *G*, the one on the left shown in elevation, and the one on the right in section. These are attached to the shaft, and connected by twelve cast-iron ribs, *D*, *D*, as shown, sup-

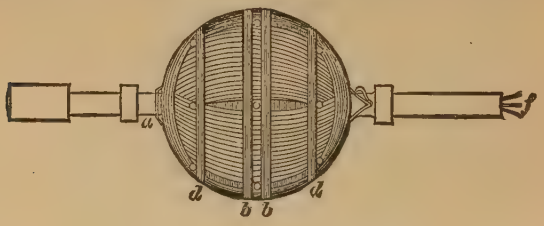

Fig. 41.

ported by the flanges, but insulated from them. These ribs are over-wound with several layers of annealed iron wire, coated with shellac, filling the exterior space between the flanges, as shown at *I*. At the ends and center of each rib are inserted projecting wooden plugs,

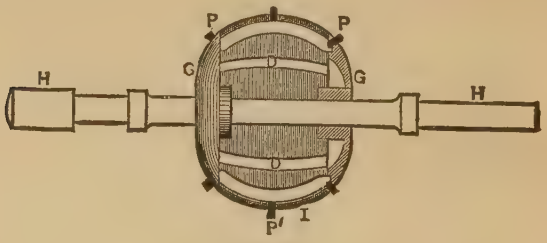

Fig. 42.

shown at *P*, *P*, *P'*, thirty-six in all, designed to sustain the coils in position. The core thus constructed is covered with several thicknesses of paper for insulation. The three coils, composed of insulated copper wire, are joined in one closed circuit by connection with a copper ring at *a*, Fig. 41; and each of the three coils, starting

from this point at distances apart of one hundred and twenty degrees, are wound between the wooden plugs over the core in the direction of its axis, as shown, in the following order: 1. First half of first coil. 2. First half of second coil. 3. Whole of third coil. 4. Second half of second coil. 5. Second half of first coil. In this way each coil is placed at the same average distance from the core. When the winding is completed, the free ends of the three coils, shown

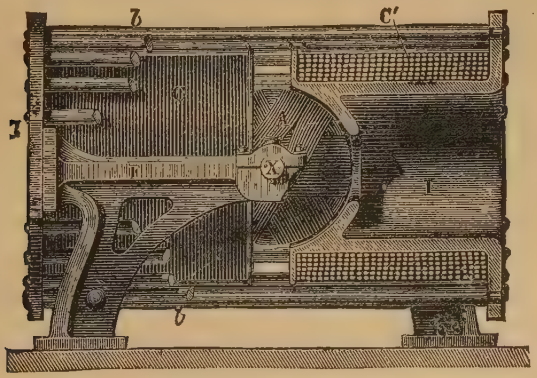

Fig. 43.

at *f*, are led through an opening in the shaft, and attached to the three segments of the commutator, and the armature is bound together in the usual manner by bands of brass wire shown at *b b*, *d d*.

The field-magnets, shown in Fig. 43, are constructed with two tubular cast-iron cores, open at the outer extremities, and terminating in broad flanges; while the inner extremities terminate in spherically concave pole-pieces, which nearly inclose the armature, and are furnished with brass flanges, between which and the

outer flanges the magnet coils are wound, as shown at C and C'. These two cores are bolted together by bars of soft wrought-iron, b, b, connecting the outer flanges, forming virtually, when wound, one magnet, its poles facing each other in the center where the armature revolves. The pole-pieces being inclosed within the magnet coils, and the armature brought into immediate contiguity with them, there is an increase of magnetic intensity upon the armature, which is inversely proportional to this reduction of distance, and consequently much greater than if the pole-pieces projected in the usual manner. The pole-pieces, being spherically concave, concentrate the magnetism of the field upon the spherical armature by radiation towards its center. In the latest machines the mass of iron in the magnet cores is increased by the addition of iron ribs, not shown in the cut, radiating from the interior rim of each pole-piece to the tubular portion of the core. The magnets of the arc-light machines are series wound with No. 12 insulated copper wire; those of the incandescent-light machines are compound wound, the fine wire of the shunt covering the tubular part of each core, while the coarse wire is wound in a peculiar manner close to the pole-pieces, and separated from the fine wire by the projecting flanges: hence both circuits excite the field-magnets, and, being joined at the brushes, their currents traverse the armature coils.

There are two pairs of brushes which bear on the commutator in the manner shown in Fig. 44: these, as shown in the perspective view of the dynamo, Fig. 45, are attached to a yoke, and controlled by a magneto-electric regulator placed in the circuit, and mounted on the supporting frame of the dynamo, as shown at the

left. By the operation of this regulator the brushes of each pair are drawn together or separated, as shown in Fig. 44, and the current increased or diminished as required, by increase or decrease of the electromotive force produced in this manner. The rotation being in the direction of the external arrows, $m\,m'$ represents the neutral line, and the internal arrows, the direction of the current; consequently when the brushes occupy positions near this line, as at $P\,F$, and $P'\,F'$, the electromotive force is greater than when they recede from it to the positions p, f, and p', f'. In the first position the brushes of each pair being 60 degrees apart, and the length of each commutator segment being a little less than 120 degrees, the two brushes of one pair always bear on one segment, while each brush of the opposite pair bears on a separate segment; so that two coils are always in parallel, and are in series with the third coil, as shown. The electromotive force, under these conditions, must always be greater than when the brushes occupy the second position, the brushes being nearer the neutral line, and the time of contact with each segment in this best position being thus prolonged. But when they recede to the second position, they are farther removed from the neutral line, the time of best action is reduced, and, six times in each rotation, two opposite brushes momentarily touch the same segment, and are thus short-circuited. Hence,



Fig. 44.

under these conditions, the electromotive force is reduced in proportion to the distance apart to which each pair of brushes is separated. When from a reduction of resistance in the lamp circuit by the extinguishing of a lamp, or otherwise, the current feeding the remaining lamps becomes liable to an abnormal increase, this increase is shunted through a very sensitive electromagnet, termed the controller magnet, connected with the regulator magnet of the dynamo, already referred to: the armature of the regulator is attracted, the lever connecting with the brushes is raised, the brushes separated, and the current reduced. When, from an increase of resistance in the lamp circuit, the current is diminished, this operation is reversed; the brushes drawn closer together, and the current increased; the brushes being so adjusted that one commutator segment is out of connection during each revolution. By this method constancy of current under varying resistance is maintained, the electromotive force being made to vary as the resistance. This system of automatic regulation, variously modified, is practically the same as that in use in other dynamos already described.

One striking peculiarity of this dynamo is the air-blast spark-controller, — a mechanical contrivance by which air is blown against the brushes at their points of contact with the commutator, by which means sparking at these points is suppressed. The box in which the blast is generated is shown in Fig. 45 just back of the commutator, and one of the jets just above it.

Sparking at the brushes, due to irregularity in the operation of the machine, is the result directly of the passage of electricity through the air, as the brushes change from segment to segment of the commutator

during its rotation, and some part of a brush is for an instant out of electric connection, all dynamos being more or less subject to it. The heat developed at the commutator by friction and electric action rarefies the air, and hence reduces its resistance, and increases the liability to sparking. Hence, a constant, strong current of cool air, such as is supplied by this air blast, increases the resistance, and, as the result shows, renders it too great for the passage of the spark. The current theory that

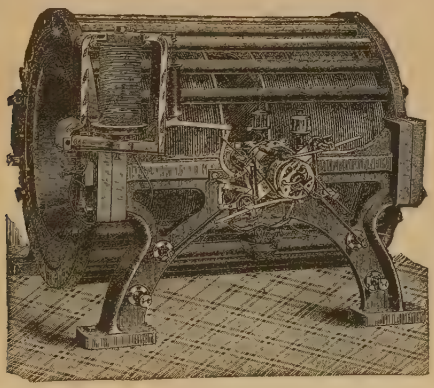

Fig. 45.

the spark may be "blown out," in the same sense as a light is extinguished in ordinary combustion, is not strictly accurate. In ordinary combustion the blast removes the burning gas and combustion ceases, but, in this case, it removes air of low resistance and replaces it by air of high resistance, and also keeps the brushes and commutator cool, and hence the air surrounding them. The arc-light may also be extinguished by a blast of air, and is more nearly a parallel case. But, in the arc, the

electric current is maintained after the separation of the carbons by the conductivity of the burning carbon vapor, and the blast extinguishes it by removing this vapor and thus increasing the electric resistance, so that the current cannot traverse the intervening air space; whereas, in sparking at the brushes, there is no combustion or burning vapor, but simply air heated to incandescence.

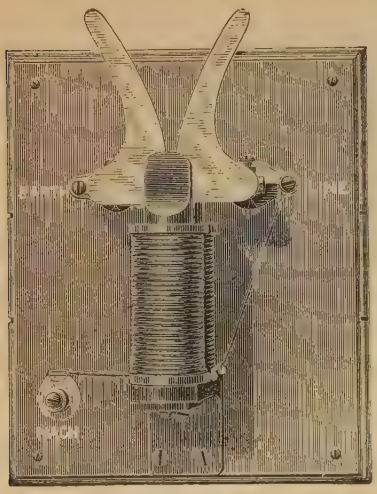

Fig. 46.

With the air blast, oil can be freely used to reduce the wear on the brushes without affecting the insulation.

The lightning arrester, used to protect the dynamo against damage by lightning, is also an important adjunct. It is shown in Fig. 46, and is constructed with an electro-magnet, through the coils of which the current between the lamp circuit and dynamo passes. The two magnet cores project vertically above the coils, as shown; and between them are placed, edge to edge, two projecting wings of brass, their broad bases about one-fourth of an inch apart, and their narrow upper parts receding from each other, as shown. The instrument is mounted on a wooden base, screwed to the wall; and the wings are out of contact with the magnet cores, each one screwed to a brass lug, one of which is con-

nected with a line leading to the lamp circuit, and the other with a No. 4 copper wire leading to the earth, as indicated. The line from the dynamo circulates round the magnets, and is also connected to the upper right-hand lug. The lamp circuit line has thus two branches from this lug, one through the magnet to the dynamo, and the other through the brass wings to the earth; the latter interrupted by the narrow, quarter-inch air space at the base of the wings. This air space is sufficient to insulate the left wing from the dynamo current; but if a discharge of lightning occurs on the line, its great intensity causes it to leap the air space, and take the shortest course to the earth; the projecting edges of the wings facilitating the discharge, though not sharp enough to short-circuit the dynamo current. Part of the discharge must go to the dynamo, dividing between the two branches in proportion to the relative resistance of each; but the distribution of this portion in the mass of the machine prevents injurious results.

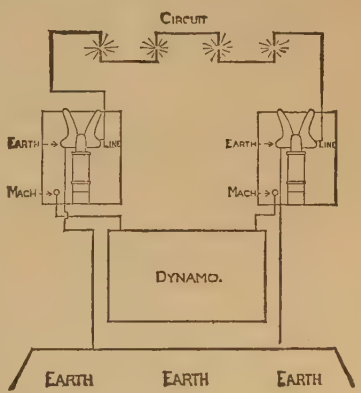

Fig. 47.

The object of the projecting magnetic poles, between which the wings are placed, is to extinguish the spark during the passage of the discharge from wing to wing, by establishing a magnetic current at right angles to the line of discharge.

Fig. 47 shows the relative positions and connections

of the various parts of the system; two arresters, one in each branch of the circuit, being recommended as shown.

Various kinds of arresters are used in connection with different systems of electric lighting, in some of which combs with projecting teeth take the place of the wings, in others a soft metal connection is melted; while in others a mechanical device, operated electrically, severs connection with the machine. These arresters are also applicable to telegraph and telephone systems, and are applied in a similar manner.

THE WESTERN ELECTRIC DYNAMO. — This dynamo, made by the Western Electric Company, is noticeable chiefly for the structure of its armature, in which insulation, ventilation, and method of winding, are the prominent points. It is of the drum type: the core is supported on the shaft by an open framework of brass, which consists of three spiders, one at each end, and one at the center; to which are attached three lug rings, each having thirty-two projecting wedge-shaped lugs, between which the coils are wound. To these rings four longitudinal bars are attached on the inside, one between each two arms of the spider, and insulated from the rings by asbestos. On these bars, but insulated from them by asbestos, are mounted thin sheet-iron rings of the pattern already described. These are grouped together in sets of twenty, each set being insulated from the adjoining set by strips of asbestos coated with shellac, leaving open spaces for air circulation. Bands of canvas three-eighths of an inch wide, placed half an inch apart, insulate the core from the coils, leaving air spaces between them; and at each end are thick rings of asbestos.

The coils are wound longitudinally with No. 13 insulated copper wire, in one closed circuit, after the Gramme type, between the lugs, but insulated from them. Each coil, when wound, stretching along one side of the core lengthways, fills each of the three spaces between three pairs of lugs in line; then, passing over the end, it divides into two equal parts, and the two halves return on the opposite side through two rows of lug spaces, with an empty row between. This empty row is then filled by another coil in the same manner as the first row; and the two halves, passing over the end as before, return on each side of the first full row. The two coils thus fill three rows of spaces on opposite sides of the core, a full row being between two half filled rows. Two more coils are then wound in a similar manner at right angles to the first two, and when half the wire is thus wound, the winding is completed with the other half; each half filled space receiving another half, and each empty space being filled. The sixteen coils, being then properly connected in one closed circuit, are attached to the sixteen segments of the commutator. By this method of winding, a half coil section always precedes a full coil section, and another half follows it as the armature rotates in the magnetic field; so that the magnetic effect on the coils rises and falls gradually, and sudden fluctuations of current, and consequent sparking at the brushes is reduced.

The interior of the armature, being hollow, communicates with the external air by passages through and around the core, and between the coils, as described, giving thorough interior ventilation, and reducing the heat accumulation to its minimum.

The commutator segments, made of bronze, and separated by air spaces, are screwed to interior segments of brass, mounted on an insulating cylinder of hard maple, inclosing a brass cylinder attached to the shaft. The automatic rotary movement of the brushes on the commutator, by which the current strength is varied, is also adopted in this machine.

Two field-magnets of the horse-shoe pattern, placed horizontally, form the magnetic field; their opposite poles, facing each other, are joined together by two central pole-pieces, each cast in one piece with the two connecting cores, forming consequent poles, inclosing a circular space in which the armature revolves; the sectional area of the magnet cores practically equaling that of the armature core, so as to insure magnetic saturation. No. 5½ to 6 insulated copper wire is used to wind the magnets; the layers being separated in three places by the insertion of wooden slips for ventilation.

This dynamo has also a lightning arrester, which consists of three rectangular binding posts, mounted on the center of the pole-pieces, on a hard rubber base, the middle one insulated from the two outer ones by eighth-inch air spaces. The outer posts connect the field-magnet coils with the line, while the central post is connected with the earth. Lightning on the line, to or from the earth, crosses the narrow air spaces, and the dynamo escapes harm; while the ordinary current is insulated from the earth connection by the air spaces.

THE BALL DYNAMO. — This dynamo, on account of its peculiar construction, is designated as unipolar. This construction will be readily understood from Fig. 48.

A wrought-iron frame consisting of two end plates connected by four cylindric bars supports the machine. The bars constitute the cores of the field-magnets, are yoked together by the end plates, and wound with No. 14 wire.

The armature consists of two Pacinotti-Gramme rings, constructed in the usual manner, and wound with No. 13 wire; these are mounted on a shaft supported at the ends and center, and terminating in two band

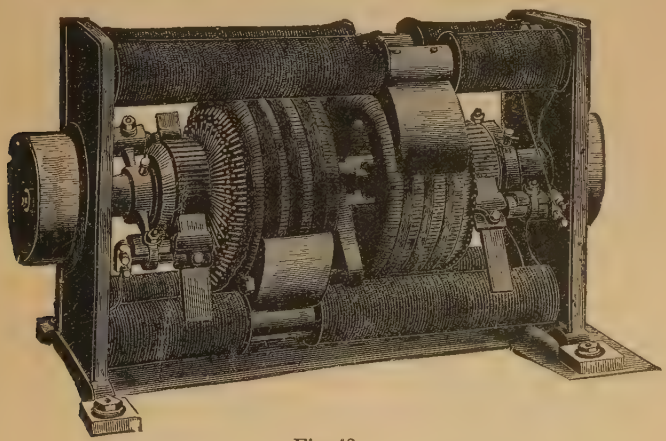

Fig. 48.

wheels, either of which may be used, according to convenience. The two armature rings are magnetically insulated from each other at the center by a brass connection in the shaft, and each is furnished with a separate commutator, placed near the opposite ends of the shaft. In proximity with each armature ring is placed a single wrought-iron pole-piece, — one below at the left, and the other above at the right as shown. Two brushes press lightly on each commutator, the

current entering by one pair, and leaving by the other pair.

The leading advantages claimed for this construction are: First, that by the distribution of the armature coils over two rings instead of one, their reduced thickness brings the cores closer to the pole-pieces, the mass of wire in the coils closer to the cores, and thus increases the reciprocal magnetic and electric action, while reducing the liability to magnetic saturation of the cores, thus securing the full magnetic effect with less molecular strain on the cores, and consequently less heating; secondly, the openness of structure resulting from single pole-pieces and reduced thickness of the coils increases the ventilation, and reduces the heat accumulation. The minor advantages are high efficiency in proportion to amount of material, and cost of construction; facility in setting up, and taking down the machine, or removing the various parts for repair or renewal; and freedom from complicated mechanism.

The lightning arrester is also an adjunct, and the automatic movement of the brushes on the commutator can be applied, but is not recommended. By making the pressure of the brushes light, sparking is said to be reduced as well as wear of the brushes and commutator.

THE MATHER DYNAMO. — This dynamo, designed exclusively for incandescent lighting, and illustrated by Fig. 49, is distinguished chiefly by the peculiar form of its field-magnet. The core and pole-pieces are one single casting, in almost the exact form of a horse-shoe, as shown in Fig. 50, all joints being thus eliminated, and perfect magnetic continuity secured. It is wound in two circuits; a shunt of medium size wire lying

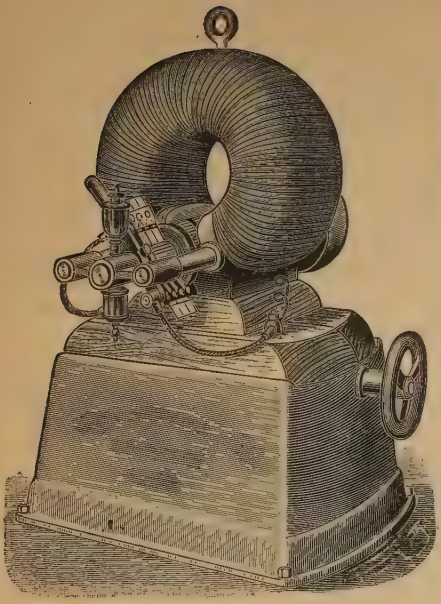

Fig. 49.

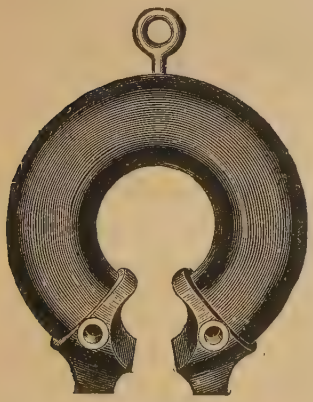

Fig. 50.

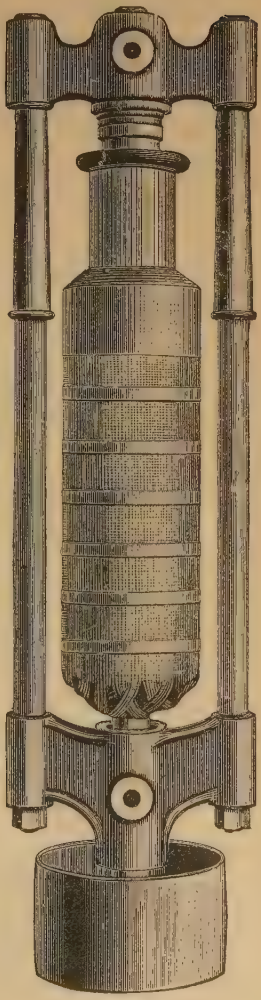

Fig. 51.

next the core, and the main circuit of heavier wire on the outside. Two cylindric wrought-iron bars extend through the two pole-pieces, and are connected at each end by brass yokes which support the armature, and insulate it magnetically from the field-magnets, as shown in Figs. 49 and 51.

The armature shown in Fig. 51 is of the drum type, and without interior ventilation. The core is composed of sheet-iron rings, on which the coils are wound longitudinally in one closed circuit, and connected to the commutator by radial arms in the usual manner.

The two circuits of the field-magnets are connected with two binding posts, one of which is seen in Fig. 49 at the upper right-hand corner of the base; the other on the left, being hid behind the drip cup, these posts being connected with the brush holders as shown. The main circuit connects with the binding posts beneath the base, and one end of the shunt connects with the right-hand post as shown; the other end, on the left, being connected with a rheostat attached to the wall, and containing a number of resistance coils; and from this a wire leads to the left post, so that the rheostat is thus placed in the shunt circuit, the lamps being in the main circuit. By the movement of a switch in the rheostat, a greater or less number of resistance coils may be included in the shunt, and the resistance varied to any desired extent; the strength of current in the lamp circuit, varying inversely as the resistance in the shunt, may thus be increased or diminished as required for a greater or less number of lamps; and both circuits being connected with the brushes, it is evident that the current from both circulates through the armature.

The machine is mounted on an elevated cast-iron

base, from which it is insulated by a wooden base, which slides between flanges, and is moved by the adjusting screw, shown at the right, to regulate the tension of the belt.

THE VAN DEPOELE DYNAMO. — The general construction of this dynamo is shown in Fig. 52. The cores of the field-magnets, made of wrought-iron, are

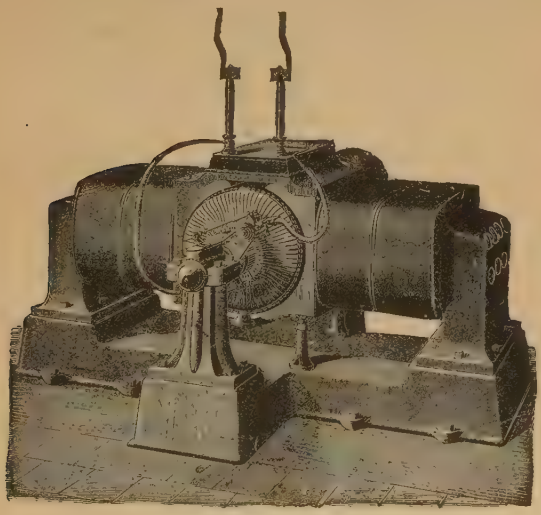

Fig. 52.

bolted to the cast-iron base, thus forming a single magnet with inverted poles facing the center, and terminating in the pole-pieces which are supported on the base, and between which the armature is placed, as shown. A wooden plate, resting on the magnets above, serves as a support for the binding posts, which connect with the outer circuits.

The armature is of the Pacinnotti-Gramme type. Its

core is composed of layers of soft iron wire, coated with zinc, and thus magnetically insulated from each other, forming a helix supported on longitudinal bars, and divided into sections, separated by wooden strips, for ventilation.

The special distinguishing feature of this dynamo, according to the latest construction, is the differential winding of its field-magnets, and their connection with an external current regulator, by which the strength of current is increased or diminished automatically, as required by the varying resistance of the external circuit.

In Fig. 53 the dynamo is shown in section, and the regulator and lamp circuit above it. $A\,A^1$ is the core, $M\,M^1$ the helix connected with the main circuit, and $D\,D^1$ the helix of finer wire connected with the differential or shunt circuit; the two circuits being wholly insulated from each other, and so connected that a current passing through the differential or shunt circuit opposes the current in the main circuit. The current entering from the lamp circuit at P traverses the left exterior helix, enters the armature by the upper brush at B, leaves by the lower brush at C, enters the right exterior helix at C^1, leaves it at D^2, and passes from the binding post N to the electro-magnet M^2, and, circulating through its coils, leaves at F, passes through the lamp circuit $G\,H^1$, and returns by the wire I to P.

The current in the shunt circuit enters from P at A^2, traverses the left helix, leaves at b, and passes by the wire b^1 to c; traverses the right helix, leaves at d, enters the regulator at P^1, leaves at N^1, and returns to N.

Now, since the current in the main circuit leaves at N, and the current in the shunt enters at N, it is

evident that these two currents are in opposition: but, in the normal condition of the lamps, the shunt is out of connection, and no current passes through it; but, when one or more lamps are extinguished, the strength

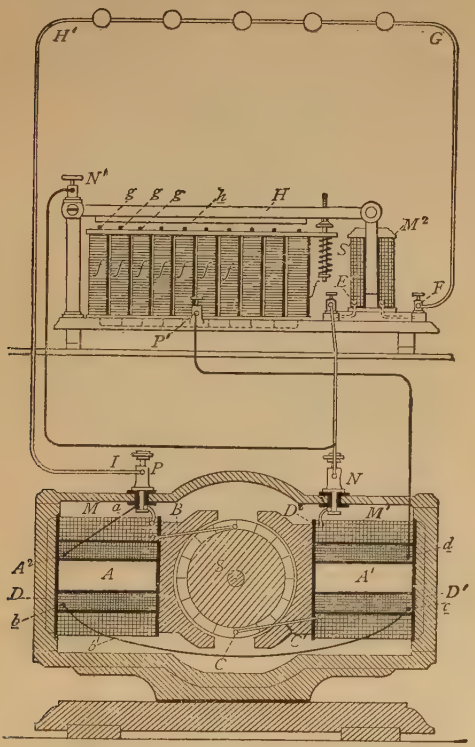

Fig. 53.

of current in the main circuit is increased by the reduced resistance, the armature of the magnet M^2 attracted, the copper bar H drawn down in opposition to the spring S^1, and contacts made with the resistance coils f, f, at the points g, g, through the platinum strip h,

and the opposing current flows through the shunt, as described. This current flowing in a fine wire circuit, and being regulated by the number of resistance coils which it traverses, its strength is just sufficient to reduce that of the main circuit to its normal amount.

The contact points g, g, being of different heights, the flexible platinum strip is brought into contact with

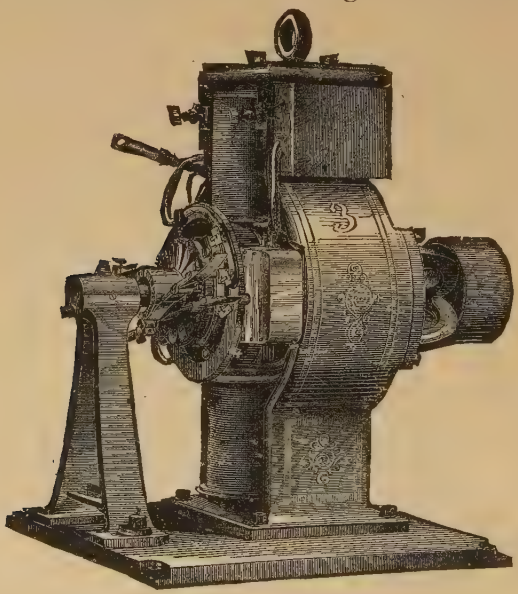

Fig. 54.

a greater or less number of them, in proportion to the increase or decrease of current strength in the main circuit, and this difference of contact is regulated by the spring S^1, whose force can be adjusted, as required, by the set screw shown in the cut.

THE HOCHHAUSEN DYNAMO. — The general construction of this dynamo will be readily understood

from Fig. 54. Its special distinguishing features are found in the construction of its armature and commu-

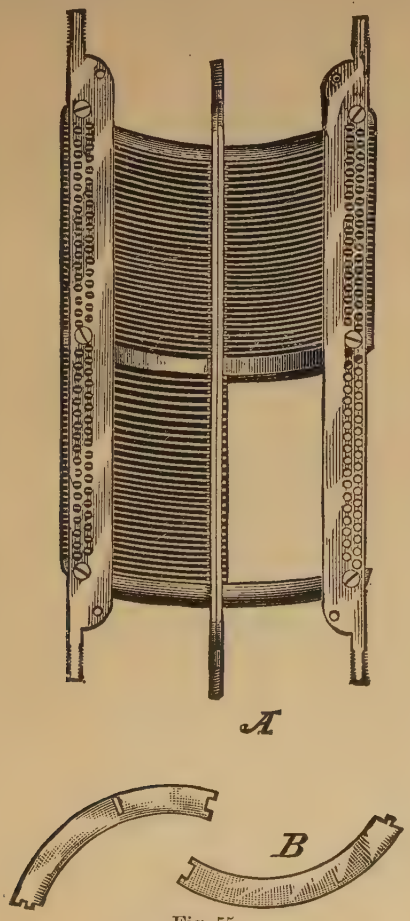

Fig. 55.

tator, and in its automatic current regulation and short-circuiting switch.

The armature core, shown in section at *A*, Fig. 55, is

composed of iron ribs, two of which are shown at *B*. These are about $\frac{3}{32}$ of an inch thick, and have projections at the ends which fit into holes in the longitudinal bars of the frame, as shown.

There are four longitudinal sections constructed in this manner, forming, when joined, a hollow cylinder; each longitudinal bar being in two parts, held together by nuts and screws at the ends, and by iron staples between the ribs, so that any section can be removed without disturbing the others. The ribs are separated for ventilation, as shown, and the staples between them give a firm bearing for the end screws. The core is without magnetic or electric insulation.

The coils, which are shown in Fig. 56 singly at *C*, and in combination at *D*, are wound separately on a mandrel, and each one firmly bound together; and they are subsequently slipped on the separate sections of the core, and properly connected, so that any coil can easily be removed and replaced when repairs are required.

In the commutator, shown in Fig. 57, the segments are attached to a thick disc of slate which is mounted on the shaft; each segment having an arm for attachment as shown, so that they project into the air, and are insulated from each other and from the shaft, both by the air and the slate. Four brushes make contact with the commutator, two on each side; the brushes of each pair being placed side by side, one a little in advance of the other, so that one brush is always in contact while the other is crossing from one segment to the other.

The apparatus for current regulation is shown in Fig. 58, which is a front sectional view of the dynamo.

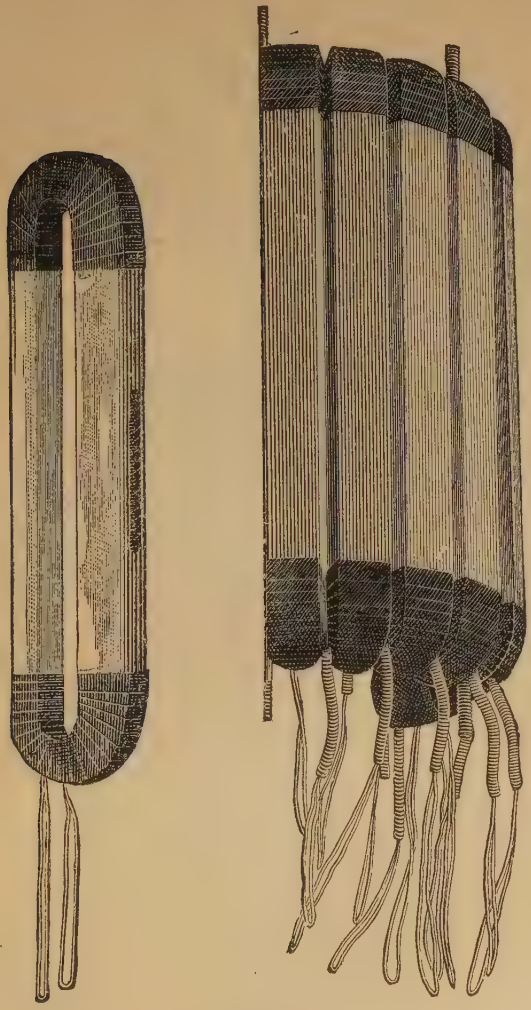

Fig. 56.

At the right is shown a small motor, to which is attached gearing connected with the movable circle which carries the brushes, so that any movement of the motor, direct or reverse, changes the position of the brushes on the commutator, and varies the magnetic intensity.

The armature of the motor rotates between two pole-pieces, connected with the pole-pieces *C*, *C*, of the field-magnets by the brackets *h*, *h*.

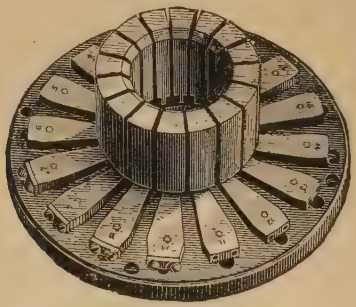

Fig. 57.

At *W* is shown a series of wires, each of which connects with a separate coil of the field-magnet *B*, and these are joined at their lower extremities to a series of insulated contacts 26. Another series of wires, W^2, connected with a series of similarly placed coils of the field-magnet B^3, is joined to the interior set of insulated contacts 25. Contacts 25 and 26 being insulated from each other, no electric current can pass between *B* and B^3 till electric connection is made between 25 and 26: this is done by two copper brushes attached to the little plate, fixed on the outer end of the movable arm, 27, which is attached to the motor, and moved by it. There are thirteen wires in the series *W*, though the

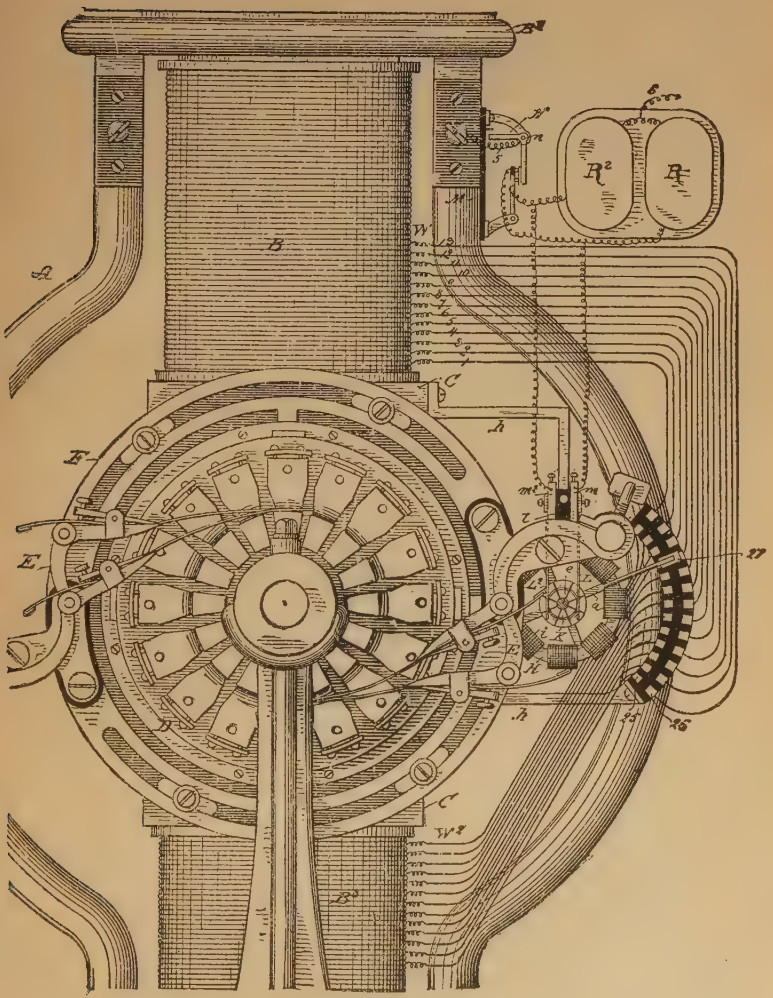

Fig. 58.

number is not limited; and when 27 closes contact in wire 1, all the coils of B are in circuit with all those of B^3, and the magnetism of the field is at the maximum; but when the motor moves 27 downwards so as to close the contact in any other wire, say No. 4, as shown in the cut, the coils at the lower end of B and the upper end of B^3 are cut out of the circuit, and the field magnetism proportionally reduced. The brushes are, at the same time, rotated on the commutator by the gearing, and made to recede from the neutral line, so that the volume of electric current is reduced from both causes.

The apparatus for operating the motor is shown above the wires W, and differs considerably from the apparatus in actual use, while preserving its essential features. The wires connected with the motor brushes at m, m^2, connect above with branch wires leading to two equal carbon resistances, R, R^2, at the right, and at the left with two contact points placed one above the other on the vertical arm of a compound lever; and R, R^2, are connected together by a wire, as shown. The two separate parts of the compound lever are hinged on separate brackets, as shown; and the upper part, which acts as an armature, is hinged at its angle, n, and has a vertical arm and also a horizontal arm, N. Connected with the inner end of the arm N is a spiral spring, not shown, by which it is drawn down in opposition to the magnetic attraction of the upper plate B^2 of magnet B.

When the electric current is at its normal strength, the magnetic attraction, acting against the spring, is just sufficient to keep the vertical arm of the armature in contact with both contact points; the lower arm being composed of two bars insulated from each other,

and a contact point attached to each. The motor, with its connections, is placed in the electric circuit, the terminals of which are shown at 5 and 6. Hence, when the current is at its normal strength, and both points of the lever are in contact, the current from 5 divides at the contact points, and currents flow through the two branches, one through R, and the other through R^2 to 6; and both being of equal strength, and encountering equal resistances, there is no current through the motor. But if from a reduction of resistance in the lamp circuit there occurs an increase of current strength in the field-magnet coils, and consequently of magnetic attraction, the armature N is attracted upwards by B^2, the vertical arm connected with it moved inwards at its lower extremity, the upper contact opened while the lower one remains closed; hence, the current from 5 flows through the lower contact, and divides, one part flowing through R to 6, while the other part flows to M, motor brush L, through the motor to brush L^2, thence by m^2 and resistance R^2 to 6; the armature of the motor rotates, moving the circuit closer 27, which is attached to it, downwards, and cutting out a sufficient number of coils to reduce the current to its normal strength. This reduction is aided by the movement of the dynamo brushes, which are, at the same time, made to recede from the neutral line, as already explained.

If, from an increase of resistance in the lamp circuit, the current strength is abnormally decreased, the magnetic attraction on the armature becomes reduced, and the armature drawn down by the retractile force of the spring; this opens the lower contact, the upper one remaining closed, and reverses the motor current; the

current from 5 flowing through the upper contact, dividing as before, one part flowing through R^2 to 6, and the other part through m^2, motor brush L^2, through the motor to brush L, thence by m and resistance R to 6. The action of the motor is consequently reversed, the circuit closer 27 moved upwards, and the current strength increased to its normal amount by this action, aided by the approach of the dynamo brushes to the neutral line.

The strength of the current flowing through the motor depends on the resistances, R, R^2, and varies in the same ratio, and hence can be increased or diminished to any required extent. These resistances should be equal, so that the strength of the current passing through the motor in either direction may be the same. In the improved current regulator, carbon rods are used instead of carbon plates, and the lever vibrates between the contact points; being out of contact when current on the motor is not required. The apparatus is inclosed in two neat cases attached to the right side of the dynamo, as shown in Fig. 54.

The short-circuiting switch is an apparatus for throwing the current off or on the lamp circuit as required, and will be readily understood from Fig. 59. Its special object is to prevent injurious effects from the extra current on opening the circuit. This current, which flows through the circuit at the moment the connection is broken, has, as is well known, exceptionally great energy, and is often the cause of accidents to the dynamo or attendants. The cut shows a dynamo and lamp circuit with contacts L and K, a forked switch S, and a short circuit by which the current can be diverted from the lamp circuit. When both arms of the switch

rest on contact K, the full current flows through the lamp circuit; but when both rest on L, the lamp circuit

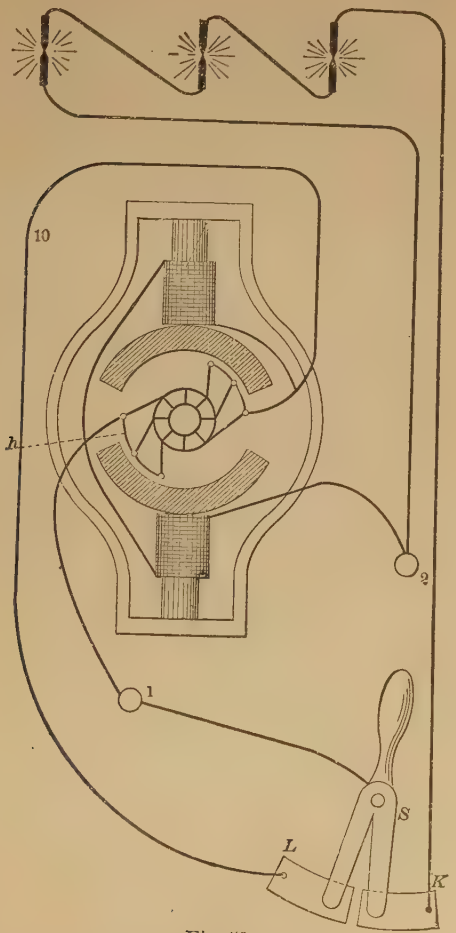

Fig. 59.

is cut out, and the dynamo short-circuited through wire 10. But when an arm rests on each contact, as shown,

the current is divided between the two circuits, contact

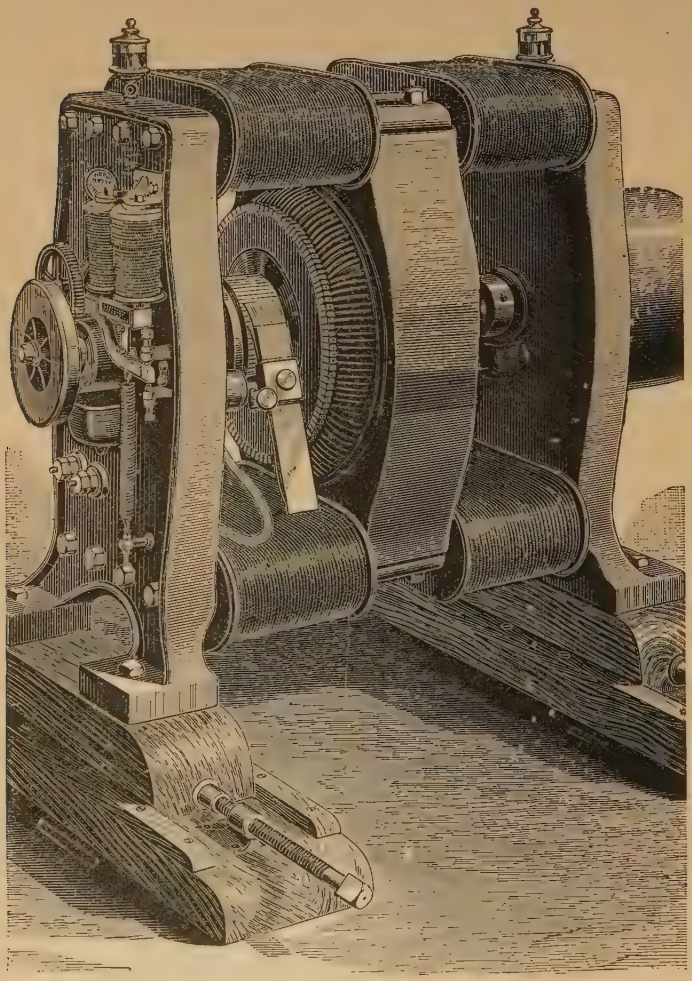

Fig. 60.

being made with the short circuit before it is broken with the lamp circuit; the switch can then be moved so

that both arms shall rest on contact L, and the lamp circuit be cut out without danger from an excess of current.

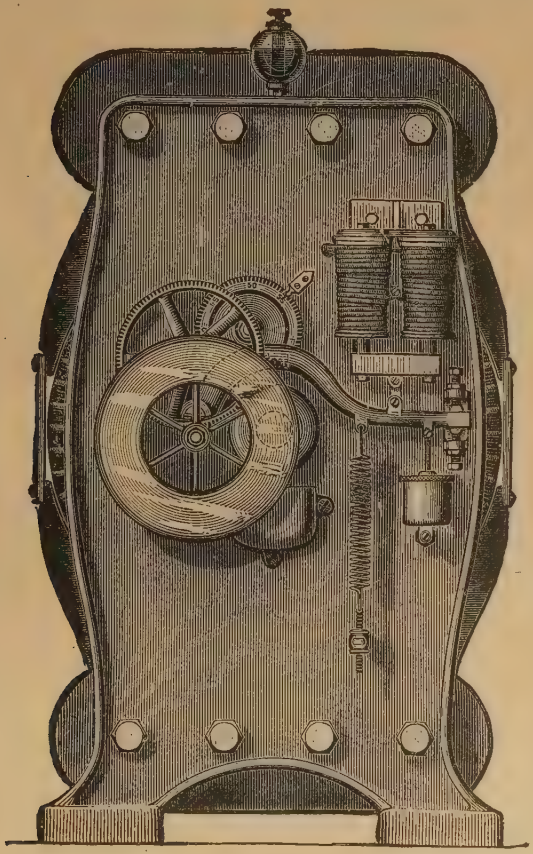

Fig. 61.

THE WOOD DYNAMO. — This dynamo will be readily understood from Fig. 60, without any detailed description. It is of the Gramme type, embracing the recent

features of ventilation of the armature, and automatic current regulation, but presenting nothing in its construction which has not already been fully described, except the current regulator. This is illustrated by Figs. 61 and 62. Fig. 61 is an end view of the dynamo, showing the apparatus in full; and Fig. 62 a side view of the same end, showing the connection with the brushes; the automatic shifting of the brushes on the commutator to vary the electromotive force being the object to be accomplished. The large friction wheel shown in Fig. 61 has a broad rim with a deep groove on its inner surface next the dynamo. The end of the armature shaft fits loosely into this groove, as shown by the dotted circle on its right side, but is out of contact with the wheel in the normal state of the current. This friction wheel is connected at its centre with the short arm of the curved lever shown in the cut. Above the lever on the right is shown an electro-magnet, connected with the lamp circuit, the armature of which is attached to the long arm of the lever; and below it is a spiral spring which acts against the magnetic attraction. Two stops at the extremity of the long arm limit its movement; and a dash-pot, which consists of a piston moving in a cylinder against air, or other resistance, steadies the movement, and makes it gradual instead of impulsive. A pinion on the hub of the friction wheel engages gearing connected with the yoke to which the brushes are attached, as shown in Fig. 62. The magnetic attraction acting against the retractile force of the spring is just sufficient, in the normal state of the current, to hold the lever in such a position as to keep the friction wheel out of contact with the revolving armature shaft. An

abnormal increase of current strength increases the magnetic force, which attracts the armature, and raises the lever,

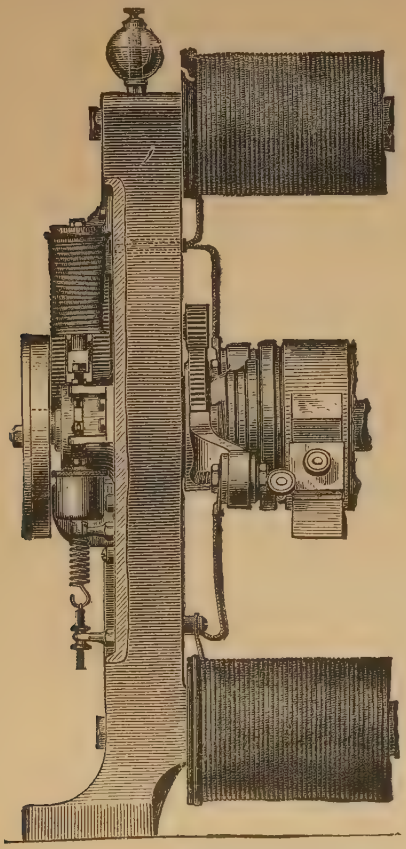

Fig. 62.

which presses the friction wheel against the revolving shaft on one side of the groove, and by means of the gearing causes the brushes to recede from the neutral

line. An abnormal decrease of current lessens the magnetic attraction, the lever is drawn down by the spring, the friction wheel pressed against the opposite side of the groove, the motion reversed, and the brushes made to approach the neutral line.

CHAPTER V.

Electric Terms and Units.

Before entering upon an investigation of the principles which govern the construction of electric lamps, it is proper to define more fully various technical terms in common use in electric science, most of which have been frequently used in the preceding chapters, accompanied, as introduced, by brief definitions. This is the more important since their full import is not always clear, even to many who daily use them.

Electric Potential. — Potential is a convenient term used in various departments of physical science to represent the energy which a body may possess to accomplish work. A weight has gravity potential when it occupies such a position that it can accomplish work by its descent, a furnace, heat potential when it can accomplish work by its heat. So practically, without reference to mere theoretical distinctions, electric potential is the power which a body possesses to accomplish work by virtue of its electricity. But to accomplish work by gravity, heat, electricity, or other energy, there must always be a difference of potential, since in equality of potential the forces are equally balanced: a weight requires difference of level, heat, difference of temperature. So electricity can accomplish no work where the opposing electric conditions are equal; and the object of any electric generator,

whether it be a battery, dynamo, or static machine, is not to create electric energy, — which is a physical impossibility, since, like gravity, it exists as a universal property of matter, — but to create a difference of electric potential.

Positive and negative are convenient relative terms to express differences of potential. A body is said to be positively electrified when by electric accumulation its potential rises above that of other bodies to which it may be related, either by contiguity of position or electric connection; and negatively when its electric potential is below that of the other bodies.

ELECTRO-MOTIVE FORCE. — Electro-motive force is the force or pressure which electric energy is capable of exerting by virtue of a difference of electric potential between the body in which it is accumulated and some other body. The force or pressure is exerted by the energy itself, the body in which it is accumulated or by which it is transmitted being merely a passive medium, and not, as in the case of steam and some other bodies, the active medium by which the energy is applied.

The term *pressure* has recently come into use in this connection, and perhaps expresses more clearly what takes place than any other term which can be found. It is the energy accumulated in steam, heated air, a descending weight, or a waterfall, which creates the pressure by which work is accomplished; and similarly, by its own peculiar process, electricity creates pressure, and accomplishes work.

The symbol for electro-motive force is E. M. F., and in mathematical formulæ E alone is generally used.

RESISTANCE. — Resistance is that which opposes electro-motive force; it may consist in counter electro-motive

force, in useful work to be accomplished, in the imperfect conductivity of the conductor, or in an artificial obstruction placed in the circuit for a given purpose. It is important to distinguish carefully between internal resistance, which pertains to the generator or any electric instrument, and external resistance, which pertains to the general circuit. R is the symbol of resistance; and where both kinds are referred to in the same connection, r is used to indicate the internal, and R the external, resistance.

CURRENT. — Current is that electric condition in a conductor which results from electro-motive force modified by resistance. It pertains exclusively to what is understood as electric movement, and is used in the same sense when applied to this movement in a conductor, as when applied to the flow of water in a pipe; and in this sense also are used the terms current intensity, quantity, volume, strength, and resistance; and on this principle all the various kinds of electric apparatus pertaining to current are constructed, and current estimates and measurements made. In the present imperfect state of electric knowledge, this is doubtless the best that can be done; and yet it is doubtful whether there is any real resemblance between an electric current and a liquid current, or current of vapor or air. The generator creates E. M. F. at one end of the conductor, and a molecular movement is supposed to take place by which electric energy is instantly transmitted. Theoretically, this molecular movement is in the form of transverse vibrations; but as a matter of fact, its nature is unknown. It seems to be well established, however, that there is no transmission of any thing in the nature of a fluid or other matter, energy alone being transmitted, using matter as its medium.

Current movement is always from higher to lower potential, or, which is the same thing, from positive to negative. Hence, since E. M. F. depends on difference of potential, the strength of current passing through a circuit of no resistance from the positive to the negative side of the dynamo depends solely on the amount of this difference. But when the circuit includes lamps or other resistance, the strength of current depends on the E. M. F. divided by the resistance, according to Ohm's law, the case being analogous to that of water flowing through a pipe under pressure and resistance. Hence any variation, either of E. M. F. or resistance, changes the strength of the current; and where current constancy is required, as in electric lighting, it can be obtained by varying the E. M. F. in the same ratio as the resistance; and this, as we have seen, is done, in most cases, by shifting the position of the brushes on the commutator, in others by varying the number of armature or field-magnet coils in circuit. The strength of the current can also be varied by varying the resistance of a weaker opposing current, as has been shown.

To the ordinary mechanic or business man, accustomed to deal with material forces, and unversed in philosophic subtleties, the movement of electric energy in a conductor is often a profound mystery. He naturally associates energy and matter so intimately that he is unable to discriminate between them, or to conceive how energy can traverse a conductor unless it is a material substance of the nature of a fluid. And until recently philosophers found the same difficulty; hence the terms phlogiston and electric fluid, representing imaginary material substances, the supposed active principles of heat and electricity.

But while we do not know just how electric energy is transmitted, it is not difficult to conceive how it may be, since we have analogous instances; and the theory most generally adopted is that of vibration, which is the more probable since it is equally applicable to the kindred forms of energy, light, and heat. According to this theory, the molecules of the conductor are thrown into a state of intense vibration, transverse vibrations traversing it, and transmitting the energy in a manner analogous to that by which mechanical energy is transmitted through a series of suspended balls, or along the surface of a liquid.

The symbol of current is C; and the conductivity of a conductor, that is, its current capacity, without reference to the material of which it is composed, is inversely as its length, and directly as the area of its cross-section.

ELECTRIC INDUCTION. — By electric induction is meant the influence which a charged conductor exerts on another conductor in its vicinity, insulated from it. It may be considered under two divisions, — static induction and current induction; static induction pertaining to accumulators, as Leyden jars and condensers; and current induction pertaining to the mutual influence of currents.

If an accumulator is charged positively, it produces a corresponding negative charge on all bodies in its immediate vicinity, electricity equal to that of the positive charge being repelled from them: if negatively charged, a correspondingly equal positive charge is attracted, and accumulated on them. In either case there is no electric transfer of such a nature as to reduce the original charge: the accumulator, if posi-

tively charged, loses no electricity; and, if negatively charged, it gains none. This is proved by the fact, that, where surrounding objects are subsequently removed beyond the influence of the charged body, no permanent effects remain on them unless special means are used to render such effects permanent. This may be demonstrated by placing a gold leaf electroscope in the vicinity of the charged body, when the leaves will indicate the charge by their divergence; but on being removed, they converge again. To make this effect permanent, let the plate of the electroscope, while under the influence of the charge, be touched by a conductor connected with the earth; a transfer of electricity will now take place, either to or from the earth, according as the charge is positive or negative, establishing equilibrium between the electroscope and charged body, as indicated by the convergence of the leaves, thus proving the fact of attraction or repulsion of electricity, as stated above; then, on the removal of the electroscope from the influence of the charged body, difference of potential asserts itself, and the leaves diverge. Now, since the electroscope is simply one of the surrounding bodies under inductive influence, so constructed as to indicate it, we must infer that all other bodies similarly placed are similarly influenced.

Induction can take place only through an insulating medium, — as air, glass, or an insulating envelope, — which is termed the dielectric. Its nature is not fully understood; but since there is no actual transfer of electricity, and since energy can act only through matter as its medium, it is evident that the dielectric, in some unknown manner, becomes the medium of this subtile influence. The definition, "direct action at a dis-

tance," formerly used by some leading electricians, is too vague, and has been abandoned since the nature of electric action has come to be better understood.

Current induction is of the same nature as static, modified by the properties peculiar to currents. That which we call a continuous current is in reality a succession of impulses or infinitesimal currents, as has been already explained; and the conductor throughout its entire length, whether it be an Atlantic cable or a foot of wire, has practically, at each successive instant, a static charge modified by the difference of potential between its extremities, by virtue of which the transfer of energy takes place; consequently this charged conductor, like other charged conductors, exerts inductive influence on adjacent conductors.

When a current flows through a conductor, it is found that the effect of induction is to produce an opposite current in any adjacent parallel conductor. The nature of this action may be represented by the following diagram:

$$(a) + 10 + + + + + + + + + 1$$
$$(b) - \ 2 - - - - - - - - - \tfrac{1}{5}$$

Let a represent a conductor in which a current is flowing from left to right by virtue of the difference of potential represented by $+10$ at the left and $+1$ at the right; and let b represent an adjacent parallel conductor. Since inductive influence radiates from the charged body equally in all directions, only a small fraction of the lines of electric force radiating from a are intercepted by b; but, for convenience, we may represent this fraction by $-\frac{1}{5}$ at the right, and -2 at the left. Now, since, as has been shown, the positive

produces by induction an equal corresponding negative, and *vice versa*, the positive potential in *a*, represented by + 10, produces, under the conditions named, a negative potential in *b*, represented at the adjacent point at the left by — 2, while at the right + 1 in *a* produces — $\frac{1}{5}$ in *b*; and since electric movement is always from higher to lower potential, the current in *b* must flow from right to left, opposite to that in *a*.

Hence, when currents in two or more adjacent parallel conductors flow in the same direction, the effect of their mutual induction is to produce in each a counter-current, which reduces the volume of the primary current; the effective current by which useful work is accomplished being then represented by the difference between the two. As in the illustration, if the primary current were represented by 10, and the induced opposing current by 2, the effective current would be represented by 8.

But if the primary currents flow in opposite directions, the effect of induction is reversed, and the volume of effective current in each conductor increased, as can easily be seen by the following diagram:

(*c*) + 10 + + + + + + + + + 1
(*d*) + 1 + + + + + + + + + 10

in which the current in *c* flows from left to right, and in *d* from right to left. The positive potential 10, at the left of *c*, induces at the same end of *d* a much stronger negative than the potential 1, of *d*, can induce in *c*: consequently the difference of potential between the opposite extremities of *d* must be greater than if *c* were removed, and hence its E. M. F. and resulting volume of current must be greater. And the same effect

in *c* must follow from the difference of potential at the right between the 10 of *d* and the 1 of *c*.

The effect of induction in increasing current strength at the expense of E. M. F., or E. M. F. at the expense of current strength, has already been sufficiently explained in connection with the subject of converters, treated of in Chapter III., so that further reference to it is unnecessary.

Magnetic Induction. — Magnetic induction, while strongly resembling electric induction, must be carefully distinguished from it: their effects are reciprocal, not identical. Practically, magnetic induction is found only in connection with iron and steel, though some other metals are slightly magnetic; and, as we have seen, the construction and operation of the dynamo is dependent on the reciprocal action of magnetic and electric induction, the electric current being generated by the magnetic induction of the iron cores of the field-magnets and armature, and reciprocally, magnetism being generated by the electric induction of the current in the coils. The directions of the magnetic and electric currents produced by this reciprocal induction are always at right angles to each other; the magnet and the coil or line conveying the electric current, if free to move, always assuming this relative position with respect to each other.

The induced current, as has been repeatedly stated, is a momentary transient impulse which occurs at the instant an electric circuit is either opened or closed; its direction on the opening of the circuit being the reverse of that on the closing: and the continuous current of the dynamo, whether constant or alternating, is composed of a series of these impulses, induced, not by

the opening or closing of the circuit, but by a reversal of the position of the coils of the armature by their rotation, and consequently of the relative direction of magnetic induction.

In the case of induction coils, the primary circuit is opened and closed successively, with great rapidity, by a circuit-breaker, and the series of impulses constituting the current, in the secondary circuit induced thereby. It is found that the current induced by the opening of a circuit is far more powerful than that induced by the closing. This is due to the transient current termed *extra*, resulting from self-induction between the adjacent windings of the coil; which is inverse on closing the circuit, neutralizing the original current to the extent of its strength, but direct on opening, adding its strength to that of the original current. The greater strength of the latter current, in the primary coil, is shown by the spark which appears at the break, on opening the circuit, but is never seen on closing it. In the case of accidents requiring the sudden stoppage of the dynamo, it is of the highest importance that the greater energy of this current should be guarded against by suitable construction, such as a short-circuiting switch or other similar device.

In concluding these remarks on the nature and general principles of induction, which have been thus briefly indicated, it should be stated that when we consider that induction permeates every portion of every electric instrument, its force radiating from every charged conductor, the great importance of a thorough comprehension of its principles and their application becomes evident. It must be recognized, not as an obstacle to be overcome, — though it often

stands in the way of desirable ends in construction, — but as an important factor in the accomplishment of electric work, without which the construction and operation of the existing forms of electric apparatus would be an impossibility; and it is coming to be understood that it is better always to recognize it as a friend than as a foe.

CONDUCTIVITY AND INSULATION. — Conductivity is that quality of a body which facilitates electric transmission: insulation is its opposite, and obstructs electric transmission. The distinction between the two when applied to bodies is one of degree, the one being the reciprocal of the other. There is no well-defined boundary showing where conductivity ceases, and insulation begins; every conductor is an insulator so far as it tends to resist electric transmission, and every insulator is a conductor so far as it tends to facilitate such transmission. Where conductivity is found to predominate, as in the metals, the term conductor is applied; and where insulation predominates, as in glass and vulcanite, the term insulator is applied. The terms high and low are applied to conductors to designate different degrees of conductivity, or, conversely, different degrees of resistance; and to insulators to designate different degrees of insulation. Silver and copper, for instance, are metals of the highest conductivity, and conversely of the lowest resistance: bismuth and german-silver have high resistance, and consequently low conductivity. Glass and vulcanite have high insulation, and correspondingly low conductivity, — so low that the term conductor is never applied to them; nor is the term insulator ever applied to silver or copper. Hence a conductor is any substance of such low resistance that

it can be used practically for the transmission of electricity, and a non-conductor or insulator is any substance of such high resistance that it can be used practically to prevent such transmission.

Difference of molecular constitution is the most reasonable explanation that can be given of these different phenomena; but just how such difference produces these varied results, is unknown. But we may reasonably attribute them to difference in molecular arrangement. If we compare the molecules to an infinite number of infinitesimal tubes, and electricity to a fluid passing through them, it is evident that were these tubes placed end to end, in series, the flow would be facilitated; but if disposed traversely, or in a heterogeneous manner, the flow would be obstructed. Similarly we may suppose the relative arrangement of the molecules in one substance to be such as to facilitate, and in another to obstruct, electric transmission. If, as seems highly probable, electricity is a mode of molecular motion by which energy manifests itself, the above explanation seems entirely reasonable; difference of arrangement or difference of shape in the molecules, or both combined, producing differences in the mode of interaction.

Quantity and Intensity. — The comparatively imperfect state of electric knowledge has led to a misuse of the terms quantity, intensity, and strength as applied to current, each writer using them according to his own mental conception of the facts, or carelessly following the general custom. Whatever current may be, its quantity, as observation proves, must be regarded in the same light as that of any physical quantity; so that whether we consider it as energy flowing

through the conductor as its passive medium, or as producing molecular motion in the conductor itself, as already explained, it has a certain volume in the same sense as a fluid — water or gas — flowing through a pipe; and this volume, as in the case of fluids, is dependent on the resistance encountered and the pressure urging it forward, known as E. M. F. With a given conductivity and E. M. F., any increase of cross-section by the substitution of a larger conductor, or a greater number of conductors, produces an increase in the quantity or volume of the current, and a corresponding decrease of intensity at each point in cross-section, by distributing the original intensity over a larger area; and a reversal of these conditions produces the opposite effect. Conversely with a given conductivity and cross-section in the conductor, any variation in the E. M. F. produces a corresponding variation of intensity.

Electric intensity has been regarded as analogous to momentum; but since momentum is the product of mass and velocity, and since mass is not a factor in electric intensity, the analogy fails. But if we regard electric intensity as the result of molecular movement in the conductor, produced by E. M. F., we shall probably come nearer the exact truth.

It has also been assumed that the constancy of an electric current is maintained by an increase of velocity in the inverse ratio of the reduction of cross-section in the conductor, in a manner analogous to that in which constancy of quantity is maintained in a fluid current by an increase of velocity in the inverse ratio of reduction in size of pipe, the same quantity passing through the smaller pipe in the same time as through the larger,

by an increase of velocity; but since the velocity of an electric current has never been estimated except by the remotest approximation, the analogy fails, as in the former instance. But if we regard varied quantity and intensity of molecular vibration, produced by a variation in the amplitude or the length of the waves, by which electric energy is supposed to be transmitted, as the true explanation, our conceptions of these phenomena become much clearer.

ELECTRIC UNITS. — In order to render possible the calculations required in the various departments of electric work, and especially in electric engineering, it becomes necessary to have certain units of measurement especially adapted to the peculiar electric conditions found in electro-motive force, resistance, and current. It is also necessary that these units should be established by some authoritative source, universally recognized and acknowledged. The International Electric Congress, composed of leading electricians of various nationalities, which met at Paris in 1881 and 1884, was such a body; and the electric units it adopted after careful deliberation have been accepted as authoritative. Most of these units were previously in use; and the work of the Congress consisted chiefly in giving them definite value, referable to fixed standards, and eliminating various errors.

The work accomplished by electric energy furnishes the means for absolute measurement, and the C. G. S. mechanical unit is taken as the basis for the electric unit. The initial letters, C. G. S., are the symbols of the three factors, space, mass, and time; C. standing for centimeter, G. for gramme, and S. for second. Hence this C. G. S. unit represents the work accom-

plished by the movement of a mass equal to one gramme through a space equal to one centimeter in one second, known as the erg.

The term "legal" is applied to the units adopted by the Paris congress to show that they are properly authorized, and to distinguish them from similar units previously in use. Hence, the following are the practical legal electric units based on the C. G. S. system: —

THE VOLT. — The unit of electro-motive force is the volt, named after Volta, the original inventor of the primary battery. The E. M. F. of a battery cell nearly equal to that of the Daniell, was originally adopted as the standard unit; but, as the E. M. F. of a cell represents a variable quantity, a definite value was given this unit by the adoption of 100,000,000 C. G. S. units as the standard, which consequently represent the amount of electric energy, which, if converted without loss, would equal this amount of mechanical force; but, as large numbers are inconvenient to write, the equivalent expression, 10^8, has been adopted, and the same method of notation followed in regard to the other units. Hence, the legal volt equals 10^8 C. G. S. units. In approximate calculations, where strict accuracy is not required, the E. M. F. of the ordinary Daniell cell is still taken to represent the volt, its energy being about 1.05 volts.

THE OHM. — The unit of resistance is the ohm, named after Ohm, who discovered and formulated the law of electric resistance. The resistance of a given number of feet of wire — copper, iron, or german-silver — of a given gauge was the original standard; but the Paris congress, acting upon the suggestion of Sir William Siemens, adopted as the standard a column of pure mercury, 106 centimeters in length, and 1 square

millimeter in cross-section, at the temperature of 0° C. Its resistance is represented, to within a small fraction, by 10^9 C. G. S. units; the actual resistance represented by this expression being equal to that of a column of mercury, of the same section and temperature, 106.21 centimeters in length; but, to avoid the fraction, the standard was fixed as above. The legal ohm, then, equals 10^9 C. G. S. units of resistance.

THE AMPERE. — The unit of current strength or volume, as has been explained, is the ampere, named after Ampere, who discovered and formulated the laws of electric currents. It is derived from the two preceding units in accordance with Ohm's law; current being equal to E. M. F. divided by resistance

$\left(C = \frac{E}{R}\right)$ hence since $\frac{10^8}{10^9} = 10^{-1} = \frac{1}{10}$, the legal ampere

equals 10^{-1} C. G. S. units of current strength. The element of time is not included in this unit. It refers exclusively to the strength of the current, as represented by its cross-section.

THE AMPERE-HOUR. — The ampere-hour is a unit derived from the last, in which the element of time is included. It represents a current of one ampere flowing through a conductor for one hour, or its equivalent in a greater or less current for a greater or less time, as two amperes for half an hour, or half an ampere for two hours. It is of recent origin, but is sanctioned by general use, and is often convenient in electric calculations.

THE COULOMB. — The unit of current quantity, considered with reference to time, is the coulomb, named after Coulomb, to whom is due the first attempt at

accuracy in electric science. It is derived from the ampere, and represents the quantity of electricity which flows in a current of one ampere in one second. Hence, any variation, either in the time or strength of current, produces a corresponding variation in the quantity represented in coulombs; a ten-ampere current flowing for one second, or a one-ampere current flowing for ten seconds, represents ten coulombs; and, since there are 3,600 seconds in an hour, 3,600 coulombs equal one ampere-hour. The coulomb equals 10^{-1} C. G. S. units of current quantity.

THE FARAD. — The electric unit of capacity is the farad, named after Faraday. It represents the storage of one coulomb of electricity in a condenser; and, when such storage raises the potential to one volt, the condenser is said to be of one farad capacity. The farad equals 10^{-9} C. G. S. units of capacity.

THE MICROFARAD. — The farad being inconveniently large for practical use in the construction of condensers, the microfarad, representing one-millionth of a farad, has been adopted in its stead. Hence the microfarad equals 10^{-15} C. G. S. units of capacity.

THE WATT. — The unit of electric power is the watt, named after Watt the inventor of the steam-engine. It is derived from electro-motive force and current combined, neither of which, taken alone, is an exact representative of electric power, since current is derived from resistance and E. M. F., either of which may vary, producing a variation of current; or one may vary directly as the other, producing a constancy of current; hence, to obtain an accurate expression for electric power, or rate of work, the E. M. F. is multiplied into the current, — that is, the volt into the ampere. A

watt then equals one volt multiplied into one ampere, which equals 10^7 C. G. S. units of power ($10^8 \times 10^{-1} = 10^7$). The term volt-ampere is synonymous with watt.

THE ELECTRIC HORSE-POWER. — The electric horse-power, which is the equivalent of the mechanical horse-power, is represented by 746 watts, equal to $746 \times 10^7 = 7{,}460{,}000{,}000$ C. G. S. units of power.

THE JOULE. — The electric unit of heat is the joule, named after Joule who discovered and formulated the law by which the electric current develops heat. It represents the heat developed in a conductor by one watt in one second; which equals the square of the current's strength multiplied by the resistance and time, represented by $H = C^2Rt$; H representing heat and t time; which, reduced to the C. G. S. units represented by $(1 \text{ amp.})^2 \times 1 \text{ ohm} \times 1 \text{ sec.}$, gives $H = (\frac{1}{10})^2 \times 10^9 \times 1 = 10{,}000{,}000$.

Joule found that the heat required to raise the temperature of 1 gramme of water 1° C. is equivalent in work to 42,000,000 C. G. S. units, which is known as *Joule's equivalent.*

As the ratio of the joule to this is $\frac{10{,}000{,}000}{42{,}000{,}000} = 0.238$, this fraction represents the relative amount of heat which the joule can develop. Hence the formula, C^2Rt, must be multiplied by 0.238 to reduce the C. G. S. units of work represented by the joule to heat units, as represented by Joule's equivalent, which gives $H = C^2Rt \times 0.238$.

CHAPTER VI.

Electric Measurement.

Instruments for electric measurement are constructed either on the principle of electric attraction and repulsion, on the relations between electricity and magnetism and between resistance and E. M. F., on the heat developed by the electric current, or on the amount of metal deposited or gas generated by electrolysis. Those constructed on the principle discovered by Oersted, that the magnetic needle tends to assume a position at right angles to the direction of the electric current, are known as galvanometers, and are chiefly used to measure battery currents; while those constructed on the principles of electrolysis are known as voltameters, and are used to measure the electro-motive force of batteries. But the powerful currents and great E. M. F. developed by the dynamo, has led to the invention of instruments of special construction, known chiefly as voltmeters and ammeters; voltmeters designating those which measure electro-motive force, the results being given in volts; and ammeters those which measure current strength, the results being given in amperes. Ammeters are also called current meters and ampere meters. There are also instruments of special construction designated as electro-dynamometers, coulomb-meters and ohm-meters.

It is evident, that since current is derived from E. M. F. and resistance, if two of these three quantities

are known, the third can easily be found by one of the following formulæ,

$$\left(C = \frac{E}{R}\right), \quad (E = CR), \quad \left(R = \frac{E}{C}\right),$$

Hence C and E being ascertained by measurement, R can be ascertained by calculation.

There are also instruments known as potential indicators, which do not measure E. M. F., but are arranged to indicate deviations above or below a certain normal E. M. F., and are placed permanently in the circuit, like the steam-gauge on the boiler, as a guide to the engineer or attendant; while measuring instruments are used chiefly in making tests.

THE POTENTIAL INDICATOR. — Fig. 63 shows a potential indicator used by the United States Electric Lighting Company. It is constructed on the principle of the electric motor, or reversed dynamo, current producing motion, instead of motion producing current. Two horse-shoe magnets with consequent poles, placed horizontally, as shown, form the magnetic field in which is placed the armature, shown at the center; the armature core is a cylinder of soft iron, laminated, placed vertically in a fixed position. A helix of fine copper wire, wound on a copper ring and placed vertically also, surrounds the core, but is insulated from it, an air space intervening between them. This helix is suspended by a fine phosphor-bronze wire attached below to the base of the instrument, and above to a screw with a milled head, connected to a short arm projecting from a vertical support. A long pointer projects towards the front, and is bent downwards at right angles over a circular scale, which indicates, to the right,

five volts above, and to the left, five volts below, a certain normal E. M. F. indicated by zero ; each of the numbers, 10, 20, 30, 40, 50, indicating about a volt, and each volt space being subdivided into tenths, as shown. The in-

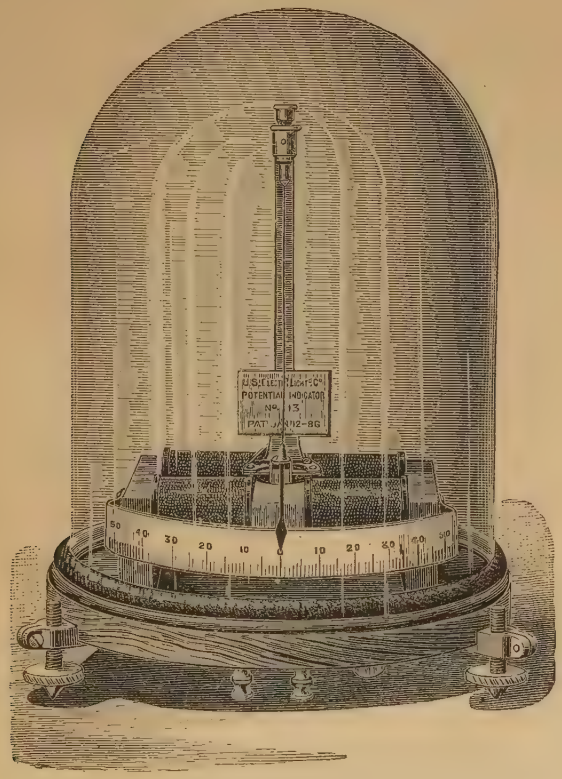

Fig. 63.

strument is inclosed in a glass case, and supported on leveling screws. It has a very high resistance, and is connected directly between the positive and negative leads at the point where the electric pressure should be

kept constant. The resistance being very high, only a very small fraction of the current will pass through it. The armature helix is connected in series with the field-magnet coils, as in the series dynamo; and the current causes it to rotate round its core so as to move the pointer over the scale from left to right in opposition to the torsion of the wire by which it is suspended, current producing motion as stated above. The torsion is so adjusted that the required E. M. F. brings the pointer to zero; hence its movement to the right of zero shows that the E. M. F. is too high, or, to the left, that it is too low. By an increase or decrease of torsion, the normal E. M. F. can be varied within certain limits.

Voltmeters and Ammeters.—The difference between these two instruments consists chiefly in the respective resistance of each, and its relative position in use; the voltmeter having high resistance and being placed in a derived circuit between the points whose difference of potential is to be measured, while the ammeter has low resistance and is placed directly in the main circuit at any point where current strength is to be measured.

The Weston Voltmeter.—This instrument, shown by Fig. 64, incloses within its case a powerful steel horse-shoe magnet, the poles of which project into the narrow space in front and are attached to two soft-iron pole-pieces, as shown in Fig. 65. These inclose a circular space, within which is mounted a soft-iron armature core, maintained in a fixed central position by attachment to a brass yoke which connects the pole-pieces; part of this yoke, with its right-hand connection and a central projection for attachment of the core, being shown.

A light copper frame, $\frac{3}{8}$ of an inch wide, and wound

with a coil of fine, insulated, copper wire, surrounds the core, and has a limited rotary motion, on jewelled bearings, in the narrow space between the core and pole-pieces, which is just wide enough to allow rotation without contact.

The terminals of the coil are connected above and below with two flat springs, oppositely coiled, and so attached to the copper frame and adjoining parts as to maintain the coil in a fixed position, when the springs are not under tension, and bring a light aluminium pointer, attached to the frame, to zero of the scale on the left.

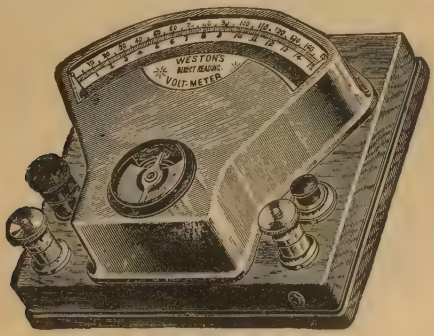

Fig. 64.

These springs are made of a special, non-magnetic alloy, and are placed in opposition to neutralize the effects of expansion and contraction under variations of temperature.

A resistance coil, mounted within the case, makes electric connection, by one of its terminals, with one of the springs, while the other terminal is connected with the front binding-post on the left. Another connection with the rear binding-post on the same side taps this coil at a point nearer the spring, so as to include a much

lower resistance. The other spring is connected with the binding-post on the right, back of which is a contact key and a calibrating coil. This part of the circuit can be closed permanently, after calibration, by depressing the key and giving it a quarter-turn.

When connections with an electric source are made by

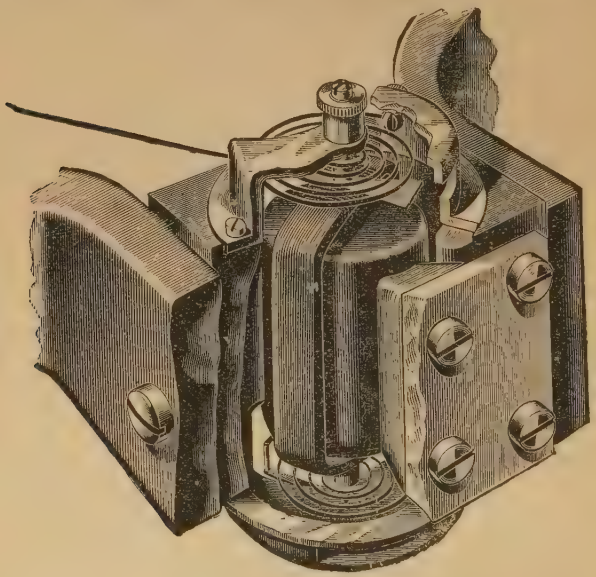

Fig. 65.

the right binding-post and either of the two on the left, the current enters and leaves the copper coil through the springs, its direction and the winding being such as to produce deflection from left to right; the coil tending to rotate into a position at right angles to the lines of magnetic force, in opposition to the tension of the springs. And the instrument being calibrated in accordance with the resistance of its coils, the deflection of the pointer will indicate the difference of potential in volts; since

with a given resistance the E. M. F., or potential difference, varies directly as the current strength.

The entire resistance is to that of the sectional part in the ratio of 20 to 1; the divisions of the scale being in volts for the outer reading, corresponding to the high resistance, and the same in twentieths of a volt for the inner reading, corresponding to the low resistance, as shown. Hence the E. M. F. which will produce a deflection of one division, when connection is made with the front binding-post on the left, will produce a deflection of twenty divisions when connection is made with the rear binding-post.

The high-resistance circuit is used for apparatus generating strong currents, as dynamos, and the low-resistance circuit for apparatus generating weaker currents, as primary batteries, on account of its greater sensitiveness: and as a dynamo current would be likely to injure or destroy the copper coil, if admitted through the low resistance, the rear post is protected from accidental contacts by an outer covering of hard rubber. In some of the instruments all the posts are similarly protected; the rubber also preserving the contacts from oxidation. The scale readings also vary in different instruments.

The deflection of a current-bearing coil in a magnetic field of special strength gives the instrument great superiority over instruments depending on the deflection of a steel or soft-iron needle; the magnetic action being stronger, and its relation to the current more direct. The constancy of the instrument is dependent solely on the constancy of the magnet, the springs, and the internal resistance.

The Weston Ammeter.—The construction of the Weston ammeter is similar to that of the voltmeter, but

simpler; the chief differences being that the copper coil is of coarser wire, having much lower resistance, and the resistance coil is not required: hence there are only two binding-posts and a single circuit, directly through the copper coil and springs.

The scales for different instruments range from 5 amperes, with divisions of $\frac{1}{20}$ of an ampere, to 100 amperes, with divisions of 1 ampere, according to the relative resistance of the coils.

The Weston Milliammeter.—This instrument has the same construction as the ammeter, but lower resistance. Instruments of two different resistances, with scales of corresponding difference, are constructed; one of 300 milliamperes, with scale divisions of 2 milliamperes each; and the other of 600 milliamperes, with scale divisions of 4 milliamperes each.

A milliampere being $\frac{1}{1000}$ of an ampere, it is evident that these instruments are capable of measuring very low currents, especially as the scale divisions are readable to fifths; so that the smaller instrument can indicate a current of $\frac{1}{5}$ of 2 milliamperes, $= \frac{1}{2500}$ of an ampere.

The Wirt Voltmeter.—This instrument, illustrated by Fig. 66, is constructed on the principle of ascertaining the E. M. F. to be measured by comparison with a known E. M. F.; each being proportional to a resistance having similar conditions through which the measurement is made.

The case incloses two Clark cells, each having a constant E. M. F. of 1.43 volts, the connections being so arranged that either can be employed alone, or the two joined in series so as to obtain an E. M. F. of 2.86 volts. Under the glass cover is shown a small galvanometer, with magnetic needle, light aluminium pointer, and

terminal wires connected with the coil; also a small scale, not shown, under the pointer, having a limited range, in opposite directions, from 0 at the centre.

Extending round the case inside is a coil of german-silver wire, having a resistance of about 2500 ohms, one terminal of which is attached to one of the binding-posts shown on the right, marked +, while a sliding contact,

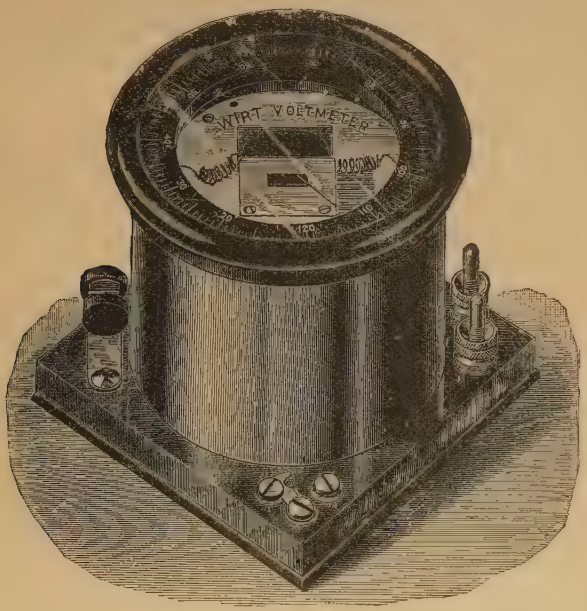

Fig. 66.

which can be moved to any required point on this coil, is connected with the other binding-post, marked —; and this contact is attached to the rim of the hard-rubber cap, shown above, which can be rotated on the interior part of the cap, on which is shown a scale graduated in volts, from $1\frac{1}{2}$ to 120. By rotating this rim, a short in-

dex, attached to it, is moved to any required point on the scale, the sliding contact being moved simultaneously, so as to include any resistance required between the terminals of the binding-posts.

The galvanometer circuit also includes a certain portion of this coil, having a known resistance calibrated with reference to the known E. M. F. of the battery cells, which are also included in this part of the circuit. A contact key, shown on the left, closes this circuit through the galvanometer, producing deflection of the needle and attached pointer.

If connection with a generator whose E. M. F. is to be measured be made through the binding-posts, so that the current shall oppose the meter's battery current, the needle will be deflected, when the contact key is closed, so long as the generator current is stronger or weaker than that of the battery.

Let the instrument be so placed that the earth's magnetism shall bring the galvanometer pointer to 0 on the small scale; and let the rim be turned so as to bring the attached index near the probable E. M. F. on the large scale; then, deflection being produced by closing the contact key, let the rim be turned so as to include sufficient resistance to equalize the opposing currents and bring the galvanometer pointer back to 0; the index will then show the E. M. F. of the generator in volts on the large scale. For since, with a given current, E. M. F. varies directly as resistance, if the E. M. F. of the battery be represented by E and that of the generator by E', the resistance of the battery circuit by R and that of the generator circuit by R', then $R : R' :: E : E'$. That is, the resistance of the battery circuit is to the resistance of the generator circuit as the E. M. F. of the battery is to

the E. M. F. of the generator, and the calibration gives this E. M. F. in volts.

A switch is shown in front by which connection can be made with either of two separate circuits, the right-hand contact, marked $\frac{1}{10}$ to indicate the relative measurement of E. M. F., connecting with one having ten times the resistance of that connected with the left-hand contact. At the opposite corner, in the rear, three battery connections are arranged, the right and left ones, marked *A* and *B*, being each through a separate cell, and the central one, marked 2, through the two cells in series; a plug closing whichever connection is to be used. When the switch is on contact 1, as shown, and the plug in *A* or *B*, the scale readings require no correction, and should be the same with the plug in either hole, each cell being a check on the accuracy of the other. But when the plug is in hole 2, the cells being in series, the reading must be multiplied by 2, since the battery E. M. F. is doubled; for $R : R' :: 2E : 2E'$.

But when a generator of low E. M. F. is to be tested, the switch is connected with the contact marked $\frac{1}{10}$, which includes, in the battery circuit, a resistance of ten times that included by contact 1; hence, since the battery current with this resistance is only $\frac{1}{10}$ of what it was with the former resistance, $\frac{1}{10}$ the E. M. F. will develop an opposing current of equal strength, giving the same reading, which must be divided by 10 to give the correct E. M. F.; for $10R : R' :: 10E : E'$.

Each cell is $1\frac{5}{8}$ inches high and $\frac{5}{8}$ of an inch in diameter constructed with an inverted glass cup, inclosed in a brass case and hermetically sealed with soft rubber melted into the bottom.

The electrodes are zinc and mercury, and the fluid

sulphate of zinc and sulphate of mercury, formed into a paste in which the electrodes are inclosed; connection with the mercury being made by an insulated platinum strip which represents the positive pole.

This cell is selected on account of the remarkable constancy of its E. M. F., and the instrument is calibrated for a cell temperature of 21° C., requiring a correction in the reading of .000367 per degree of variation above or below 21° C., which must be made by subtraction for the higher temperature, and by addition for the lower.

The cells are easily removed and replaced, when necessary, without disturbing the connections, and being small, hermetically sealed, and amply protected, do not interfere in the least with the handling of the instrument, and can be cheaply replaced when exhausted.

AYRTON AND PERRY'S SPRING VOLTMETERS AND AMMETERS.—The unreliability of electric measuring instruments constructed with permanent magnets, liable to magnetic loss, or to variation of magnetism from the influence of powerful currents, and consequently requiring frequent recalibration, has led to improved methods of construction, of which the spring voltmeters and ammeters of Ayrton and Perry are a result. Fig. 67 represents the ammeter, the voltmeter being of similar construction; the principle being simply the torsion of a spring by electromagnetic attraction.

The current passes through a long, narrow vertical coil, of high resistance in the voltmeter and low resistance in the ammeter, within which is suspended a light soft-iron tube, which incloses a long spiral spring of phosphor-bronze ribbon. This spring supports the tube, being attached at bottom to a brass cap in which the tube terminates, and above to a milled head which rests on the

glass cover and is connected with the spring by a vertical pin which passes through the glass; a similar pin projects downward from the bottom of the brass cap and passes through a hole in a support below, in which it has a free vertical movement; so that the two pins hold the spring and tube in a vertical position; and the tube being shorter than the coil, its centre on a vertical line is above that of the coil. To the top of the tube is attached a

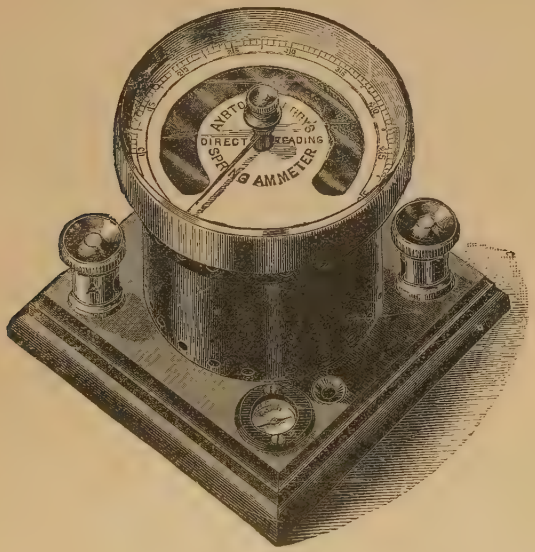

Fig. 67.

light pointer which rotates over a scale graduated either in volts or amperes according to the design of the instrument.

When no current is passing the pointer indicates zero on the left of the scale, but when the current passes the

tube is pulled down by magnetic attraction, in opposition to the torsion of the spring, to a distance proportional to the current's strength; giving it a rotary motion by which the pointer is deflected, which indicates by direct readings the E. M. F. in the voltmeter, and the current strength in the ammeter, according to the respective resistance of each instrument, and its position in the electric circuit.

The tube can be turned by the milled head so as to bring the pointer to the required position in calibrating; and a reflected image of the pointer, in a mirror placed under it, enables the observer to determine accurately its position on the scale.

A little magnetic needle, shown at the front corner of the base, indicates the direction of the current; but as such a needle is liable to have its poles reversed by powerful currents, a bar magnet is preferred for this purpose. Since the deflection of the pointer depends on the magnetic attraction of the tube downwards, it must evidently be always in the same direction, and hence independent of the direction of the current; so that while this direction may be ascertained as above it is not essential to the use of the instrument that it should be known.

A light movable auxiliary coil surrounds the main coil and is connected with it in parallel; this can be moved up or down in calibrating till a position is reached in which its inductive influence on the main coil is best adapted to the construction, where it is made stationary.

The case is ventilated, as shown, to prevent the accumulation of heat generated by the current, which would expand the spring and produce inaccuracy. The usual

binding-posts connected with the terminals of the coil are shown at the right and left, the left post being marked *A* to distinguish them in use.

The voltmeters are usually constructed to measure E. M. F. ranging from 15 volts to 1000; the ammeters, to measure current strength ranging from $\frac{1}{10}$ of an ampere to 600 amperes.

Gravity Ammeters.—While springs have greater constancy than permanent magnets in the construction of electric measuring instruments, their constancy is liable to vary, or be impaired, from well-known causes, as heating, age, and use, imperfect material, or oxidation; but the force of gravity, being always known and constant, may be utilized in such construction to produce instruments of great constancy. On this principle the United States Electric Lighting Company constructed the ammeter shown in Fig. 68.

Two pairs of electromagnets, wound with coils of low resistance, and having laminated soft-iron cores, are placed as shown; each pair having its coils wound on the same core, producing consequent poles, but magnetically insulated from the other pair.

At the center, between these magnets, is mounted a soft-iron armature, lightly poised on a horizontal axis, the end of which is seen through the circular opening, and having a vertical rotary movement parallel to the magnets' plane. This armature is about 2 inches long, $1\frac{1}{2}$ inches wide at each end, $\frac{5}{8}$ of an inch at the center, and $\frac{1}{8}$ of an inch thick; its sides concave, and its ends convex, and slotted to correct the effects of residual magnetism. A pointer, attached to its axis, indicates the readings on a scale above, as shown.

When no current is passing, the armature is main-

tained in a fixed position by one or more little weights attached to its lower left-hand corner, its longer axis being on a diagonal line between the lower left and upper right-hand corner of the instrument, and the

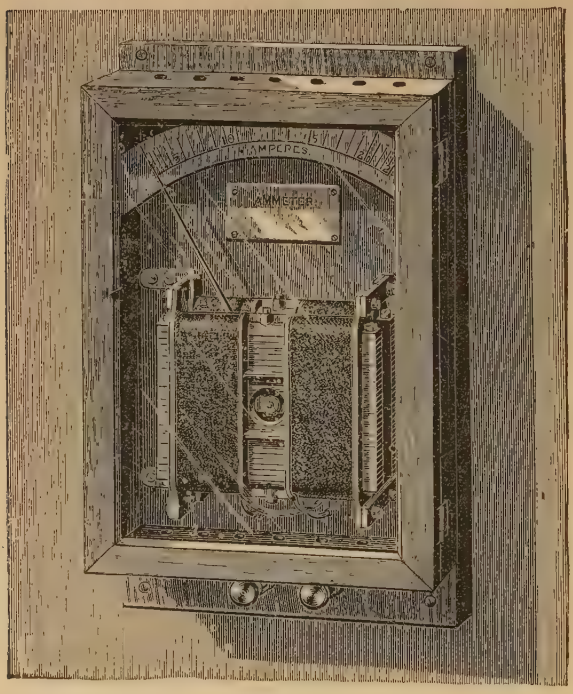

Fig. 68.

pointer at zero on the left of the scale. But when the current passes through the coils in either direction, the armature rotates in obedience to the electromagnetic force, its longer axis tending to assume a horizontal

position, and the pointer is deflected from left to right in proportion to the current strength, which is indicated by direct reading in amperes.

By the removal or addition of one or more of the little weights, the sensitiveness of the instrument may be varied in calibrating, as required for different ranges of current strength. The terminals of the coils are shown at the base, and holes for ventilation at the top of the case.

Instruments constructed on this principle have not been employed to any great extent as voltmeters, not being sufficiently sensitive for the light currents required.

Since the weight, as it rises, recedes from the vertical line which passes through its axis of rotation, the force opposing rotation increases in the direct ratio of the increase of leverage thus produced. Hence, as equal divisions of the scale would represent unequal increments of current strength, they should be made in the inverse ratio of this increase of leverage.

But as it is difficult to mark off such short spaces with the requisite accuracy, a gravity ammeter has been constructed by the Western Electric Company, with a vertical electromagnet having a pole-piece so curved that the rotating armature, as it rises, constantly approaches it, the magnetic attraction increasing in the same ratio as the leverage, so that equal divisions of the scale represent equal increments of current strength.

The Cardew Voltmeter.—The instruments thus far described are designed to be used with direct currents, and are liable to errors arising from self-induction in addition to those from the other causes mentioned. But since, according to a well-known law, the heat developed in an electric conductor is in direct proportion to the

square of the strength of the current passing through it, instruments can evidently be constructed on this principle which will measure either current strength or difference of potential, produced either by direct or alternating currents, and are not liable to variation from any of the causes mentioned. Among these the voltmeter, patented by Cardew in 1886, has a prominent place. Its operation

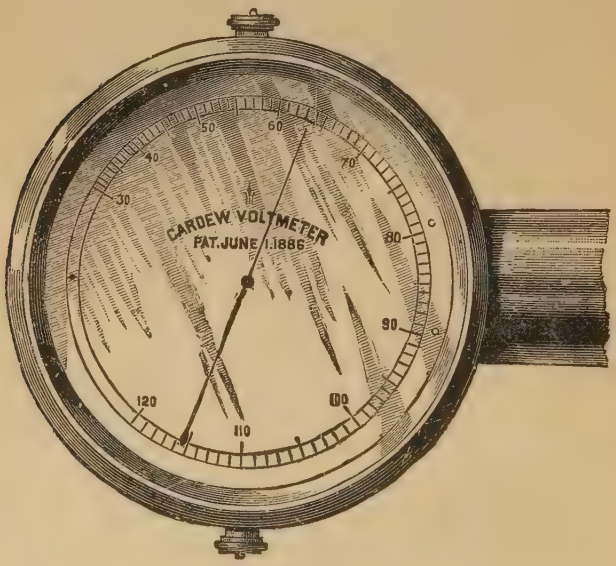

Fig. 69.

depends on the expansion of metal produced by the electric development of heat.

Fig. 69 gives a front view of this instrument and Fig. 70 a rear view, showing its internal construction. A fine platinum wire, 8 feet long, is stretched in four lengths in a horizontal tube, by attachment to a metal frame

and pulleys, as shown at *a a t t* in Fig. 70. This tube is made of very thin metal, one third of its length being iron and two thirds brass to maintain constancy of length between the points of attachment of the wires by such a mode of connection as to produce compensation by the unequal expansion of the two metals; and the horizontal position is given it to maintain constancy of temperature,

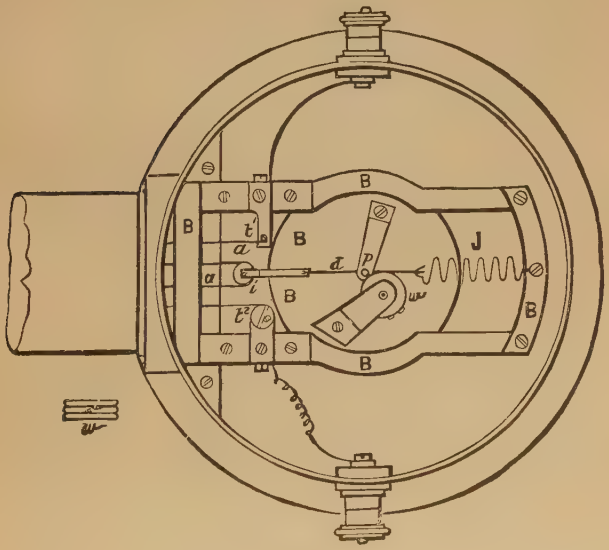

Fig. 70.

and prevent the unequal expansion, from convection of the air to which the tube and wire would be liable in a vertical position.

The wire has a resistance of about 240 ohms, and attains a maximum temperature of about 200° C.; and its

expansion varying in a certain definite ratio dependent on the difference of temperature caused by the passage of the electric current, which, as stated, varies as the square of the current's strength, produces a variation in length proportional to the E. M. F. by which the current is generated. This produces a rotation in the pulley w, to the axis of which the pointer shown in Fig. 69 is attached, which moves in the same direction as watch-hands when the E. M. F. increases, and in the opposite direction when it decreases.

The scale is graduated to correspond to the expansion of the wire; its divisions varying in size, as indicated, in proportion to the variation of expansion produced by the unequal variation of temperature, in the ratio of the square, with equal variation of current strength, and consequently of E. M. F., since resistance remains constant.

This instrument should be calibrated for the average temperature of the room in which it is to be used.

THE EDISON CURRENT METER.—This is a commercial instrument constructed on the principle that the quantity of current consumed on a lamp circuit is in direct proportion to the quantity of metal deposited by electrolysis by a small current from the same source, passing at the same time, through a shunt.

Fig. 71 shows the construction. There are two cells, p, p_1, intended respectively to show the monthly consumption, and the consumption for a longer period, the one to act as a check on the other; each cell contains amalgamated zinc plates immersed in a solution of zinc sulphate, both having precisely the same construction. Underneath each is a corrugated band of German

silver; the twelve corrugations at the left, marked w_2, forming the shunt through which current flows to the cell p; and the four at the right, that through which current flows to the cell p_1, which consequently receives four times the current through one-fourth the resistance.

As the deposition of metal varies with change of temperature, apparatus for equalizing the temperature, and compensating the effects of variation, becomes

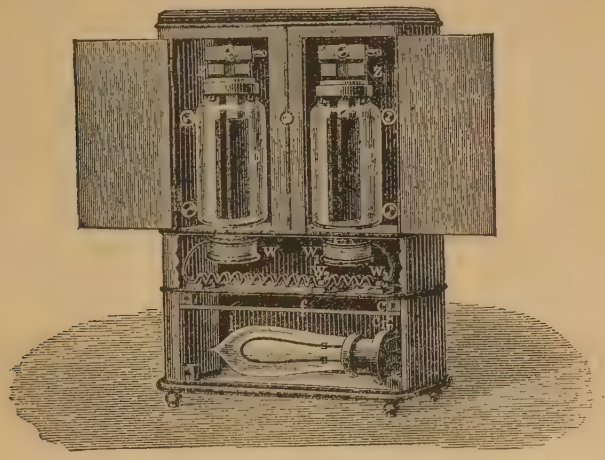

Fig. 71.

necessary. The general temperature of the instrument is equalized by the lamp $l\ c_1$, above which is the compound bar $f\ c$. When the temperature falls below the normal degree, this bar bends down, closing the circuit through the contacts c, c_1, and lighting the lamp: as the temperature rises, this circuit is opened by the upward bending of the bar, and the lamp is extinguished.

But as rise of temperature by the chemical re-action

of the cells increases the conductivity of the solutions, the compensating copper coils, w, w_1, are placed in circuit under each cell respectively. The increase of current through each coil, caused by increase of conductivity in the solution, raises the temperature of the coil, and reduces its conductivity: hence, by making the length of each coil such that its temperature shall vary in the same ratio as that of the solution, compensation is effected; the rise of temperature in the coil reducing its conductivity, and diminishing the current, in the same ratio as the rise of temperature in the solution increases its conductivity, and *vice versa*.

These cells are removed and renewed at stated periods, the zincs weighed, and the amount of current consumed estimated by the amount of zinc deposited. One of the cells is accessible to the consumer, and monthly inspector; while the other is examined only by the higher inspector at the close of the longer period, and the results compared and corrected; the deposition of zinc in each respectively for the different periods being practically the same in consequence of the difference in supply of current.

The Forbes Coulomb-Meter.—Meters like the Edison cannot be used for the measurement of alternating currents; but one has been invented by Forbes, operated by the heat developed by the current, which can measure either direct or alternating currents. Its construction is shown in Fig. 72. The current passes through a flat coil of iron wire, above which is mounted, on a paper cone having a jewelled bearing at its apex, a mica disk, with mica vanes attached. The heat developed by the current produces an ascending current of air which rotates the disk, operating a light train of clock-

work which moves indexes over two dials, registering the current consumption in coulombs; units being registered on one dial and tenths on the other. A glass shade protects the apparatus from external air-currents.

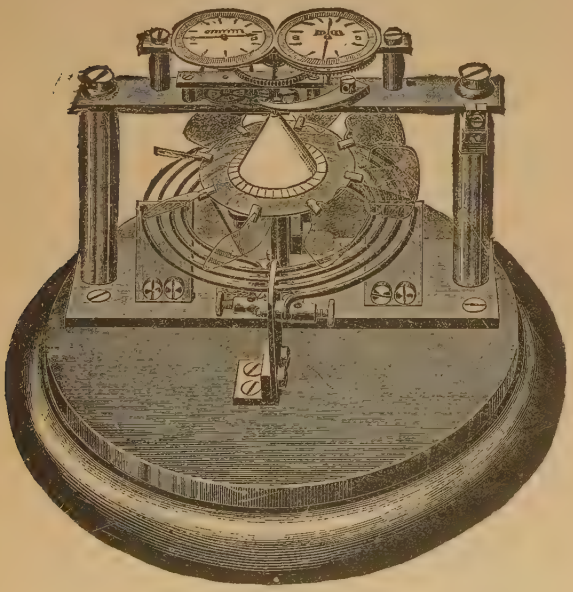

Fig. 72.

The Thomson Recording Watt-Meter.—Since both E. M. F. and current strength are included in electric energy, a meter for commercial use should record their joint product as represented by the watt. Fig. 72½ shows such a meter, invented by Elihu Thomson.

Two field-coils, *A* and *B*, composed of heavy copper wire, varying in diameter from $\frac{1}{8}$ of an inch upward, according to the required capacity of the meter, are mounted as shown, about $\frac{3}{4}$ of an inch apart. They are wound without cores, both in the same direction, in series with each other and with the electric mains; the winding being in vertical planes, parallel to the open ends, and hence at right angles to that of the exterior cloth covering shown in the cut.

They inclose a drum armature of the Siemens type, seen through the opening on the left, composed of eight to sixteen coils of fine copper wire wound vertically, in a closed circuit, on a light frame of non-magnetic

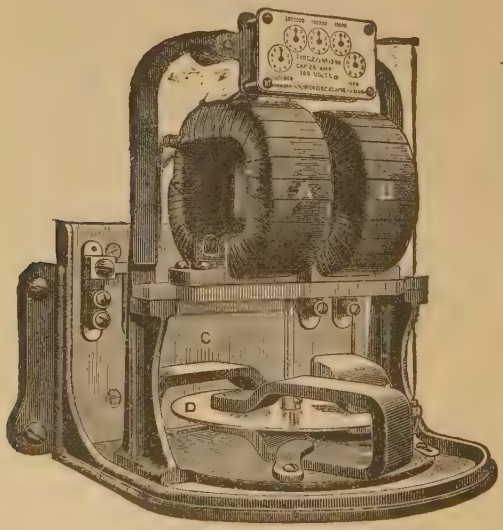

Fig. 72½.

material, and mounted on a vertical shaft, the terminals

of each coil being attached to adjacent segments of a silver commutator, mounted on the shaft just above the armature.

The field-coils, being in series with the mains, carry a current of the same strength, while the armature, which is on a fine wire shunt between the mains, carries only a small percentage of this current, representing the E. M. F. at this point, and equal, at average normal electric pressure, to about $\frac{1}{13}$ to $\frac{1}{10}$ of an ampere, but varying according to pressure and capacity of meter. Hence the mutual induction of the two currents represents the joint product of E. M. F. and current strength, the two factors of electric energy included in the watt.

The shunt current enters and leaves the armature by two silver-tipped copper springs which constitute the brushes, and press against opposite segments of the commutator on the neutral line between the field-coils, as in the dynamo; rotation of the armature being produced by the magnetic polarity induced in the field and armature coils respectively, as in those having iron cores. This polarity is similar on adjacent sides of the field and armature, and opposite on opposite sides; hence each half of the armature is repelled from that side of the field having similar polarity and attracted to that having opposite polarity; and the direction of the current in each armature-coil being reversed by the commutator, on the neutral line, at each half-revolution, the rotation is made continuous. The mode of action is the same as that of the electric motor, or reversed dynamo, current producing rotation, instead of rotation producing current as in the dynamo.

As reversal of current in the field-coils would produce corresponding reversal in the armature coils, the relative

direction of current in each, and hence the relative polarity, would remain the same, producing rotation in the same direction as before reversal. Hence an alternating current produces continuous rotation in the same manner as a direct current, reversal being simultaneous in the field and armature.

The shunt current traverses a german-silver resistance coil in the back *C*, by which its strength and relative E. M. F. may be varied inversely as required; and in meters designed for circuits of very high potential, as 1000 volts, it passes also through a small transformer by which its E. M. F. is reduced.

The shunt circuit being connected to the mains between the field-coils in most of the meters, its current traverses the armature in series with that of the field-coils, instead of in parallel, as it would if the shunt connections were outside of the field-coils; and a slight additional strength of field, and hence of rotary force, is thus gained, which is of importance in compensating friction at low speed of the armature, when the ratio of friction to rotary force is large.

The armature rests in a jewelled bearing, by which its friction is reduced to a minimum. Near its upper end it carries an endless screw which engages a train of gearing by which five pointers are rotated, at different rates of speed, over dials having ten divisions each, recording the energy consumed in watt-hours, on a decimal scale, ranging from 10,000,000 on the left-hand dial to 1000 on the right-hand dial; each indicating a decimal part of that indicated on the next preceding dial to the left. A watt-hour represents the electric energy of a current of one watt flowing for one hour, or its equiva-

lent for any fraction of an hour, as a ten-watt current for a tenth of an hour.

Attached to the shaft, near its lower end, is a copper disk, *D*, which rotates between the poles of three magnets, generating an opposing force by which the speed of the armature is limited and controlled, and which varies as the number of lines of force cut by the disk per unit of time, and therefore in the same ratio as the speed. This prevents excessive speed, also speed due to mechanical momentum in excess of electric energy, and puts the apparatus under the control of opposing forces generated solely by the electric energy, and therefore correctly representing it.

By increasing or diminishing the distance of the magnets' poles from the centre, the retardation can be correspondingly increased or diminished, and the speed regulated as required in calibration. Magnetic loss can also be thus compensated when recalibration is required. This loss is slight, however, as the constancy of the magnets is improved by a special seasoning before they are put in use.

These meters vary in minor details of construction, with reference to their capacity and the use for which each is designed; and they are thus adapted to different systems of electric distribution, and to direct or alternating currents; those intended for direct currents requiring non-magnetic frames. They range in current capacity from 10 amperes to 150, and in potential capacity from 50 volts to 2000.

Measurement of Electric Resistance.—Since current strength depends on the mutual relations of electromotive force and resistance, it is evident that apparatus for varying resistance by the introduction or withdrawal of a definite known quantity, and of ascertaining and

measuring it when unknown, in order to properly adjust these mutual relations, is a matter of the highest importance in electrical construction. Resistance may be varied, as already shown, by varying the length or diameter of the conductor, or by changing the circuit from series to parallel or the reverse; but as this usually requires permanent construction, it becomes necessary to have also some simple means by which a resistance of known amount can be properly introduced into any circuit or withdrawn from it without interference with the permanent construction: this is furnished by the *resistance coil*, or rheostat, as it is also termed.

Resistance Coils.—Resistance coils are made of german-silver wire on account of its high resistance, which is usually about seventeen times that of pure copper, and calibrated as to gauge and length for a given number of ohms resistance, the wire being properly wrapped for insulation. Fig. 73 gives an ideal view of the construction.

X, *Y*, and *Z* are short blocks of brass, insulated from each other above, but connected below through the coils *c* and *d*, as shown; each coil being wound with a double strand to reduce self-induction. Two brass plugs, *a* and *b*, having hard-rubber handles, fit into holes between the blocks, so that when placed as shown, the three blocks are in electric connection, and having practically no resistance, a current would pass directly through them, without traversing the coils. But if a plug, as *a*, is removed, the current between *X* and *Y* must then pass through the coil *c*.



Fig. 73.

In like manner if plug *b* is removed, the current between *Y* and *Z* must pass through the coil *d*; which, being twice the length of *c*, would have twice the resistance if made of wire of the same gauge, or four times the resistance if also the cross-section of the wire was one half that of *c*. In this way resistance can be varied to any practical extent required.

Sets of resistance coils, calibrated for resistance varying from 1 ohm or less to 10,000 or more, are conveniently arranged in cases, as shown in Fig. 73½. The

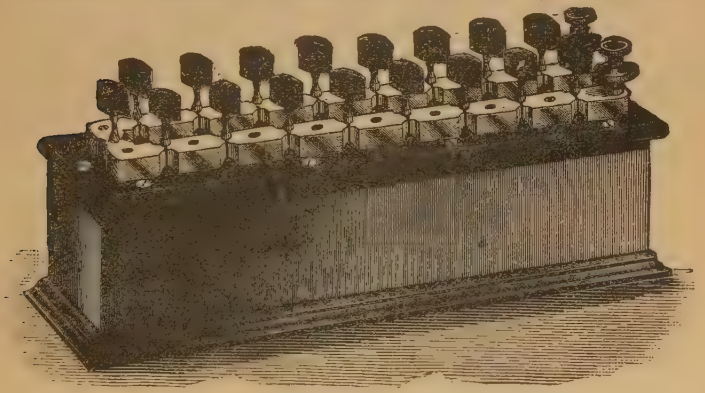

Fig. 73½.

case has a hard-rubber cover by which the brass blocks are insulated above, each pair being connected through a coil below, as shown in Fig. 73. A hole in the centre of each block receives each plug when removed from between the blocks, to prevent its being mislaid, and connection with the electric circuit is made through the binding-posts shown at the right.

To introduce any required resistance it is only necessary to remove the plug from its place between the blocks opposite which the resistance required is marked on the

cover, the other plugs all remaining connected. If, for instance, 1 ohm resistance is to be introduced, let the first plug at the front right-hand corner be removed, opposite which "1 ohm" is marked; the current must now flow through that coil, and pass by all the other coils, through the blocks and plugs; if 50 more ohms are to be added, the last plug at the rear left-hand corner is removed, opposite which is marked "50 ohms;" and the resistance then becomes 51 ohms.

THE STANDARD LIGHT UNIT.—The illuminating power of a lamp is determined by the photometer, by comparison with a standard unit of light. This standard varies in different countries. In France it is the Carcel lamp, in which pure colza oil is burned; the wick being 30 millimeters in width, and the flame 40 millimeters in height. The German standard is a paraffin candle, 20 millimeters in diameter, having a flame 50 millimeters in height. The English standard is a sperm candle, burning 120 grains per hour. The Paris Electric Conference of 1881 adopted as a standard unit the light radiated by a centimeter of pure melted platinum at the temperature of congelation. A platinum strip 5-6 millimeters wide is inclosed in a metal box having a conical opening of 1 square centimeter at its narrowest part, and is brought to the point of fusion by a battery current; the radiated light being just one-tenth that of the standard unit. A lamp or candle whose illumination has been determined by this unit, can be most conveniently used in practice.

THE BUNSEN PHOTOMETER. — Every photometer is constructed according to the well-known law, that the intensity of light varies inversely as the square of the distance; the light being received by the instrument at

a certain definite angle. Of the various instruments of this kind in use, the Bunsen is one of the simplest and most practical. A convenient style of this instrument consists of a narrow box about forty inches in length, with sliding shutters on one side: in it is placed a little screen of oiled paper mounted on a movable frame between two mirrors, at equal angles to both, so that an illuminated spot on the screen can be seen at the same time in both mirrors. This screen, with the mirrors, slides longitudinally, and can be moved to any required point on the central axis of the box, and inspected through an opening in the shutters. The standard light is placed in one end of the box, and the light to be measured in the other end, air holes being provided above each. The screen is then moved to a point where the intensities of the opposite lights, as seen by their reflected images in the mirrors, are equal, which requires careful adjustment till the variation in illumination is equalized. The exact distance of each light from the screen being shown on a graduated scale, the illumination of the light under measurement, as compared with the standard, is determined by the law given above. If the distance of an incandescent lamp from the screen is four times that of a standard candle, then the candle power of the lamp is $4 \times 4 = 16$ candle-power.

If an arc light is to be measured, the required distance from the screen being too great to admit of the use of the box, the measurement must be made in a darkened room of sufficient length.

CHAPTER VII.

The Arc Lamp.

Principles of the Arc Lamp. — The production of light and heat by the electric current depends primarily on the strength of the current, and on the resistance which it encounters; the development of heat in a conductor, according to Joule, being proportional to its resistance, to the square of the strength of the current, and to the time the current lasts. We have illustrations of this in the spark of the electric machine and in the lightning's flash, both of which result from the resistance of the air to the passage of electricity. Heat is always a result of this resistance, even in the best conductors, and precedes the production of light; but the resistance encountered in such conductors as copper and iron is not sufficient, except with currents of abnormal strength, to raise the molecular intensity to the degree requisite for the production of light. The case is analogous to that of the production of heat by friction, where heat development is in the inverse ratio of heat conductivity: friction between wooden surfaces rapidly produces combustion, the effect being, from want of conductivity, concentrated on the points in contact; while from the conductivity of metals the heat developed by the same amount of friction is distributed through the mass, and the temperature developed at the points of contact propor-

tionally reduced, the proportion depending on the conductivity of the metals. Similarly, what takes place on the surface in mechanical friction may be assumed to take place throughout the mass in the molecular action which we term electricity. And if, as we have assumed, electric conductivity depends on molecular arrangement, the internal friction between the molecules must be greater in an abnormal arrangement, such as may be assumed to exist in substances of low conductivity, than in the normal arrangement assumed to exist in those of high conductivity. Hence the choice of a substance having the proper proportions of conductivity and resistance combined with other necessary qualities becomes an important consideration in the construction of the electric lamp.

There are two methods of producing the light, one depending on the combustion of the light-producing substance, and the other on its incandescence; and these methods have given rise to two systems known respectively as the arc light and the incandescent light systems. The arc light is the oldest, and originated with Sir Humphry Davy in 1813; and it is remarkable that carbon, the substance in common use in the modern electric lamp, was the substance which he adopted in those early experiments; and the construction of the modern lamp has for its principal basis the same fundamental principles which he discovered and adopted. Passing a current furnished by a battery of 2,000 voltaic cells through two rods of common wood charcoal, placed end to end, he obtained, on slightly separating them, a light of intense brilliancy and heat, having the form of an arch, or arc of a circle; hence the term voltaic arc, designating both the origin and

form of the light, the latter word being still retained, while the former has fallen into disuse since the battery, as a generator for lighting purposes, has been superseded by the dynamo.

The contact of the carbons is necessary for the establishment of the current, and their subsequent separation for the production of the light. The ordinary current which maintains the light is not strong enough to pass through an air space of even $\frac{1}{10000}$ of an inch; but the current produced by the separation of the carbons after contact is far more powerful, resulting from the difference of potential caused by the sudden accumulation of energy on the positive side of the break, and the negative condition on the opposite side: a film of carbon is volatilized by this powerful current, and the space between the carbons filled with carbon vapor, which is a partial conductor of very high resistance. The combustion of this vapor, and of the carbons themselves by the union of oxygen, heats the air, and reduces its resistance, so that the current is maintained in this heated air and vapor at its normal strength through a resistance varying from ½ an ohm to 100 ohms, and across an air space of $\frac{1}{16}$ to ¾ inch. The light is of intense brilliancy, varying from 1,000 to 2,000 candle-power, being greatest on the surfaces of the carbon points, especially on that of the positive carbon; while the heat, which is also of great intensity, is greatest in the carbon vapor, and capable of volatilizing the most refractory substances, not excepting even the diamond.

The direct current is usually preferred for the arc light, and the vertical position for the carbons; the current passing from the upper to the lower carbon, as shown

in Fig. 74. The upper, or positive, carbon is consumed about twice as rapidly as the lower, or negative, carbon; and the exterior of both more rapidly than the interior; consumption increasing toward the tips, producing a cone on each, the lower pointed, and the upper truncated, with the formation of a crater at the tip. The light, being the

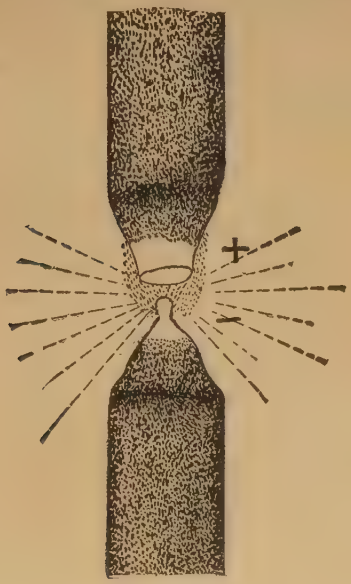

Fig. 74.

most intense on the upper carbon surface as stated, emanates chiefly from this crater, and is radiated downward: the amount thus radiated being equal to about sixty five per cent of the entire light produced. This is the principal reason why the direct current is preferred for arc lighting; illumination, except in special cases, being wanted below rather than above or in a horizontal

direction, especially from arc lights, which, from their intense brilliancy, and the powerful currents which they require, must be elevated for safety.

With the alternating current, both carbons are consumed at the same rate, and both retain the pointed form, which permits a free radiation of the light in nearly every direction. For lighthouse illumination, there is an advantage in this; and by reflectors and lenses, the light can be concentrated and intensified in a given direction. While there would seem to be an economical advantage in the equal consumption of the carbons by the alternating current, it has been ascertained by experiment that the carbon wastage is much less with the direct current.

In short arcs, particles of carbon and fused impurities are deposited on the lower carbon, forming the *mushroom tip* shown in Fig. 74, which is burnt off at the base and again renewed, as the consumption proceeds. This deposit does not occur in long arcs.

The flame assumes the form of an arc from the fact that the electric potential of the space between the carbons is much higher than that of its surroundings, including the air and external objects; consequently the incandescent vapor is repelled from this space by virtue of equality of potential within the space, and attracted outward by virtue of difference of potential between the space and its surroundings; and the flame being connected with the carbons above and below, the central part alone yields to this outward pressure, producing the arc.

Since the alignment of the carbons is not exact, nor the surfaces in contact perfectly flat, the flow of the

current before separation is liable to be through points at one side of the center; and after separation and the formation of the crater, the line of least resistance is evidently between the point of the lower carbon and the lowest point on the edge of the crater. The highest potential is evidently through the center of the flame, where the principal part of the current is flowing; and the outside potential being lower than the potential at any point between the carbons, the flame bends out to one side, instead of equally on all sides, and forms an arc; whereas, if the current were perfectly central, and the outward pressure perfectly equal on all sides, the flame would be a spheroid.

As each lowest point on the edge of the crater is consumed, and the distance, and consequently the resistance, is increased, the flame shifts to the next lowest point, and so travels round the edge of the crater while pivoted on the point of the lower carbon.

As an electric current can be attracted or repelled by a magnet, this flame-bearing current exhibits the same effects; and the arc can thus be increased or diminished by the approach of a magnet, and also be attracted by the approach of an unmagnetic body of different electric potential.

Arc Light Carbons. — As the efficiency of the electric light depends very largely on the carbons, it is of the highest importance that they should be properly prepared; hence not only the materials of which they are composed, and the methods used in their preparation, require careful consideration, but their length, diameter, conductivity, resistance, and other points, are also matters of the utmost importance in securing the best results.

As already stated, wood charcoal was the substance employed by Sir Humphry Davy; but this in its ordinary state is unsuitable, being soft, porous, and rapidly consumed, with a deflagration troublesome and dangerous: it therefore became necessary to find some form of carbon which would consume slowly, and give a steady, brilliant light. The carbon cut from the interior of gas retorts, was proposed by Foucault, and was found to fulfill these conditions to a certain extent; but its impurity, and lack of homogeneousness, interfered seriously with the quality and steadiness of the light, though, for want of something better, it was used in all the early experiments; but it became evident that carbons specially prepared for this purpose were required, and this requirement became the more imperative when electric lighting, by the invention of the dynamo, was made a commercial success. Various experiments by different European inventors finally resulted in the production in France of the carbons of Carré and Gaudoin, which were the first to fulfill approximately the required conditions of purity, homogeneity, proper resistance, and proper form.

Previous experiments in this direction by Lacassagne, Thiers, and others, had been made in 1857 and subsequently, by pulverizing and purifying the carbon, making it into a paste, molding and baking it. One of the early methods of Gaudoin was to use rods of wood charcoal, similar to those employed by Davy, infiltrate them with various hydrocarbons by repeated soaking and baking alternately till they had attained the necessary consistence as indicated by their metallic ring.

The Carré carbons, which still maintain a high standard of excellence, are now made as follows: Fifteen

parts of pure coke finely pulverized, and five parts of calcined lampblack, are mixed with seven to eight parts of a syrup made of cane sugar and gum arabic, in the proportions of thirty parts of sugar to ten parts of gum. The mixture is then pulverized, made into a paste with water, forced under heavy pressure into a die of the form required for the carbons, and baked repeatedly at a very high temperature. After each baking the carbons are immersed in a concentrated syrup of burnt sugar, maintained at a boiling temperature, so as to fill the pores with the sugar, the process being facilitated by intervals of cooling; and the superfluous syrup being washed from their surfaces with boiling water previous to each baking. When the required density is attained, the carbons are slowly dried for about fifteen hours at a temperature of about 170° C., and are then ready for use. Great tenacity is one of the good qualities claimed for these carbons, and they can be used in lengths of twenty inches without risk of fracture.

The Gaudoin carbons are made from carbon obtained by the destructive distillation, in closed graphite crucibles, of tar, bitumen, pitch, oil, and other substances; all foreign matter being expelled, leaving a residuum of nearly pure carbon.

This is reduced to a fine powder, made into a paste, and the carbons formed under a high pressure.

Napoli, another French manufacturer, makes his carbons from a coke obtained from the slow distillation of coal. This coke, after being pulverized and screened, is mixed with gas tar, in the proportion of seventy-five per cent of the coke to twenty-five per cent of the tar. The carbons, after being formed, are first baked at a

low temperature, not exceeding that at which the coke and tar were produced: after cooling they are baked again at a white heat, which removes all traces of gas, producing carbons of great hardness, ready for use without further treatment, which are said to give a steady, pure white light at a slow rate of consumption.

In the manufacture of the Liepmann carbons, made in London, the raw material is obtained from the distillation of mineral oil, which, it is claimed, contains only carbon and hydrocarbons, and furnishes carbons free from the impurities found in those made from coke, graphite, or retort carbon, which produce the colored tints and flickerings in the light, and the troublesome ash deposit. The material is soft and brittle, and easily pulverized. It is first ground to a fine powder, then baked, and subsequently mixed with a specially prepared tar, and the paste thus formed, molded into carbons. The molding is done under a pressure of about thirteen thousand pounds to the square inch, obtained from a hydraulic accumulator in connection with a steam-engine and pump. The carbon rod, squirted endways through a die, issues continuously upon a table moved on rollers; and, when a length of four feet is attained, it is cut into twelve-inch lengths by four knives carried in a frame. The carbons are then stacked, with carbon dust between the layers to prevent adhesion, dried in the air for several weeks, and then straightened by being rolled between boards, after having been sufficiently heated to render them plastic. Two kinds are prepared in this way, — the solid carbons, and the shells for cored carbons. These shells are closed at one end, and the cores injected by a small hydraulic press.

The baking, which is an exceedingly important and delicate operation, is done in gas-heated furnaces in which the heat can be kept under perfect control. The carbons, stacked upon an iron trolly, are slowly passed through the principal furnace, which has five zones of heat: they enter through the coolest zone, and emerge through the hottest, and then pass into an auxiliary furnace, the temperature of which is reduced very slowly. They are then finished by trimming the ends, and copper plating such as require it, and, after being tested for resistance, are ready for use.

The testing is accomplished by an automatic machine, electrically controlled, through which the carbons are passed; each one being momentarily inserted in a shunt to a solenoid. The required resistance of a carbon being about two-tenths of an ohm, if the resistance exceeds this, the carbon is held, carried forward, and dropped into the box of rejected carbons; but if the resistance is less, permitting a greater flow of current through the carbon, the current through the solenoid is reduced; and by means of a spring, which opposes the attraction of the solenoid, the carbon is released, and drops into another box.

The copper plating is accomplished by an apparatus having eight sliding frames, each carrying a row of spring clips by which the carbons are suspended, and under each frame a glass vessel containing dilute sulphuric acid in which a copper cylinder is immersed; this cylinder forms one of the electrodes; and the frame, when lowered and immersed in the liquid, forms the other. The current is furnished by a dynamo, which also supplies the current for the testing machine, connection being made by an automatic switch when the

frame is lowered; and the time required for plating is indicated by the color of the deposit.

In the United States the material now used in the manufacture of arc light carbons is petroleum coke, a residuum of the distillation of crude petroleum, which contains very little foreign matter that cannot be expelled by heat. This is ground and mixed with some hydrocarbon, generally gas-house pitch, and the mixture then ground again. It is then placed in steel molds of the proper form, twelve inches long, and heated sufficiently to render it plastic, after which it is subjected to a hydraulic pressure of from 3,000 to 8,000 pounds to the square inch; the amount of pressure depending on the purpose for which the carbons are intended. They are then baked at a high temperature for 24 to 100 hours, according to the style of furnace, and number of carbons placed in it. The crooked carbons are then culled out, and the straight ones electroplated.

It has been shown that the arc light is derived from incandescent carbon, and carbon vapor; also that, in the process of manufacture, various hydrocarbons are used, both in the original composition and in the subsequent process of infiltration, after which the carbons are again baked at a high temperature; the object of the infiltration being to produce density, and of the subsequent baking to reduce the hydrocarbons to pure carbon by expelling the other constituents.

It is found that the intensity of the light is in the direct ratio of the temperature of the arc; and, since pure carbon requires for its volatilization the highest temperature of any known substance, it is evident that this intensity depends on the purity of the carbon, any remaining foreign substance becoming volatilized at a

lower temperature, and interfering seriously with the intensity of the light. It is shown by the spectroscope that the whiteness and purity of the light depends, like its intensity, on the purity of the carbon; and it is also found that the resistance of the arc is in the same ratio; its resistance being at the maximum, and its conductivity at the minimum, with the maximum of purity in the carbon. The distance between the carbons, as will be shown hereafter, is regulated automatically by this resistance, being shortest when the resistance is greatest; and the consumption of the carbon is, at the same time, at the minimum. Hence it follows that the highest economy of consumption, and the best light is attained with the greatest purity of the carbon.

As the vapor resulting from the volatilization of foreign substances has higher conductivity than carbon vapor, there is often, with impure carbons, a sudden lengthening of the arc and reduction of the light, caused by the consumption of this foreign material, the carbons automatically adjusting themselves to the reduced resistance, and again returning to their normal distance, and the light to its normal intensity and purity, when the foreign matter is consumed; the net result being a flickering, unsteady light, varying from a short arc of intense brilliancy to a long colored arc of perhaps one-fourth the brilliancy, and returning again to the intense white arc.

Another serious defect is the lack of homogeneousness of structure, even with purity of material; the density at the ends may vary materially from the density at the center, producing an irregular rate of consumption; or dense carbon may be infiltrated throughout with soft carbon, the soft carbon consuming more rapidly, pro-

ducing numerous small craters, and leaving ridges of hard carbon, resulting in a noisy, inconstant light. Carbons molded by side pressure are less liable to the first defect — difference between the density of the ends and center — than those molded by end pressure, and subsequently cut into lengths; and the latter method has been generally abandoned in favor of the former in American factories, as it was found impossible to apply end pressure with proper uniformity. Carbons with the cores injected into shells of greater density, burn more rapidly in the center than at the edges; and hence the form of the crater is more perfect, and the liability to the second defect — small craters surrounded by hard ridges — is greatly reduced. This defect can also be overcome by proper care in the preparation of the paste.

Carbons require to be perfectly straight and cylindrical, and of perfectly uniform diameter from end to end; and those of the length required for the usual long periods of continuous consumption are liable to defects in one or more of these respects in the various processes of manufacture. Good contact with the carbon holders, and proper alignment of the two carbons, is impossible with those of defective form; and such carbons are a constant source of annoyance, no matter how great their excellence as regards purity and density.

The electric resistance of the carbons is also a point of the highest importance, especially on a circuit having a large number of arc lamps in series; and here again the purity of the carbons becomes important, for while the resistance of the incandescent vapor which constitutes the arc increases with the purity of the carbon, as has been shown, the resistance of the carbons themselves diminishes; the purest and densest carbons having the

lowest resistance. Plating with copper, iron, or nickel, for the purpose of reducing resistance, has been tried with varied success, also embedding iron wire in the center of the carbons. The principal objection to copper plating is, that with the direct current, the carbon of the negative rod is consumed more rapidly than the copper, leaving a copper fringe which casts a shadow; but, notwithstanding this objection, it is generally adopted as the best means of reducing resistance. Carbons for lights not exceeding 1,200 candle-power do not require plating, while those for lights of 2,000 candle-power and upwards are always plated.

The ordinary length of carbons, as already stated, is 12 inches; but the diameter varies according to the strength of current and candle power of the light for which the carbons are intended, ranging from $^{7}/_{16}$ inch with a 6.8 ampere current, and a 1,200 candle-power light to $^{9}/_{16}$ inch, with a 15 ampere current and a 3,000 candle-power light. For a 2,000 candle-power light with a 10 ampere current, the diameter of the carbons is $^{7}/_{16}$ to $^{8}/_{16}$ inch; while for exceptionally powerful lights, such as are required for lighthouses, and search lights on steamers, carbons exceeding an inch in diameter are required.

The principle which underlies this is the ratio of molecular action to the mass of the carbon. If the mass is too small for the amount of current, the molecular action is too much concentrated, and the carbon either wastes away by becoming heated through from end to end, or there is an imperfect formation of the crater, the edges consuming too rapidly, allowing upward radiation, and consequent practical loss of light. But if the mass is too large for the current, the molecular action

is too much diffused, producing a dull red light in the outer portions of the carbons instead of an intense incandescent glow; the point of the lower carbon also becomes too obtuse, causing too great lateral radiation, and a broad shadow underneath. With the proper proportions between the amount of current and the diameter of the carbon, the increase of light is in the direct ratio of increase of diameter; powerful lights requiring carbons of large diameter, while smaller lights require those of less diameter.

The Jablochkoff Electric Candle. — Among the earlier methods of producing the electric light was the candle invented by Jablochkoff, a Russian military officer, in 1872, about five years subsequent to the invention of the Gramme dynamo; and its use had been continued up to a comparatively recent date, 2,500 of these candles being used in Paris for street lighting as late as 1880; and though finally superseded by better methods, it will always possess a historical interest on account of its success and popularity in the early history of electric lighting.

Its construction is exceedingly simple, consisting of two carbon rods, each about 8.33 inches in length, and $^1/_6$ inch diameter, mounted vertically, side by side, on a base, at about $^1/_{16}$ of an inch apart, and insulated from each other by a composite substance, of which kaolin — porcelain clay — is the principal ingredient; which also forms an attachment between the carbons, and produces the effect of the lime light as it consumes in connection with them. The candle thus formed is supported on the base in a double spring clip through which the current enters, passing up one carbon and down the other, the upper extremities being connected

by a strip of graphite or other carbonaceous substance, which acts as a primer through which the current passes to establish the arc, and is consumed in the process, the current being subsequently maintained through the arc in the usual manner; hence if, through accident, the light becomes extinguished, it cannot renew itself.

As equal consumption of the carbons is an absolute necessity with this candle, it can be used only with the alternating current. Each candle lasts about an hour and a half; and lamps are constructed containing several candles, and furnished with apparatus by which the current can be changed automatically from a burnt-out candle to a new one, each having a separate connecting wire; while one common wire is used for the return current. Hence a lamp containing six candles furnishes light for nine hours.

The required horse power on a circuit of five candles is 1.57 per candle, with ten candles 1.27, and with twenty candles .92; and the illumination of each light, without globe, 400 candle-power. It is evident that since the crater of the positive carbon, as well as the point of the negative, faces upwards, there must be, with this system, a great waste of light from direct upward radiation. The incessant variations of tint and brilliancy in the light, and the noise produced by the alternating current, has of late aided to bring this system, once so popular, into disrepute.

THE JAMIN ELECTRIC CANDLE. — The loss of light from upward illumination with the Jablochkoff candle, and the lack of means for relighting automatically when accidentally extinguished, led to the invention of electric candles free from these defects, among which

we find the Jamin candle, which is represented by Fig. 75.

Two carbons, k k_1, $^1/_5$ inch diameter, are suspended point downwards, and surrounded below by a flat copper coil inclosed in a light case of copper foil, g g g g, which is attached to an insulating slate, p p, through which the carbons pass. The carbons are inclined at a slight angle so as to bring their points together, k being fixed, while k_1 is movable, and connected with a spring armature f by a pin s; the armature being attached to the case below, and slightly separated from it above. The coil is included in the electric circuit with the carbons; and when the current passes, the armature f is attracted, and k_1 separated from k by the pin s a sufficient distance to form the arc; the carbons, as consumed, being lowered by a wheel train inclosed in the tube shown above. Should the light become extinguished, the current being interrupted, the attraction of f ceases, and the retractile force of the spring brings the points of the carbons together, and renews the arc. A glass globe attached to p p incloses the lower part of the apparatus.

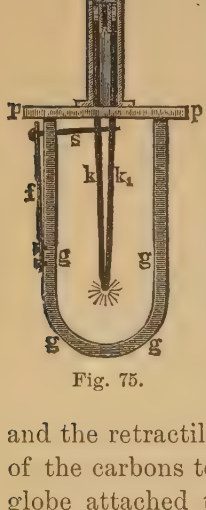

Fig. 75.

A pair of carbons lasts about two hours; and lamps are constructed with several pairs, and an arrangement by which, as each pair burns out, it consumes a fine brass wire which releases a spring by which the current is instantly changed automatically to the next pair; so that lamps constructed with three candles burn

continuously for six hours without attendance. This candle, like the Jablochkoff, requires the alternating current.

THE SUN LAMP. — This lamp, invented by Clerc and Bureau, is illustrated by Fig. 76, and combines in its construction the arc and incandescent systems. To a metal frame g g is attached a block of marble or condensed magnesia, M M M, ⅜ to ¾ inch thick, through which the carbons k k are transmitted, and by which

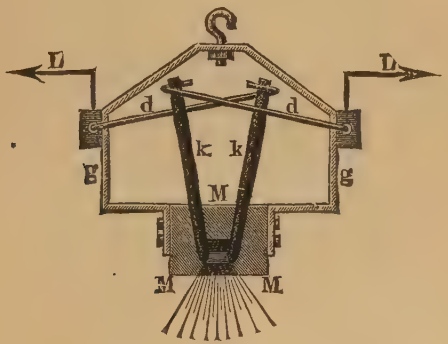

Fig. 76.

also they are insulated; the form of the opening through which they pass being so shaped that as they slide down by their own weight, or that of weights attached above, as they are consumed, they are prevented from passing through; their points entering a cavity in which the light is produced.

They are attached above to the conductors d, d, insulated as shown, and connected with the electric circuit L, L. A primer, connecting the points of the carbons, establishes the arc; after which, current is maintained through the block, which becomes a conductor by being

heated between the carbon points. The arc is of exceptionally great length, varying from .39 of an inch to 2.36 inches, while, in the ordinary arc lamp and Jablochkoff candle, it is only $^1/_{16}$ to $^1/_8$ of an inch in length. The luminous point is fixed, and the light remarkably steady. It has a yellow tint when marble is used, and is of great intensity; the light being largely due to the incandescence of the lime formed from the marble, while the magnesia block produces a white light. Marble blocks last for two lighting periods of about ten hours each, the durability being reduced by the heating and cooling with shorter periods. The carbons vary in length from two to twelve inches, and last about fifteen hours.

The blocks vary in thickness, according to the requirements of the light, being made thinner for short circuits and strong currents than for long circuits and currents of less volume and greater intensity. Those made of condensed magnesia are more durable than those made of marble, being capable of lasting a hundred hours.

The alternating current is preferred for this system, the lamp being closed to suppress the noise. The light is radiated downwards; but upward or horizontal radiation can also be obtained, springs being used to push the carbons. In another form of the lamp the carbons are placed horizontally, and have a special device for automatic relighting. The system is said to be economical, and the light, depending largely on the incandescence of the marble or magnesia, but slightly affected, even by considerable variations of current strength.

Automatic Adjustment of Arc Light Carbons. — The automatic adjustment of the carbons is the main

point in arc lamp construction, as upon this depends the production of the light, its renewal in case of extinction, and, to a considerable extent, its constancy and steadiness. This adjustment, consisting in separation and approach of the carbons, is operated and controlled by the electric current which creates the light, by various methods, as a train of clockwork, a break wheel or clutch operated by an electro-magnet, or a solenoid. The applications of these methods are numerous, and have led to the invention of a great number of different lamps. If the adjustment of the carbons in a single lamp were the only requirement, the problem would be comparatively easy; but the placing of a large number of lamps on one common circuit, and so regulating the resistance and the supply of current that each shall furnish an even, steady light, without interfering with the others, is a far more intricate and difficult affair. This regulation of a number of lamps on a common circuit is accomplished by the method originally proposed by Hefner von Alteneck, by which the regulating apparatus is placed in a shunt instead of in the main circuit; the shunt, which has a high resistance, causing the approach of the carbons, while their separation is produced by a coil of low resistance placed in the main circuit.

The length of the arc is a very important matter. If too long, the intensity of the light, as well as its constancy and steadiness, is reduced, and the resistance abnormally increased. If too short, there is a decrease of intensity from insufficient resistance, and a wastage of the current from too great conductivity, the light obtained being less than the current can furnish. The length of the arc must also be adjusted to the amount

of illumination for which the lamp is intended; and it is found, that, for lamps of 1,200 candle-power, the most practical length is about $^1/_{16}$ of an inch; while, for those of 2,000 candle-power, it should be about $^1/_8$ of an inch.

THE FOUCAULT-DUBOSCQ LAMP. — The first arc lamp with automatic regulation was invented by Foucault, and subsequently improved by Duboscq, and was constructed with clockwork, operating by gearing; two vertical racks being connected with the carbon holders, and controlled by an electro-magnet and opposing spring in such a way, that, while the spring tended to bring the carbons together, the current which produced the light, passing through the electro-magnet, attracted an armature which tended to separate them, the carbons being placed vertically. The clockwork was operated by springs which required to be wound like those of a clock. Either the constant or alternating current could be used, the feeding forward of the positive carbon being proportional to its increased consumption with the direct current.

THE SERRIN-LONTIN LAMP. — The construction of this lamp, invented by Serrin, and improved by Lontin, will be understood from Fig. 77.

The carbons, not shown, are placed vertically in the usual manner, and connected above with the holders n and h_1 h_2, the upper + carbon with n, and the lower — carbon with h_2 which moves vertically inside of h_1. A rack connected with n engages a gear wheel r to which is attached a wheel s, with which is connected a chain which passes over a pulley, and is attached to a support t, connected with the holder h_2; hence, as n descends by its weight, it raises h_2, and the carbons approach each other.

A frame, *a b c d*, hinged at *a* and *c*, but having a free vertical motion at the side *b d*, is connected with the clockwork by the gear wheel r_1, and kept in equilibrium by three spiral springs, two below and one above a transverse bar connecting it with the support *t*. A detent *z*, attached to this frame, releases the gear wheel *r*, permitting the motion of the clockwork, which brings the carbons together as described, in consequence of which a slight lowering of the frame occurs, and the detent *z* stops the clockwork. An electro-magnet *e*, placed in circuit with the carbons attracts an armature *a*, connected with the frame, when the current passes, drawing down the frame and the holder h_2 connected with it, separating the carbons, and establishing the arc. If the arc becomes abnormally long, the increased resistance reduces the current, and lessens the attraction of the armature, the springs raise the frame, pushing up the lower carbon, and the detent being at the same time released, the clockwork is put in motion, and the carbons brought closer together. By this series of adjustments the arc is maintained at its normal length. By a screw s_1 the pressure of the lower springs is so adjusted as to produce the requisite equilibrium. By a proper

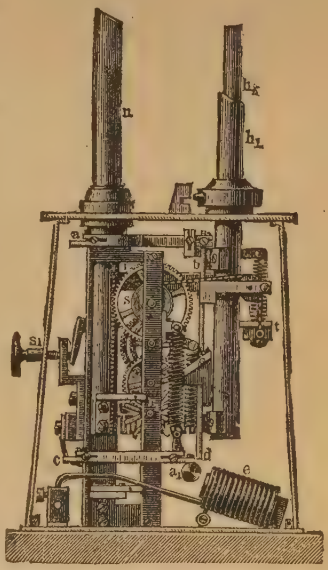

Fig. 77.

adjustment of the gear wheel r and the wheel connected with it, the arc is adjusted to the required length. The current may be either direct or alternating.

THE BRUSH ARC-LIGHT LAMP. — Among the numerous excellent arc-light lamps which have been constructed, the Brush may be selected as an example of simplicity, and adaptation to the purpose for which it was designed.

Fig. 78 is an ideal illustration of the construction, from which it will be seen that the adjustment of the

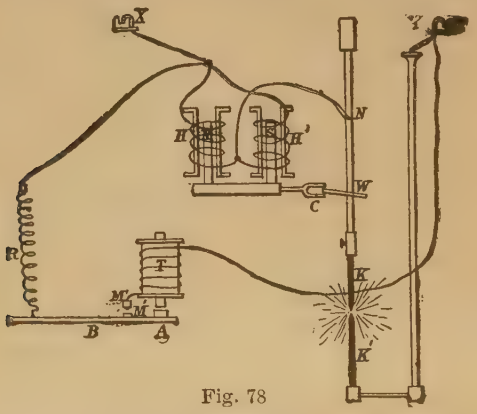

Fig. 78

carbons depends solely on the attraction of a solenoid, without the intervention of clockwork or gearing. X and Y are the terminals of the electric circuit, K and K' the carbons; the lower carbon holder, connected with Y, has a fixed position; while the upper holder, connected with X, is free to move vertically. This movement is produced by the solenoids H, H', each of which is wound with coarse copper wire, and placed in the main circuit by connections at X and Y. At the right of X are shown three branches, one extending

to a resistance coil *R*; and the other two, after being coiled round the bobbins *H*, *H'*, re-unite, as shown, and connect with the upper holder at *N*, the connection with *Y* being through the carbons *K*, *K'*.

A shunt of fine copper wire, not shown in the cut, is connected directly with the terminals *X* and *Y*, so that the current through it does not pass through the carbons. This shunt is coiled round the bobbins *H*, *H'*, outside of the coarse wire, but in reverse order, so that the current passes through it in the opposite direction, thus partially neutralizing the magnetic effect of the current traversing the coarse wire. The shunt, having a high resistance, carries about one per cent of the entire current; but its coils being much more numerous than the low resistance coils, their magnetic effect is proportionately increased.

The carbons being in contact at the start, and the main current passing through them and through the low resistance coil, the cores of the solenoids are attracted, lifting the clutch *C*, which grips the edge of the loose washer *W*, which being tilted at an angle, as shown, grips the upper holder, and lifts the carbon *K*, forming the arc. The separation of the carbons increases the resistance in the main circuit, and in like proportion the potential difference, or E. M. F., and hence the strength of the shunt current, which by its opposition to the main current reduces the magnetic attraction, and checks the ascent of the upper carbon when the arc has attained its normal length. A reduction of resistance reverses these results, increasing the distance between the carbons. Thus, by the action of these opposing currents, the normal length of the arc is maintained; and this normal length may be adjusted

as required, by varying the relative resistances of the two circuits when the lamp is constructed; so that it can be maintained at one-sixteenth of an inch, one-eighth of an inch, or any other length required by the candle power of the lamp. If a lamp becomes accidentally extinguished, the relative change of resistance in the two circuits operates to bring the carbons together, and the light is instantly renewed. Sudden fluctuations in this series of adjustments, which would produce a flickering, unsteady light, are obviated by connecting the armature of the solenoid and the upper carbon holder with pistons moving in tubes filled with glycerine, by which smoothness and steadiness are imparted to the movements.

Fig. 78 shows also a short-circuiting apparatus by which, in case of a lamp from any cause becoming permanently extinguished, it is short-circuited, so that the flow of current to other lamps on the same circuit is not interrupted. This apparatus consists of a resistance coil R, and an electro-magnet T, wound with coarse wire, placed in a direct open circuit between the terminals X and Y, as shown, through the hinged lever B and armature A. In addition to this open circuit, there is also a closed circuit of fine wire, wound on the bobbin T, in the same direction as the coarse wire, and forming part of the fine wire shunt of the solenoids H, H'. The ordinary current through this shunt, by which the lamp is regulated, is not sufficient to attract the armature A; but if the lamp should happen to be permanently extinguished, the resulting increase of current strength attracts A, and closes the coarse wire circuit through the contacts M, M', so that the main current flows past the extinguished lamp to the other lamps on the same circuit.

By adapting the resistance of R, and the windings of the bobbin T, to the strength of the current, the requisite adjustment can be obtained.

The carbons, twelve inches long, last about eight hours, about three-fourths of the positive carbon and one-third of the negative being consumed. The lamps are usually constructed with either one or two pairs of carbons, but can be made with three or more pairs if necessary; and, by the simple device shown in Fig. 79, each pair is lighted in succession automatically when the pair previously lighted has burnt out. The frame

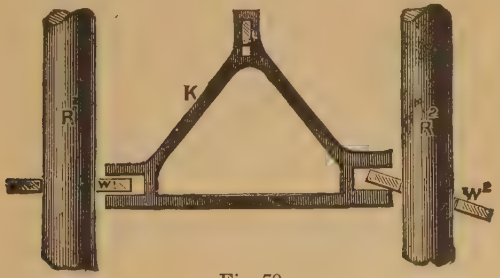

Fig. 79.

K, which is connected with the solenoids, is adapted to two pairs of carbons. The clutch on the left is narrower than the one on the right; it consequently grips the washer W^1 and lifts the carbon-holder R^1 before the right clutch can grip W^2 and lift R^2; the current, which at first passes equally through both pairs of carbons, is now, in consequence of the separation of the left pair, diverted through the right pair alone; the frame continues to rise, the right pair are separated and the arc established.

The separation of the left pair is too great to admit of the formation of the arc; but when the right pair is so

far consumed that the light is extinguished, and they can no longer be brought together for relighting, the left pair is brought into contact, and the arc re-established automatically, less than a second being required

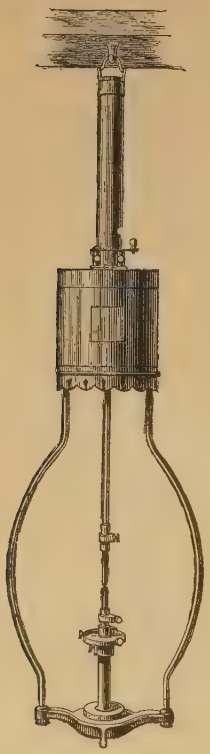

Fig. 80.

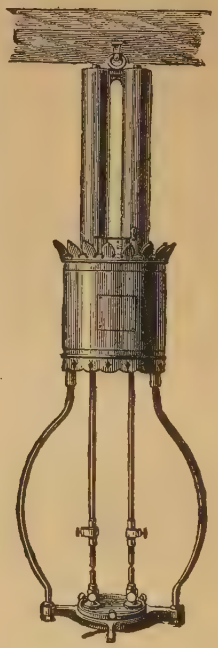

Fig. 81.

to renew the light. Fig. 80 represents a single lamp, and Fig. 81 a double lamp; the controlling and regulating apparatus being inclosed in the circular case above the carbons.

The solenoid and clutch method of automatic regulation, variously modified, is now employed in numerous arc lamps besides the Brush; the method with clockwork, or gearing, is also in common use; and the two methods are also sometimes combined.

In the consumption of arc-light carbons, cones of half to five-eighths of an inch in length are maintained on both carbons, that of the lower carbon being pointed, while that of the upper carbon is truncated, the crater occupying about one-third of the diameter. As these cones are incandescent, light is radiated from a space, including the arc, of an inch or more in length, while the actual distance to which the carbons are separated is only one-sixteenth to one-eighth of an inch: the incandescence of the upper + carbon is more intense, and yields much more light, than that of the lower — carbon.

CHAPTER VIII.

The Incandescent Lamp.

While the arc lamp is well adapted for lighting large areas requiring a powerful, diffused light, similar to sunlight, and hence is suitable for outdoor illumination, and for workshops, stores, public buildings, and factories, especially those where colored fabrics are produced, its use in ordinary dwellings, or for a desk light in offices, is impractical, a softer, steadier, and more economical light being required. Various attempts to modify the arc-light by combining it with the incandescent were made in the earlier stages of electric lighting, among which was the sun lamp already described; besides this, Reynier's lamp, invented in 1877, was the most successful. Its construction is briefly as follows: —

Reynier's Lamp. — A carbon rod impinges on the circumference of a circular block of carbon which has a rotary motion on its axis. The rod, 12 inches long and $^1/_{12}$ of an inch in diameter, is attached by a horizontal support above to a brass holder which has a free vertical motion in a brass tube placed on a level with the carbon block, and by its weight keeps the rod as it is consumed in contact with the block. The rod is guided in its descent between a small copper roller on one side and a short pointed carbon on the other, the current entering the rod through this point at about

$^1/_4$ of an inch above its contact with the carbon block, so that this short portion becomes incandescent, and produces the light. A brake connected with the carbon-holder and block by a horizontal support regulates the descent of the carbon rod; and the rotation of the block, produced by the pressure of the rod as it descends and is consumed, removes the ash and slag. A rod lasts about two hours, and furnishes a light of 114 to 150 candle-power. But the ratio of light produced to electric energy consumed does not exceed $^1/_6$ of that produced by the arc light, and the carbon rod is liable to break and extinguish the lamp.

Various improvements in this lamp have been attempted, such as the substitution of a copper block for the carbon block, also of shorter and thicker rods, less liable to fracture, and of several rods lighted automatically in succession, also of springs or clockwork for gravity in maintaining the contact of the carbons; but none of these semi-incandescent lamps have come into general practical use, though their efficiency in proportion to electric energy consumed was greatly increased above that of the Reynier lamp, so that an efficiency three times as great in proportion to consumption of energy as that of the strictly incandescent lamp, is said to have been attained; and it is possible that such efficiency may ultimately be attained as to bring this system into general use.

Early Experiments. — The first strictly incandescent lamp was invented in 1841 by Frederick de Molyens of Cheltenham, England, and was constructed on the simple principle of the incandescence produced by the high resistance of a platinum wire to the passage of the electric current. In 1849 Pétrie employed

iridium for the same purpose, also alloys of iridium and platinum, and iridium and carbon. In 1845 J. W. Starr of Cincinnati first proposed the use of carbon, and, associated with King, his English agent, produced, through the financial aid of the philanthropist Peabody, an incandescent lamp having twenty-six lights, which attracted the attention and excited the admiration of Faraday. The advantages of carbon over platinum consist in its greater electrical resistance, which is two hundred and fifty times that of platinum; its absolute infusibility, even at very high temperatures; its lower thermal capacity, by which the same amount of heat produces a much higher temperature; and its greater illuminating power at the same temperature as platinum.

In all these early experiments, the battery was the source of electric supply; and the comparatively small current required for the incandescent light as compared with that required for the arc light, was an argument in favor of the former; twelve Bunsen elements being sufficient to produce twelve incandescent lights in one circuit, as demonstrated by DeChangy of Paris, in 1857, while twenty-four to forty elements were required to produce a single arc light. Still, no substantial progress was made with either system till the invention of the dynamo resulted in the practical development of both systems, that of the incandescent following that of the arc.

Among the first to make incandescent lighting a practical success were Sawyer & Man of New York, and Edison. For a long time, Edison experimented with platinum, using fine platinum wire coiled into a spiral, so as to concentrate the heat, and produce

incandescence; the same current producing only a red heat when the wire, whether of platinum or other metal, is stretched out. A metal rod, placed inside the coil, was so arranged that when the temperature approached the point where the coil was liable to fusion, the expansion of the rod closed a short circuit, which reduced the current strength, and consequently the temperature: the contraction of the rod produced by the cooling, opened this circuit, and increased incandescence followed.

Failing to obtain satisfactory results from platinum, Edison turned his attention to carbon, the superiority of which as an incandescent illuminant had already been demonstrated; but its rapid consumption, as shown by the Reynier and similar lamps, being unfavorable to its use as compared with the durability of platinum and iridium, the problem was, to secure the superior illumination of the carbon, and reduce or prevent its consumption. As this consumption was due chiefly to oxidation, it was questionable whether the superior illumination were not due to the same cause, and whether, if the carbon were inclosed in a glass globe, from which oxygen was eliminated, the same illumination could be obtained. Another difficulty of equal magnitude was to obtain a sufficiently perfect vacuum, and maintain it in a hermetically sealed globe inclosing the carbon, and at the same time maintain electric connection with the generator through the glass by a metal conductor, subject to expansion and contraction different from that of the glass, by the change of temperature due to the passage of the electric current. Sawyer & Man attempted to solve this problem by filling the globe with nitrogen, thus preventing combustion by

eliminating the oxygen, and at the same time maintaining a pressure equal to that of the external atmosphere, so that the leakage by the expansion and contraction of the metallic conductor would be insignificant.

The results obtained by this method, which at one time attracted a great deal of attention, were not sufficiently satisfactory to become practical; and Edison and others gave their preference to the vacuum method, and sought to overcome the difficulties connected with it. The invention of the mercurial air pump, with its subsequent improvements, made it possible to obtain a sufficiently perfect vacuum, and the difficulty of introducing the current into the interior of the globe was overcome by imbedding a fine platinum wire in the glass, connecting the inclosed carbon with the external circuit; the expansion and contraction of the platinum not differing sufficiently from that of the glass, in so fine a wire, as to impair the vacuum.

INCANDESCENT-LIGHT CARBONS. — The next point of greatest importance was to obtain carbons of the proper consistence, tenacity, and durability; and this, as in the case of arc-light carbons, required a long series of delicate and costly experiments with a variety of materials, treated by a variety of different processes.

THE EDISON CARBONS. — The carbons made by Edison under his first patent in 1879, were obtained from brown paper or cardboard, cut into narrow strips in the form of a horse-shoe, which was about $2\,{}^{1}/_{4}$ inches long, and $1{}^{1}/_{2}$ inch in diameter. These were reduced to carbon in an iron mold placed in a muffle, and maintained at a high temperature. They were very fragile and short-lived, and consequently were soon abandoned. In 1880 he patented the process which,

with some modifications, he still adheres to. In this process he uses filaments of bamboo, which are taken from the interior, fibrous portion of the plant. The cane, after being cut into sections of the required length, and the hard outer surface removed, is split and shaved down into flat strips, which are then pressed between dies, and fine filaments of the required length and diameter obtained. These are placed in molds made of nickel, in grooves of the required horse-shoe form, and closed so as to exclude the air. The molds are then placed in muffles, and the filaments carbonized at a very high temperature. They are then attached to their platinum wire supports by electro-copper-plating, and introduced into the little lamp globes. The lamp is then attached to a Sprengel airpump, and during the process of exhaustion the filament is alternately heated and cooled by an electric current; the temperature being gradually raised by increase of current strength after each cooling, till a high degree of incandescence is attained. This removes all the occluded gases which remain after the carbonizing, and renders the carbon homogeneous, elastic, and refractory at a high degree of temperature. As this is a far more severe test than any to which the carbon will be subjected in use, all imperfect and defective carbons are destroyed in the process, and only the best survive.

The Lane-Fox Carbons. — In the manufacture of the Lane-Fox carbons the raw material is obtained from the bass broom, a species of grass fiber. The hard outer surface is removed by immersion in a solution of hot caustic soda or potash, and subsequent scraping, after which the alkali is removed with boiling water, and the fibers, in lots of about a hundred,

bound to blocks of plumbago, shaped so as to give them the horse-shoe form. These blocks, in lots of fifty, are imbedded **in powdered charcoal in graphite** crucibles, placed in a furnace, and subjected for twenty minutes to a white heat. The fibers, after being carbonized in this manner, are gauged and sorted, and all of the same diameter placed together, after which they are suspended separately from spring clips by attachment at the ends, in large globes filled with a hydrocarbon gas obtained from benzole or coal, and subjected to the process termed flashing, first proposed by Sawyer. This process consists in rendering the filaments incandescent, either by the passage of an electric current, or by the heat of a furnace, the latter being the method adopted in the Lane-Fox process. The gas in contact with each filament being decomposed, a layer of hard carbon is deposited, which renders the filament denser, smoother, more homogeneous, more durable, and more uniform in size; the smaller parts becoming hotter than the larger, and thus acquiring a thicker deposit. The increased diameter reduces the resistance, and the process is continued till the resistance required for lamps of a given candle-power, ranging from sixteen to sixty, is obtained.

THE CRUTO CARBONS. — These are made by using as a base a fine platinum wire bent into the horse-shoe form, upon which the carbon is deposited by the flashing process. This is effected by attaching the wires, placed in a long glass vessel, to insulated metallic supports, by which an electric current can be sent through each of them. A current of olefiant gas, $C_2 H_4$, circulates through this vessel, the gas being made from alcohol and sulphuric acid, purified by passing through

water and lime water, and dried by calcium chloride and sulphuric acid, thus furnishing a gas of pure hydrocarbon. The platinum wires are connected with a shunt circuit so that an electric current passing through them can be graduated to any required strength by a resistance varying from one ohm to two hundred ohms. The wire being heated to incandescence in this manner, the gas is decomposed, and carbon deposited. To insure a uniform deposit, it is necessary to guard against the influence of the earth's magnetism by placing the wires in a plane at right angles to that indicated by the dip of the magnetic needle; and in the latter part of the process the current is reversed. This operation, which requires about two and a half hours, produces a filament remarkably compact and homogeneous, and uniform in cross-section and resistance. Special care is required to maintain uniformity in the successive stages of the process, otherwise the result is a filament of dissimilar superimposed layers of carbon, lacking homogeneity, and practically worthless.

THE SWAN CARBONS. — These carbons are made from cotton twine, prepared by immersion in sulphuric acid diluted with one-third part water, by which they attain a consistence similar to that of parchment; they are then thoroughly washed to remove the acid, reduced to a uniform cross-section by being passed through discs, after which they are wound on rods of carbon or earthen ware, each in the form of a flat spiral having one convolution, and carbonized by being imbedded in powdered charcoal in a crucible raised to a white heat. They are subsequently coated with carbon by the flashing process, and, like the Edison carbons, heated and cooled alternately by the electric current to remove

the occluded gases, while inclosed in the globe during its exhaustion. Each filament, when finished, is 5 inches long and .005 of an inch in diameter.

THE WESTON CARBONS. — The raw material used for these carbons is cotton or linen cellulose, which by the action of nitric and sulphuric acids is converted into nitro-cellulose — gun cotton — which is subsequently dissolved in a mixture of alcohol and ether and converted into collodion, and finally has its combustibility reduced by the action of ammonium hydrosulphide or other chemical agent producing a similar effect.

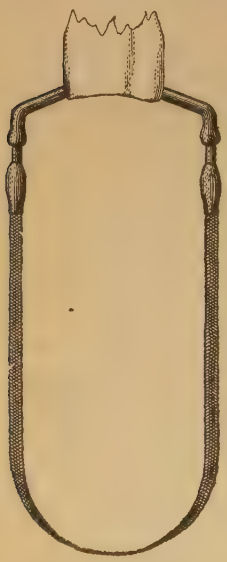

Fig. 82.

This artificial product, which Weston calls "Tamadine," is an amber-colored, amorphous cellulose of great ductility, tenacity, and homogeneousness. It is rolled into thin sheets between steel rollers, and filaments of the sizes required for lamps of different candle-power are cut from the edge of the sheet, bent on shapes into the horse-shoe form, carbonized in the usual manner, and flashed in hydrocarbon gas by the electric process. The carbons when finished are highly elastic, and have a smooth brilliant surface like that of a steel watch-spring.

THE BERNSTEIN CARBONS. — These are made from silk ribbon of the finest texture, woven into a hollow cylinder of the required size, from which sections of the proper length are cut, which are immersed in a thick

syrup of cane sugar till saturated, and subsequently in melted paraffine; they are then bent on shapes into the horse-shoe form, placed in graphite molds of the same shape and imbedded in graphite powder, and baked for twenty-four hours. The subsequent flashing process is the same as that for the Lane-Fox carbons. This fila-

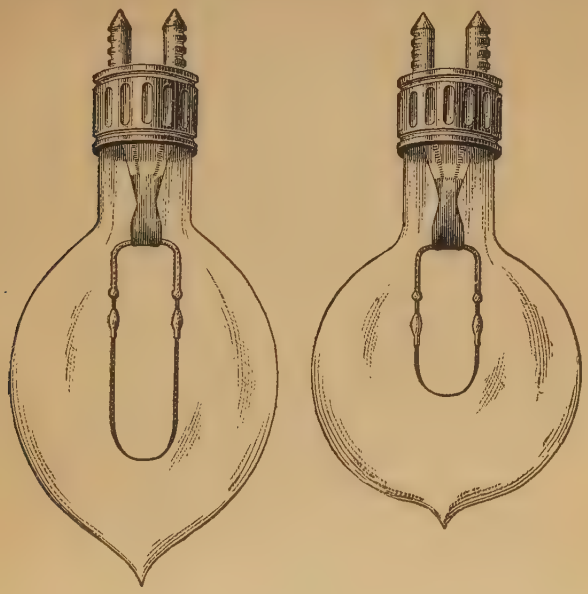

Fig. 83.

ment showing the woven structure, is illustrated by Fig. 82, and two of the lamps by Fig. 83, one with a short filament, giving it low resistance, and the other with a long filament, giving it high resistance.

These are the only carbons made from an animal substance, and with a hollow structure; and the advantage claimed for this structure is increase of surface,

and consequently of radiating capacity with a given degree of resistance.

General Details of Filament Construction. — More or less of the details of the various processes of manufacture are trade secrets, as in the case of arc-light carbons; and in some instances the whole process is kept secret, as in the manufacture of the Siemens-Halske and also of the Woodhouse-Rawson carbons.

As the length and diameter of the filament determines to a great extent its electric resistance and illuminating power, it varies according to the E. M. F., current, and kind of carbon employed, so that exact figures can not be given. The Swan filament, as we have seen, is about 5 inches long and .005 of an inch in diameter, and may be taken as representing approximately the average dimensions required for the ordinary 16 candle-power lamp.

The shape of the filament varies, the horse-shoe form being the most common; the Swan filament, adopted also for the Brush lamp, is a flat spiral, as already mentioned, while the Maxim resembles a capital M with the angles rounded off. The Sawyer-Man filament resembles a figure 8. Fig. 84 shows an Edison lamp, and Fig. 85 a Weston, both with horse-shoe filaments; and Fig. 86 a Weston with corrugated filament.

The cross-section of the filament is also a point of considerable importance, determining not only its strength in resisting jars, concussion, and high temperature, but also its illuminating power. As the rectangular form gives greater surface than the circular with the same cross-section, the illumination with a given length is greater, but this can be compensated in the circular form by increasing the length; this increases

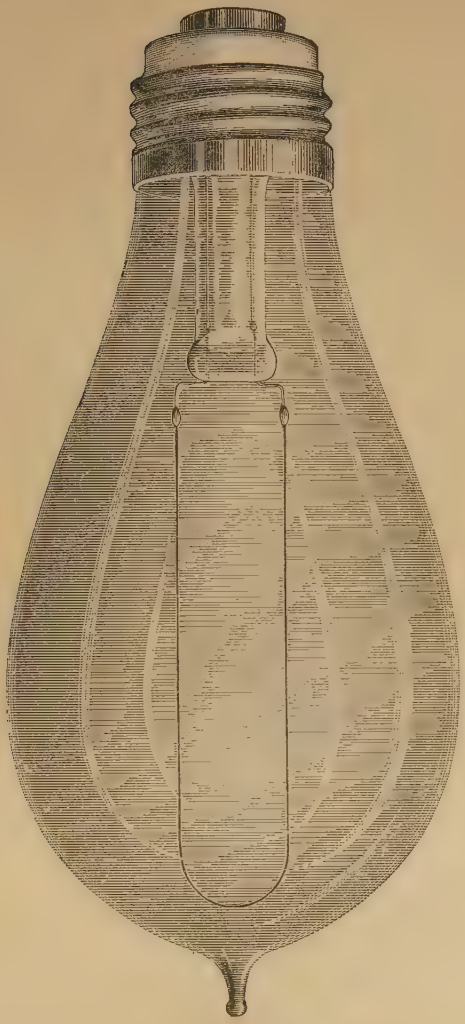

Fig. 84.

the resistance, and consequently the E. M. F. without increase of current. Hence the same illumination can be obtained from the round filament as from the rectangular with greater economy of current. The hollow circular filament, like the Bernstein, gives the maxi-

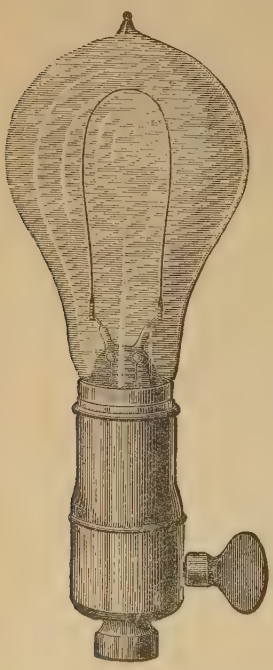

Fig. 85.

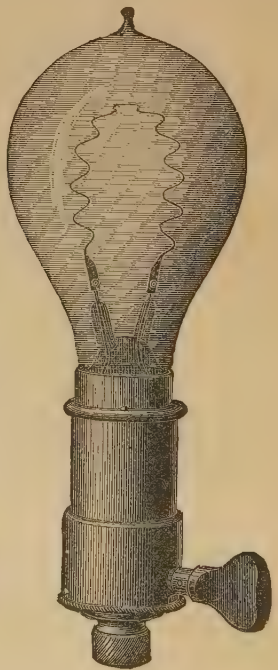

Fig. 86.

mum of surface with the minimum of substance in cross-section, and hence, as we have seen, the maximum of illumination with the minimum of resistance, and also the maximum of strength in proportion to substance and resistance. Hence, if reduction of resistance in proportion to strength and illumination is

desired, either the rectangular or the hollow circular form is preferable; but if increased resistance in proportion to strength and illumination is desired, the solid circular form with increased length is preferable.

The filament is in all cases made largest at the points of attachment, either in the form given previous to carbonizing, or by the subsequent deposition of carbon on the extremities, or their insertion into small perforated carbon cylinders. This is necessary for the purpose of better attachment to the platinum wires, but more especially to reduce the resistance, and hence the strain on the filament at the points where the current enters and leaves, and to increase the strength where liability to fracture is greatest. The attachment of the filament to the platinum wires is accomplished by different methods; that of the Edison, by copper plating, has been already mentioned. The Lane-Fox filaments are cemented into short carbon cylinders, to which also the platinum wires are similarly attached with a cement made of India ink and plumbago. The attachment of the Cruto filaments is effected by their insertion into tubes formed on the ends of the platinum wires, and the subsequent deposition of carbon by the electric process on these junctions. The Weston filament terminates in carbon cylinders, nickel plated, each about $^3/_{16}$ of an inch in length and $^1/_{32}$ of an inch in diameter, around which are wound in spirals the flattened extremities of the platinum wires. This method is also used with the Bernstein filaments, and is attributed to W. Siemens.

The average durability of filaments is estimated at from 600 to 1,000 hours, or from $2\frac{1}{2}$ to 4 months, with an average use of from eight to nine hours a

day. While there is no actual consumption such as occurs with arc-light carbons, there is a certain amount of wastage caused by the incandescence and residual air, infinitesimal particles of carbon being given off, in the form of vapor, and being attracted to the glass in consequence of the difference of potential between it and the filament, adhere to the sides of the globes, producing a certain degree of blackening.

It has been observed by Edison that with the direct current this wastage is greater in one half of the filament than in the other. This may be accounted for by comparing the positive and negative halves of the filament to the positive and negative carbons of an arc-light pair; and since the consumption of the positive carbon by its electric conversion into vapor is far in excess of that of the negative, the same process, which we may reasonably assume occurs in the filament on a very limited scale, and proceeds from the same cause, will account for this unequal wastage. It is also well known that the durability of the filament is in proportion to the perfection of the vacuum, the residual air producing slight oxidation during incandescence, which, as in the arc light, would be greatest on the positive side.

But, besides the reduction from wastage, the intense molecular action during incandescence, the alternate heating and cooling, and probably also a certain species of electrolysis, which has been observed in solids as in liquids, reduce the structural tenacity, and are the chief causes which eventually result in the rupture of the filament. This is further shown by the fact that its durability depends largely on the amount of current employed. Increased current produces increased light,

but shortens the durability, and it becomes an important economic problem to determine just what amount of current to employ with filaments of a given size and resistance, especially as the rupture of the filament practically terminates the life of the lamp, since filaments cannot, like arc-light carbons, be replaced with new ones in the same lamp, on account of the hermetical sealing and exhaustion of the globe.

Since the wasting of the filament results not only in the conversion of luminous carbon to the black deposit which obstructs the light, but also in increase of resistance by reduction of the filament's cross-section, and consequent decrease of current strength, and hence of illumination at the same potential, the practical value of the lamp usually ceases long before the rupture of the filament, and its further use ceases to be economical.

Lamps of high illuminating power, 100 to 200 candle-power, are constructed either with filaments of proportionally increased cross-section, or with two or more filaments connected in parallel. In the latter construction, the rupture of a filament, though proportionally reducing the light, does not extinguish the lamp, as in the single filament construction. Lamps of 16 to 32 candle-power, for railway service, are also sometimes constructed with two short filaments connected in series, the length of each, and the risk of filament rupture by the jarring of the cars being thus proportionally reduced without reduction of resistance.

Taking three of the leading incandescent systems, as fairly representing the best practical experience in this method of electric lighting, we find that the E. M. F. of the ordinary 16 candle-power lamp ranges from 52 volts to 115, and its current strength from .46 of an ampere to

1.04; the averages being 90.82 volts, and .65 of an ampere, which gives 3.69 watts per candle-power as the average consumption of electric energy. It is found that the flashed filaments are the most durable, and give, on an average, a third more light than those not so treated.

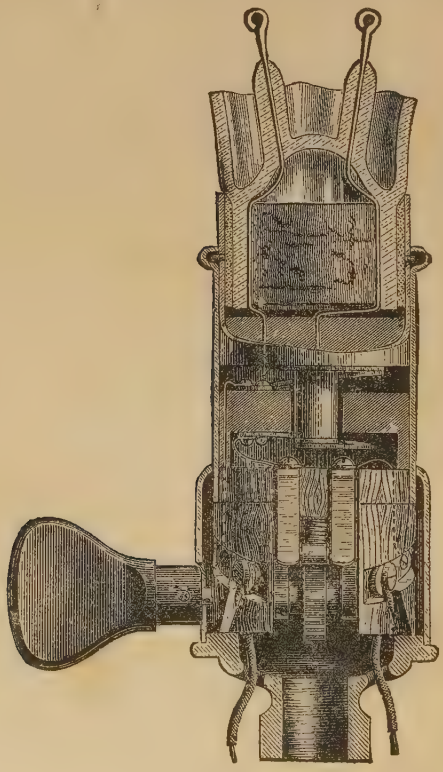

Fig 87.

Construction of the Incandescent Lamp. — As the main features of the incandescent lamps are very similar, we may take the latest Weston 16 candle-lamp,

Figs. 85 and 86, as a fair sample of their construction. The glass globe, or bulb, is about 3 $^1/_2$ inches long by 2 $^1/_4$ inches in diameter. The filament of the horse-shoe form is attached to the platinum wires, as already described; and these pass through two little tubes, as shown in Fig. 87, at the inner closed end of a hollow glass stopper fitted to the neck of the bulb, the glass being fused round them. The neck is wide enough to admit the filament into the bulb without compression; and, after its introduction, the glass is fused around the stopper. A short glass tube projects from the broad end of the bulb, through which the air is exhausted from the interior; after which it is fused, thus sealing the globe hermetically.

The outer end of the tubular stopper is fitted with a wooden insulating plug, which has a central projection about three-eighths of an inch long and one-fourth of an inch in diameter, through which a copper wire, connected with one of the platinum wires, passes, and is attached to a brass screw at its outer extremity; while a copper wire from the other platinum wire connects with a metal washer attached to the broad part of the plug, so that the wires are insulated from each other. A brass collar, connected to the neck outside, fits into a brass tube about two inches long and one inch in diameter, connected to the bracket or chandelier. In this tube are two metal springs, — one of which terminates in a washer, which slips over the projection of the insulating plug, and makes contact with the metal washer on the broad part; while the other makes contact with the screw at the extremity of the projection. These springs are insulated from each other, and connected with the electric circuit, so that the current from one

must pass through the filament to reach the other. The circuit is opened and closed by a hinged metal contact piece, operated by an insulating handle; the closing being effected by the pressure of this piece against a pair of springs so connected with the springs already mentioned as to complete the circuit, and the opening by a reverse turn of the handle, which breaks the contact, so that the lamp is lighted or extinguished by a quarter turn of the insulating handle, like a gas jet. A lozenge-shaped piece of metal attached to the handle, as shown, presses down the hinged contact piece to close the circuit, and holds it in position, and a spiral spring lifts it when released, and opens the circuit, the whole apparatus being inclosed in the brass tube mentioned above.

The lamp bulb is held in connection with this tube, and inclosed apparatus, by little projections on the brass collar attached to its neck, which slip into a groove in the lower end of the tube; so that when a filament breaks, it is but the work of a moment to remove the defective bulb and replace it by a new one, the only loss being the bulb and filament, the other apparatus remaining permanent, and the connections with the new bulb taking place by contact, without further manipulation, as soon as it is placed in position.

It will be seen from Figs. 88 and 89, which represent different styles of the latest Swan lamp, that the method of mounting the lamp, and connecting it with the electric circuit, is essentially the same as that of the Weston and Edison, as shown by the description and illustrations already given; the bulb with its inclosed filament, platinum wires and connections, and brass collar, forming one part; and the brass tube to which it is attached,

Fig. 88.

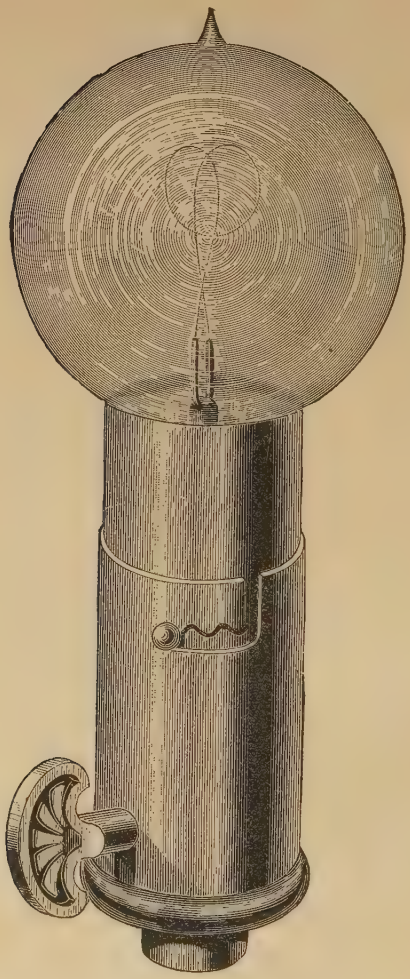

Fig. 89.

as shown, containing the apparatus for opening and closing the circuit by an insulating handle, forming the other part. This apparatus may be varied indefinitely, its construction being a mere matter of mechanical detail.

Position of Lamp. — The position of the lamp is entirely a matter of convenience; it may be placed with the bulb above or below the point of support; in a vertical position, or at any angle required for the radiation of the light in any desired direction. In this respect it has greatly the advantage of the arc lamp, which practically requires a vertical position below the point of support, and casts a shadow on the spot directly underneath; while an incandescent lamp, in the same position, casts no downward shadow.

Renewal of Lamps. — As the rupture of the filament renders the hermetically sealed bulb useless, a method has been patented by which the bulb is closed by a stopper having an elastic packing designed to render the joint air tight, so that the same bulb, with its stopper and connected wires, can be used again by attaching a new filament. This method has evidently not been found practical, since it has not come into use; and it is doubtful whether it would be possible to render such a method practical, or to gain any advantage from it. The packing should exclude the air as perfectly as the hermetical sealing by fusion of the glass, and be of such quality as to resist deterioration from the alternate heating and cooling of the bulb. The exhaust vent would require to be closed in a similar manner unless made through the stopper; and as the stopper, with its connected wires, is more expensive than the bulb, the economic advantage of closing a

vent through it, in the same manner, is apparent, since the hermetical sealing of a vent through stopper or bulb by fusion of the glass renders either practically useless for the introduction of a new filament.

If the expense of refitting incurred by this method should prove equal to that now incurred by the loss of the hermetically sealed bulb, there would be no advantage in its adoption. This expense would include the removal of the black deposit from the interior of the old bulb, the removal of the packing, removal of the old filament and attachment of the new, and the exhausting.

The loss of the bulb itself is insignificant, since its value is no greater than that of any ordinary glass bottle of equal size and quality; and the platinum wires are easily removed from old stoppers by fusing the glass. The principal loss is the time and labor expended in fitting up and exhausting the lamp, which, including the items mentioned above, would be practically the same for renewing an old lamp by the proposed method as for preparing a new one by the present method. The present charge to the consumer for a new sixteen-candle lamp, to replace an old one, after deducting rebate for platinum wire of old lamp, ranges from 40 cents to 80, according to the kind and quantity purchased.

CHAPTER IX.

The Storage Battery.

Electric Storage. — When water is decomposed by an electric current, and the gases collected in separate receptacles, if the connection with the battery be severed, and the wires leading to the gas tubes brought into contact, a current of electricity will flow through them in the reverse order to that of the original current, the gases at the same time recombining to form water. From which it is evident that the electric energy expended in decomposing the water is stored up in the gases, and recovered when they recombine. Oxygen accumulates at the positive pole, and hydrogen at the negative; and in order to collect the gases, platinum terminals for the wires are required, since the oxygen unites with the terminal, if composed of any of the baser metals, and appears in the combined form of an oxide instead of the separate form of a gas. But experiment proves that electric energy is also stored up in the oxide when so formed, and may be recovered from it.

Observation of these facts by Gautherot and Ritter in the early part of the present century, indicated the possibility of storing electricity so as to obtain a continued current similar to that from the battery, instead of the instantaneous discharge obtainable from the Leyden jar, or the condenser. On this principle Grove,

in 1842, constructed a gas battery, using at first oxygen and hydrogen collected in glass tubes with platinum electrodes; but subsequently various other gases, and finally plates covered with peroxides of metals. Numerous other attempts to accomplish this were made from time to time by Wheatstone, Siemens, Kirchoff, and others, but without any practical result till about 1859, when Gaston Planté, a French electrician, began a course of experiments for this purpose, which resulted in the discovery that lead plates could be so prepared, electrically, as to produce the desired result, by allowing the oxygen, as it accumulates at the positive pole, to combine with the lead of a plate provided for that purpose, and form a peroxide (PbO_2), while the hydrogen accumulates on a similar plate at the negative pole. And on this principle he constructed his secondary cell.

Planté's Secondary Cell. — This cell was originally constructed with two plates of sheet lead, separated by strips of gutta-percha; one sheet being laid over the other with two gutta-percha strips between them, and two more laid on the upper sheet, as shown at *A*, Fig. 90. They were then rolled together and clamped, giving them the compact form shown at *B*, a strip of lead being left attached to one corner of each sheet in cutting, by which connection could be made for charging and discharging. The sheets, rolled together in this manner, were placed in a tall jar of glass or hard rubber, containing water mixed with ten per cent of sulphuric acid; the jar being fitted with a hard-rubber cover provided with binding screws, to which the connecting strips were attached, and also clamps for holding wires to show the heating effects of the discharge.

The next step was the electrical preparation of the plates, which was accomplished by charging them with a battery of two or more cells, one cell being insufficient to overcome the resistance from polarization. The current was continued till the oxygen evolved at the positive pole ceased to combine with the lead, and was given off as gas. The cell was then disconnected from the battery and discharged, by making connection between its electrodes, and a fresh charge given in reverse order, and continued as before until

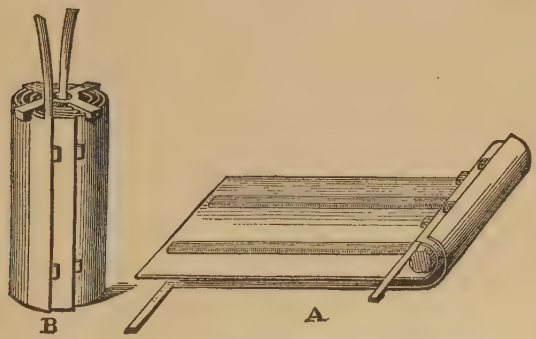

Fig. 90.

gas was given off. This process was continued for several months with intervening periods of repose, during which the cell remained charged; and the time of charging was increased from a few minutes on the first day, to several hours subsequently. In like manner the periods of repose were increased from hours to weeks and months.

Chemical Reaction in the Planté Cell. — To understand the object of this treatment, it is necessary to examine the chemical reactions which take place in connection with the electric action. It will be

noticed that three distinct periods are required in this process: the period of charging, of repose and of discharging, during each of which a distinct chemical reaction occurs. During the charging, as already stated, peroxide of lead collects on the plate connected with the positive pole, and hydrogen on the one connected with the negative. But at first only a thin film of the peroxide is formed, and a small amount of hydrogen collected, and the absorption of the gases soon ceases. The plates are then discharged, and during the discharge the peroxide, which is insoluble in sulphuric acid, is reduced to monoxide, PbO, which is immediately reduced to sulphate of lead, $PbSO_4$, by the acid present in the solution; while the oxygen atom, taken from the peroxide, unites with the lead on the opposite plate, forming monoxide, which, in turn, is reduced to sulphate.

The result of the first discharge, then, is a thin film of the sulphate on each plate. The plates are then charged in reverse order, and the sulphate on the plate now connected with the positive pole is reduced by the oxygen to peroxide, while that on the opposite plate is reduced by the hydrogen to spongy lead, which adheres to the plate in a finely divided condition. As each subsequent charge, after discharge and reversal, produces the same result, each coating continues to increase in thickness; and the spongy lead affording increased facility for the formation of the peroxide, the chemical reaction proceeds more rapidly.

But the increased thickness of the peroxide soon interposes a strong resistance to this reaction, hence a period of repose previous to the discharge becomes necessary; and during this period local action, as it is

called, takes place. This consists in the reduction of the peroxide to sulphate from the reaction of the supporting lead plate; the metallic lead having a strong affinity for oxygen, the peroxide parts with one atom of its oxygen, which unites with the lead, and the resulting monoxide is immediately reduced to sulphate by the acid.

The chemical reaction of the discharge may now be more fully considered. Its result, as has been shown, is the formation of sulphate of lead on both plates; and this sulphate, lying next to the plates, forms a resistance which impedes local action, which, as shown above, takes place during the period of repose. If the discharge is rapid, there occurs not only a reduction of peroxide to sulphate on the one plate, but also a reduction of a portion of the sulphate on the other plate to peroxide through an excess of electrolytic oxygen; and this reaction tends to reduce the difference of potential, and to produce electric equilibrium.

But during the period of repose, this peroxide, being limited in quantity, and in close contact with the spongy lead, is rapidly reduced to sulphate; while the original peroxide coating on the other plate, from its greater thickness and the resistance of an excess of sulphate, is reduced much more slowly. Hence, there is a partial restoration of the original difference of potential, which accounts for the renewal of electric energy manifest in a partially discharged cell after a period of repose. These various chemical reactions result in an increased thickness of the peroxide deposit with each charge, while an increased thickness of spongy lead remains on the opposite plate after each reversal; and when the process has been continued long enough to

produce a sufficient thickness of each coating for a practically serviceable cell, the alternate charging and discharging with reversal is discontinued, and the cell, being ready for use, is always thereafter charged in the same direction.

Each discharge, as shown, produces sulphate on both plates, but the oxygen generated on the plate connected with the positive pole reduces the greater part of the sulphate on that plate to peroxide; while the remaining portion, being in immediate contact with the plate, tends to preserve it from further disintegration. When the cell is put into practical use, these chemical reactions continue, the same as during the forming process, sulphate being reduced to peroxide by each charge, and peroxide to sulphate by each discharge; and the electric energy varies as this reaction, and ceases when the chemical affinities are satisfied.

The electric energy of the secondary cell, then, like that of the primary, is dependent on chemical reaction, the difference being that in the primary cell chemical reaction, with the generation of electricity, takes place spontaneously on the completion of the circuit, and continues indefinitely, for months or years often in well-constructed cells; while in the secondary cell the electric energy must first be supplied from an external source, and the action, both chemical and electrical, is limited and definite, dependent on the amount of electric charge given.

It does not appear that Planté himself fully understood the nature of the chemical reactions which take place, but proceeded on his practical observation of results; and it was not until 1882 that the chemical reactions producing these results were discovered by

the English electricians, Gladstone and Tribe, and described substantially as here given.

A cell prepared in this way has a maximum E. M. F. of about 2.54 volts, and a variable resistance of half an ohm or less. When fully charged, it gives for several hours a current of varying constancy, dependent on the external resistance to be overcome, after which the current rapidly declines.

THE PLANTÉ BATTERY. — With a battery of these cells, Planté used a commutator by which they could

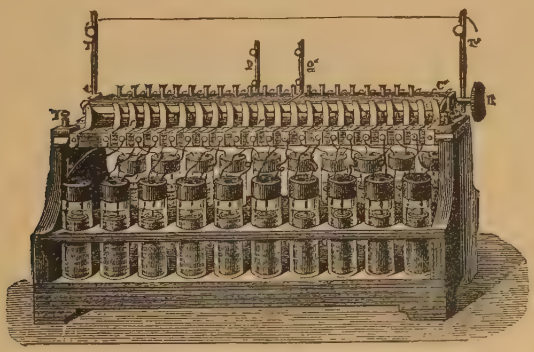

Fig. 91.

instantly be joined either in parallel or in series. Fig. 91 represents such a battery, composed of twenty cells.

The commutator is placed above, and is constructed with a cylinder of hard-rubber, which can be revolved by the milled head *B*. To this cylinder are attached, on opposite sides, two brass strips equal to it in length, against which press 40 brass springs, 20 to each strip, attached to opposite sides of a hard-rubber support, placed underneath the cylinder, as shown. These springs are

connected by conductors with the battery electrodes below; all the electrodes intended to be of one kind being connected with the springs on one side, while those intended to be of the opposite kind are connected with the springs on the other side; and thus the cells are joined in parallel.

Between each opposite pair of springs, a brass pin passes through the center of the hard-rubber cylinder, at right angles to the strips; the ends projecting slightly, as shown in the figure. By a quarter revolution of the cylinder the contact of the springs is changed from the strips to the pins, and each opposite pair of springs electrically connected, while insulated from all the others: and thus each positive electrode is connected through the springs and pin with the negative electrode of the adjoining cell; the connections with the springs being so arranged alternately as to produce this result, and thus join the cells in series.

For charging, Planté joined the cells in parallel, and thus obtained a very low resistance, so that two Bunsen cells furnished a current of sufficient strength. But for discharging, he joined them in series, and obtained a maximum current equal to that of thirty large Bunsen cells. But as the battery was not a generator, but an accumulator, it could only return the electricity which it had received less a certain percentage of loss from leakage, which Planté estimated at about ten per cent; and as it was used chiefly for such laboratory experiments as the heating of short wires, the external resistance being very low, the discharge was proportionally rapid, and hence the strength of the current quickly declined, the maximum being maintained for only a few seconds.

Such was the original battery of Planté; an invention of the highest importance when regarded in the light of subsequent development, bearing the same relation, in this respect, to secondary batteries that Volta's does to the primary, but of very limited practical value, and, previous to 1880, scarcely more than a laboratory instrument. But it demonstrated several very important facts: 1. The practicability of constructing a storage battery, which could give, for even a limited time, a continuous and very powerful current, far in excess of that by which the charge was given. 2. That lead was especially well adapted for the electrodes, and water, acidulated with sulphuric acid, for the electrolyte. 3. That peroxide of lead was the best material for the positive plate, and spongy lead for the negative. Its principal defect was the tedious and expensive process of preparing the plates, a defect fatal to the practical use of the battery.

Faure's Secondary Cell. — About 1880, Camille A. Faure, another French electrician, constructed a cell similar to Planté's, in which he substituted plates prepared by a mechanical process for those prepared by the electric process. His method consisted in coating their surfaces with a paste of red lead (minium, Pb_3O_4) and sulphuric acid, which, when subjected to electric action, was rapidly reduced to peroxide on the one plate, and spongy lead on the other. After this coating was applied, it was covered with paper, and each plate then enveloped in felt, to retain the coating on the surface, and to insulate the plates from each other. They were then rolled together and placed in the acidulated water in the cell, and subjected to electric action with reversal; and in a few days the cell was ready for use.

Chemical Reaction in the Faure Cell. — The chemical reaction in this cell, as described by Gladstone and Tribe, is very similar to that in the Planté, but differs in the preliminary stage. The minium on the plate connected with the positive pole is reduced in part to peroxide by the absorption of two atoms of electrolytic oxygen, which, being added to the four oxygen atoms of the minium, make the oxygen atoms double those of the lead; $Pb_3O_4 + O_2 = 3\,PbO_2$. But the sulphuric acid reduces part of the minium on this plate, as well as on the opposite plate, to sulphate; and this sulphate on the opposite plate is, in turn, reduced to spongy lead by the hydrogen, as in the Planté cell. The reduction of minium to sulphate by the acid is as follows: $Pb_3O_4 + 2\,H_2SO_4 = PbO_2 + 2\,PbSO_4 + 2\,H_2O$.

The great advantage, then, of the Faure cell over the Planté, consists in the rapid reduction of minium instead of the slow reduction of metallic lead, thereby greatly reducing the cost. This cell, when subjected to practical tests, was found equal in energy to that of Planté's, and it received the sanction of electricians of the highest standing, while its cheapness and facility of construction commended it at once to popular favor. The invention of the dynamo, too, having greatly reduced the expense and increased the facility of electric generation, the great problem of the supply of electric energy, at economical rates, for general use as an illuminant and a motor, was apparently solved, since the electricity generated by the dynamo could be stored in the battery, to be transported and used wherever required for the propelling of cars or boats, the operation of light machinery, and the illumination of dwellings and offices.

Faults of the Faure Cell. — But the new cell soon developed serious faults, which had to be overcome before these ends could be realized. The coating could not be made to adhere to the surface with proper uniformity, but sloughed off partially, and collected in a mass at the bottom of the felt envelope. The space between the plates being entirely filled by the felt, the free circulation of the electrolyte necessary to the proper action of the cell was impossible; and the felt, becoming corroded and partially removed in spots by the acid, soon ceased to act as an insulator; short-circuiting ensued, and the cell became worthless. But the rapid preparation of the plates by mechanical process was a very important step in advance of the slow electric process of Planté; and while the disappointment at the failure of the battery was as great as the enthusiasm with which its first appearance was hailed, electricians, confident of ultimate success, still worked patiently to overcome the faults which had been developed.

The Improved Faure Secondary Cell. — The various improvements of Swan, Sellon, Volckmar, Shaw, and others, from 1880 to 1886, resulted in producing the improved cell shown in Fig. 92. It is made of different sizes, and with a variable number of plates, according to the purpose for which it is intended, the style here shown being the 23-plate stationary cell, having 11 positive plates and 12 negatives,—those plates being known as positive which are connected with the positive pole in charging, and from which the external current flows in discharging, and the others being known as negative. Each set is attached to a lead cross-bar above and at the center, by which the plates are held at a fixed dis-

tance apart; the two sets interlocking, so that positive and negative plates alternate and are insulated from each other by two rows of hard-rubber forks. Each plate is $\frac{1}{8}$ of an inch thick, and the space between adjacent, positive and negative plates, $\frac{5}{32}$ of an inch wide; and the two outside, negative surfaces being inactive, each set has 22 interior, active surfaces.

A thick plate of glass, under the central cross-bar and plate connections on each side, supports the plates, so as to leave a space underneath for the free circulation of the fluid; each set being supported, on its opposite side, by plate projections which rest on an insulating hard-rubber strip above each cross-bar as shown; two stout rubber bands holding these supporting plates and the lower parts of the lead plates in position. A lead bar, projecting from the cross-bar of each set, can be bent into any convenient position for making connection with adjoining cells.

These plates are immersed in water acidulated with 36 per cent sulphuric acid, contained in a glass jar $10\frac{1}{2}$ inches long, $8\frac{1}{2}$ inches wide, and $9\frac{7}{8}$ inches high; the entire weight of jar and contents being 50 lbs.

The glass jar has the advantage of allowing inspection of the interior without disturbing the contents, by which the condition of the plates may be observed, and short-circuiting from the buckling of plates or the lodging of loose paste plugs between them remedied; but its comparative frailty and weight are objections to its use for the portable cells required on cars and elsewhere. Hence a portable cell of the same capacity and number of plates is constructed with a covered, hard-rubber jar, made shorter below than above so as to furnish supporting ledges for the plates at the opposite

ends, which take the place of the glass supporting plates employed in the stationary cell. The weight of this cell is 40 lbs., its height about the same as that of the

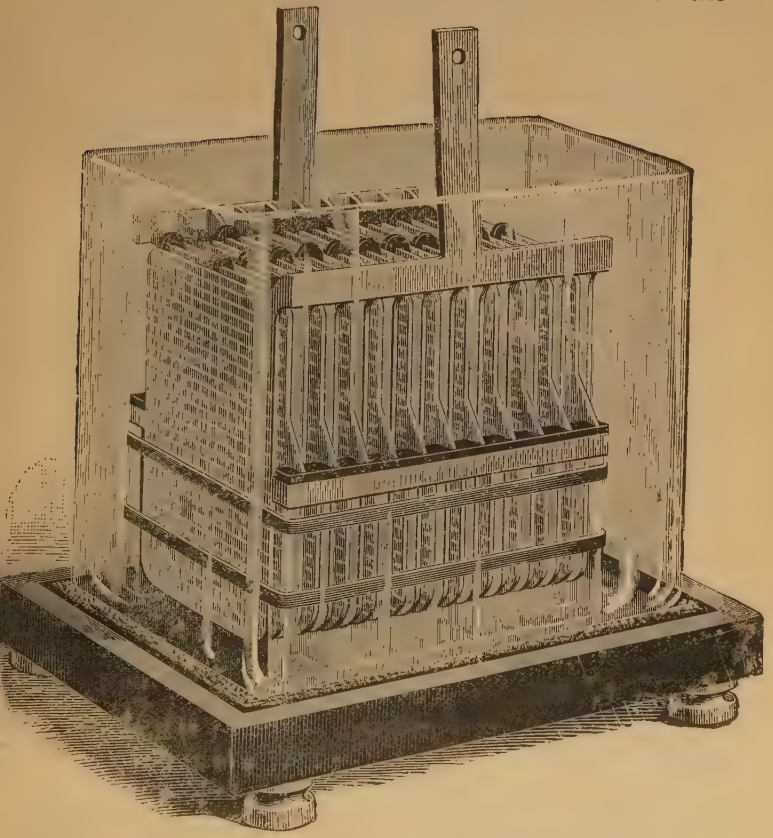

Fig. 92.

stationary cell, and its other dimensions about one fourth less.

The 15-plate stationary cell has 7 positive plates, each $\frac{6}{32}$ of an inch thick, and 8 negatives, each $\frac{5}{32}$ of an inch thick,

contained in a glass jar $10\frac{3}{4}$ inches long, $12\frac{1}{4}$ inches wide, and $13\frac{3}{4}$ inches high; the entire weight being 130 lbs., and the storage capacity 300 ampere-hours, double that of the 23-plate cell. The supporting plates are of hard-rubber, with openings for inspection, and are each held in position by two metal rods which pass through loops in the positives at one end and in the negatives at the other, binding the plates of each set together below and furnishing electric connection between them. The plates are made of lead, cast in the form of grids, with square openings to hold the paste, as shown at *A* in Fig. 93, this form being the invention of Swan. Each opening is $\frac{3}{8}$ of an inch square at the surfaces, but smaller at the center, the walls being thicker, sloping inward from each surface, as illustrated by the cross-section shown at *B*, an improvement made by Sellon to prevent the paste from dropping out. These openings are filled with the paste of lead oxide and sulphuric acid; minium, Pb_3O_4, being used for the positive plates, and litharge, PbO, for the negatives, each plug being held in its place by the peculiar form given to it by the opening.

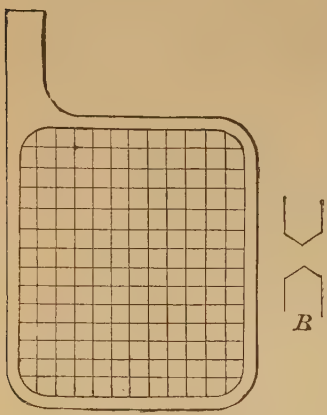

Fig. 93.

Electric Formation of the Plates. — In the electric formation of the plates at the factory, each set is charged separately, a set of temporary plates, or dummies, of each kind being used with each permanent

set. As the formation of the negatives requires a much longer time than that of the positives, litharge is preferred for them, being far more rapidly reduced than minium, which is used for the positives. But this difference of material compensates only partially for the difference in time; the negatives requiring six days for the reduction of the litharge to spongy lead, while the positives require only twenty-four hours for the reduction of the minium to peroxide. But the use of the dummies prevents any inconvenience which might arise from this source, and renders the old process of reversal unnecessary. After the plates have been formed in this way, they are partially discharged before shipment, and require to be properly charged when the cells are completed and ready for use.

Electro-Motive Force, Resistance, and Current of Cell. — The average E. M. F. of the cell is about 2 volts, its internal resistance from .001 to .005 of an ohm, and its working capacity 300 ampere-hours. The current varies with the external resistance, and the rate of discharge can be regulated by this resistance. A medium rate gives the most satisfactory results, and is found to be the most economical. Hence, while a current of 300 amperes can be obtained and the cell discharged in an hour, such a rate is wasteful, and would soon injure the plates; while with a 30-ampere current the cell will do efficient work for 10 hours, without waste or injurious results.

It has been shown that the electric energy obtained by the discharge depends on the coincident chemical reactions, and that these reactions require time for their normal development; hence if the discharge is too rapid there will be abnormal chemical reaction with

corresponding waste and injury. For the same reason, a medium rate of charging which allows sufficient time for the complete chemical reduction of the gases is the most economical; while with too rapid a rate, a portion of the gas escapes and is lost. The same result follows from overcharging, though in either case there is no injury to the plates, since there is no excess of chemical reaction as in discharging. As a result of the charging, a residual amount of gas adheres to the plates, oxygen on the positives, and hydrogen on the negatives, which does not enter into chemical combination; this increases the initial E. M. F. of the discharge to 2.25 volts; but as this gas is soon reduced, the E. M. F. falls rapidly, so that at the end of the first half hour it is about 2.04 volts, after which it remains nearly constant for several hours, gradually declining to two volts or less. When the cell is nearly discharged, the decline becomes very rapid, and if the discharge is continued when this stage is reached, permanent injury to the plates is the result; hence the discharge should be stopped when the E. M. F. falls much below two volts.

Cause of Buckling. — Buckling is a result of the formation of sulphate in discharging, producing unequal expansion. If it were possible to obtain perfect uniformity in the material of the plates and in the solution, so that the expansion in discharging, and the contraction which follows in charging, should be uniform, buckling could not occur. But, like every other species of warping, it is a result of want of uniformity, either in the material, or in the action to which it is subjected, or in both. The acid, from gravitation, becomes denser in the lower part of the cell, and this affects both the chemical reaction and electric conductivity, both of

which are greatest when the acid is most dense; and observation on buckled plates shows a curving from top to bottom, steadily increasing downward. But buckling does not interfere with the action of the cell until it has proceeded far enough to produce short-circuiting, by bringing plates into contact, or displacing plugs of paste.

The pressure of the hard-rubber forks tends to prevent buckling and to maintain evenness of surface, keeping all the plates everywhere at equal distances apart; while the rubber bands, by their elasticity, keep the pressure uniform, so that if buckling occurs, it is likely to affect all the plates equally, in which case short-circuiting cannot occur. The rubber bands and forks have also the very important qualities of being good insulators, and practically indestructible in the acid.

Variable Resistance of Electrolyte. — The expansion of the plates while discharging is the result of the absorption of sulphuric acid to form the sulphate, and the acid absorbed in this way during the discharge is restored during the charging; from which it is evident that the conductivity of the electrolyte is subject to continual variation; steadily increasing during the charging until the full proportion of acid is restored, and declining during the discharge as the acid is absorbed; consequently the internal resistance of the cell varies inversely in the same ratio, and hence the necessity of the large percentage of acid used, that the resistance during the discharge may not become so great as to lessen the practical efficiency of the cell; as a smaller percentage would be liable to entire absorption before the termination of the discharge, leaving only water,

which has a very high resistance as compared with that of dilute acid.

Too large a percentage of acid is also detrimental by producing an excess of sulphate, and consequent buckling of the plates during the discharge; so that the proper proportion to be used is of great practical importance, and the 36 per cent, already mentioned, seems to give the best practical results.

The Pumpelly Cell.—A cell has recently been invented by J. K. Pumpelly of Chicago, the principal features of which are a horizontal position of the plates, supporting material between them, copper electrodes centrally located on opposite sides of the cell and reaching to its bottom, and a containing vessel of light durable material. The construction, in other respects, is similar to that of the Faure cell, and the same materials are employed for the grids, paste, and fluid. A slight burr at the narrow part of the grid openings holds the paste more securely, 12 per cent of antimony enters into the composition of the grids, and 20 per cent of sulphuric acid into that of the fluid.



Fig. 94.

Fig. 94 shows the construction. The positive and negative plates alternate in position, the top and bottom plates being negative, and they are supported and insulated by wood cellulose, said to be a good insulator, an excellent absorbent, and indestructible in sulphuric acid. Each plate has, at the center of one of its edges, an opening about an inch square, and, at the same point

on the opposite edge, a round, vertical, tubular projection about an inch high and half an inch in diameter, on the under side of which is a small socket fitted to the upper end of a similar projection from the alternate plate underneath.

When the plates are built up in the cell, with the cellulose between them, each set has the projections all on the same side and the openings on the opposite side; the projections of each alternating with the openings of the other on the same side; so that each projection from a negative passes up through an open ring in a positive, with ample space for insulation, and helps to support the next negative above; and each projection from a positive passes similarly to the next positive through an opening in the intervening negative. These projections form a continuous tube on each side, from top to bottom, in which are placed the copper electrodes, and melted lead is poured in around them, giving perfect metallic contact, and holding each set of plates firmly in position.

The plates, thus built up, are immersed in the fluid in a hard-rubber vessel, rest on wooden blocks, and are charged, without reversal of current, in the cell designed for use. The E. M. F. is about 2 volts.

THE JULIEN ACCUMULATOR. — The Julien accumulator, or storage battery, illustrated by Fig. 95, is the invention of Edward Julien, a Belgian engineer. Its general principles of construction and operation are essentially the same as those already described; but his specific claim is that the grids or supporting plates are made of a special metallic composition which prevents oxidation and buckling, giving the battery much greater

durability than can be obtained by the use of lead grids. The nature of this composition, known as "L'Electrique," is a business secret; but it is said to consist of 94.5 lead, 4.2 antimony, and 1.3 mercury.

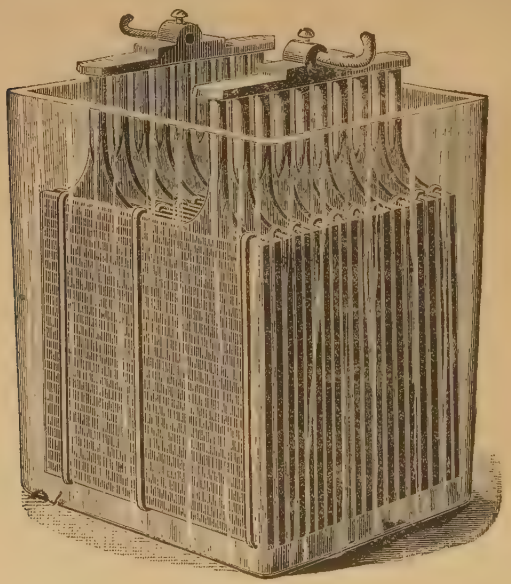

Fig. 95.

Durability of Storage Cells.—Manufacturers usually guarantee for the positive plates a durability of one year, in constant practical use, with a normal current. The negatives are far from durable, not being subject to oxidation; and, unless injured by buckling, last for an indefinitely long period.

Definitions. — The terms "accumulator," "secondary cell," and "storage battery," are used to designate the apparatus described in this chapter, the last being the most common, most specific, and perhaps the least objectionable.

CHAPTER X.

Electric Distribution.

We have seen, in the preceding chapters, how electricity may be generated, measured, accumulated, and made to produce light. It now remains to be shown how it may be distributed from the generator to the lamps.

In small installations — as in the lighting of a single store, factory, or office building — distribution is comparatively easy: but, with increase of area and of the number of lamps, the difficulties increase; so that distribution over a large area in a town or city, from a central station, by means of conductors placed on poles or in underground conduits, supplying current to numerous consumers under varying conditions, accurately measuring the amount of current consumed by each, guarding against wastage of current, and against danger to life and property from its effects, is a problem in electrical engineering of the greatest intricacy and magnitude.

Arc-Light Distribution. — The methods of distribution for the arc light and the incandescent light are essentially different. As each arc lamp consumes a large amount of current, while the amount consumed by each incandescent lamp is comparatively small, the number of lamps fed by a given supply of current must vary in like proportion, and the means of distribution

must be such as to furnish the proper amount to each without wastage. A ten-ampere current required by an arc lamp, for example, would supply twenty incandescent lamps of $\frac{1}{2}$ an ampere each. Hence, it is found most practical and economical to adopt the series system of distribution in arc lighting, and the parallel in incandescent lighting. This rule is not rigidly adhered to in incandescent lighting; the series system being, to a certain extent, combined with the parallel; but in arc lighting the series is found to be the only system in which proper regulation can be made practical, and all attempts to combine the parallel with it, which, till recently, it was supposed could be accomplished, have been abandoned. But it is sometimes found convenient, though not desirable, to place both arc and incandescent lights in the same installation, fed from the same dynamo; in which case the arc lights are placed in series, and the incandescent in parallel.

In both systems the E. M. F. or voltage of the dynamo, and the resistance of the circuit, are the factors which govern the supply of current, and the chief fundamental principles on which every installation is based, copper being always used for the conductors.

Series Installation. — Fig. 96 gives a good general idea of an arc light installation; L, L, L, representing the lamps in series, and D the dynamo, series wound, with its + and − poles, as marked, from which the direction of the current can be ascertained. The position of the wires is a mere matter of convenience. They may be led through a building in any direction, — through or along walls, ceilings, or floors, — provided that proper insulation is maintained, and proper precaution against dangerous proximity to inflammable

substances or to the occupants. In such an installation the full current, leaving the dynamo at + and returning to it at —, passes through every lamp in the series. This current is maintained at a certain constant strength required by the construction of each particular style of lamp, and determined by the E. M. F. of the dynamo, and the full resistance of the entire circuit, including the dynamo, the lamps, and the conducting wires. The strength of current required varies greatly, ranging from ten to twenty amperes for series installations in the various leading arc light systems. Assuming a 15-ampere current to be required by the ten lamps shown in Fig. 96, and that each lamp has a resistance of 3 ohms, the dynamo a resistance of 5 ohms,

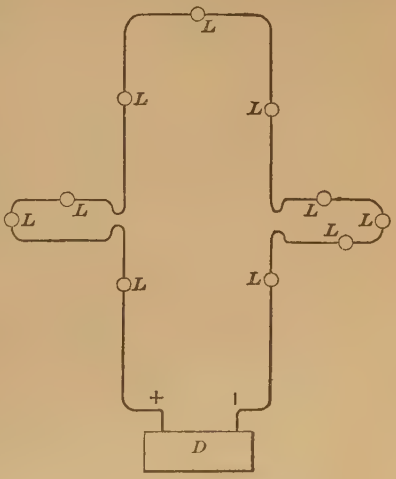

Fig. 96.

and a mile of No. 6 B. & S. wire, required for the circuit, a resistance of 2 ohms, then $(10 \times 3) + 5 + 2 = 37$ ohms the entire resistance, and $37\ R \times 15\ C = 555$ E. Hence, such an installation would require a 555-volt dynamo, each of the ten lamps requiring 55.5 volts.

Hefner von Alteneck's Regulator. — Each lamp in such a circuit is provided with a shunt similar to that used with the Brush lamp, as described on pages 180–183, by which constancy of current is maintained under

change of resistance. This construction, which varies in different systems, was first introduced by Hefner von Alteneck, as mentioned on page 177, and will be readily understood from Fig. 97. The line L divides at i; the upper branch, composed of fine wire, being the shunt, and including the fine wire coil R, reunites with the main line L_1 at the lower carbon holder b, thus passing round the lamp; the lower branch, composed of coarse wire, and including the coarse wire coil R_1, is connected with the lever $c\ c_1$, near its fulcrum d, the arm c_1 con-

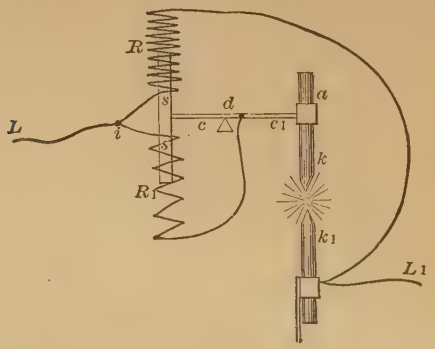

Fig. 97.

necting with the carbon holder a, and c with the iron rod $s\ s$, the weight of the rod counterbalancing that of the carbon and holder. This branch is thus connected directly with the lamp, reuniting with the main line at b. When the carbons k, k_1, are in contact, and a current passes, it divides at i in proportion to the respective resistance of each branch; the stronger current going through the coil R, and carbons k, k_1, to the line L_1; rod $s\ s$ is drawn down by the greater attraction produced by the stronger current through the low resistance coil R_1, the upper carbon K is lifted, and the arc lighted.

The lighting of the arc increases the resistance of the lower branch, and in like proportion the potential difference, or E. M. F., between L and L_1; and the strength of the current in R being increased by this increase of E. M. F. in the same ratio as that of R_1 is diminished by the increased resistance, the descent of the rod $s\ s$ is checked by the opposing attraction of the coil R. The arc is thus maintained at its normal length by the opposing attractions of the two coils; any tendency to variation of length in the arc tending to produce corresponding variation of the relative current strength in the opposing coils.

It is evident that by varying the amount of wire in either coil, or changing its position with reference to the depth to which the rod $s\ s$ penetrates, any required adjustment of relative strength in attracting the rod may be obtained.

The term differential is used to designate lamps constructed in this manner. Without some such construction, it would evidently be impractical to place lamps in series, as any variation of current strength in one lamp would affect every lamp in the series, producing continual fluctuation of the light, which would increase with the number of lamps; and if one lamp were extinguished, the interruption of the current would extinguish all the others; while the extinguishing of a differential lamp diverts the entire current through an automatic cut-out, similar to that of the Brush lamp, already described, by which an extinguished lamp is entirely eliminated from the circuit, and the full current permitted to flow to the other lamps; the constancy of the current at a given strength being maintained by the various devices already described in connection with dynamos.

This ideal representation of an arc-light installation is intended to embrace the leading principles which govern every such installation, while in their practical application they are modified according to the requirements of each particular system. The number of lamps in one circuit fed by a single dynamo varies from one to fifty, or more; and the resistance, electro-motive force, current, candle-power, and methods of regulation, are numerous, and differ widely in the various systems.

The dynamo is almost exclusively the direct current, series wound machine, the alternate current dynamo being seldom used now for arc lighting.

In distribution to an extended area from a central station, in both arc and incandescent lighting, large conductors are used for the main leads, composed often of copper wires twisted together as a cable, to give the required flexibility combined with size. In large cities the mains, properly insulated, are usually required to be placed in underground conduits of lead or iron pipe, the iron being usually laid in the earth under the pavement, while the lead are inclosed in sub-ways, preferably of a composite insulating material, into which they can be drawn without disturbing the pavement. Branch circuits from the main line, and connected with it in series, extend into stores, office buildings, and factories; and the consumption of current is estimated by the number of hours light is required, and the size and number of lamps; a method which becomes the more practical since the lamps require daily attention by an expert, for renewal of carbons.

Numerous independent main circuits extend from large central stations, fed by powerful dynamos; the number of dynamos running simultaneously varying

according to the amount of light required at different periods during each twenty-four hours, thirty to forty being often in operation at the same time in one room.

INCANDESCENT LIGHT DISTRIBUTION. — Incandescent lighting, as already stated, requires the parallel system of distribution.

The difference between this and the series system will be understood from Fig. 98. Between two main conductors extending from the dynamo, are placed, in parallel, several short lines connecting with the lamps, the current being thus divided among the lamps in proportion to their number and resistance, while in the series system the entire current passes through every lamp. This method is common to both the direct and alternating current systems, which in other respects are so radically different, especially in their methods of distribution, that it is important to consider each separately.

Fig. 98.

THE DIRECT CURRENT SYSTEM. — The dynamo in this system has usually an effective E. M. F. of about 100 volts, after allowing a small percentage for loss in distribution; it is either shunt wound or compound wound, so that the current which goes to the lamp circuit is either wholly or partially independent of that which passes through the field-magnet coils, and hence the resistance of this dynamo in the circuit is far less than that of the series wound machine, in which the entire current passes through those coils.

As the main conductors are required to carry a very

large current, they are proportionally large; the cross-section varying in proportion to variation of length, and number of lamps to be supplied, in order to equalize the resistance, and maintain constancy of current; it may be less than half a square inch, or exceed twelve square inches. As a fair illustration of the required size, it may be stated that the cross-section of a cable required to carry a current sufficient to feed 5,000 16 candle-power lamps, at a mean distance of 4,000 feet from the dynamo, would be about 12.57 square inches. But as the current divides at each short parallel line, the size of the main conductors is proportionately reduced as they extend; while these short lines on which the lamps are placed, require only single wires of about No. 14 or 16 gauge.

The resistance of the leading mains is, of course, very low; and the fall of potential between the dynamo and the lamps, due chiefly to this resistance, varies usually from $2\,{}^{1}/_{2}$ to 10 per cent. To reduce this loss so as to raise the potential at the lamps to a certain given percentage, without change in the efficiency of the dynamo, the cross-section of the mains must be increased in proportion to the square of the increase required in percentage; and as this must evidently make a great difference in the amount of copper required, this percentage becomes a very important factor, requiring careful calculation in every installation.

The resistance of the lamp, on account of the fineness and length of the carbon filament, is far in excess of that of the arc lamp; and the filament when cold has nearly double the resistance of the heated filament through which a full current is passing; hence

the cold resistance of the circuit, when the current is first turned on, is far in excess of the subsequent hot resistance.

PARALLEL INSTALLATION. — From these data we can form an ideal estimate of an installation arranged as in Fig. 98. If we suppose all the short parallel lines removed except the upper one with its lamp, or, what is practically the same, all the lamps except the upper one extinguished, the arrangement would not differ materially from that of an arc-light circuit having a single lamp; the entire current passing through this lamp, and its strength being determined by the effective E. M. F. of the dynamo, assumed to be 100 volts, divided by the entire resistance, including as before that of the dynamo, the conductors, and the lamp. Estimating the resistance of the dynamo and conductors at 1 ohm, and the hot resistance of the 16 candle-power filament at 199 ohms, we have an entire resistance of 200 ohms, and $\frac{100E}{200R} = \frac{1}{2}$ an ampere, the current strength. But if two lamps be lighted, we furnish two paths of equal resistance, instead of one, between the mains, and reduce the filament resistance in the same ratio; $1R + \frac{199R}{2} = \frac{201R}{2} = 100\frac{1}{2}$ ohms. And since the fraction in this case is practically insignificant, it may be neglected, and we have $\frac{100E}{100R} = 1$ ampere, the entire current strength, which, being equally divided between the two lamps, gives each $\frac{1}{2}$ an ampere as before.

For any small number of lamps the resistance varies inversely and the entire current directly as the number lighted, and the current per lamp remains practically

constant, as shown, being equally divided among the entire number lighted. But as the resistance of the dynamo and circuit remains constant while that of the filaments varies, it is evident that in the lighting of any considerable number of lamps the fraction, neglected above, would make a sensible difference in the ratio of resistance to E. M. F. Suppose that 100 were lighted, then the entire filament resistance would be $\frac{199R}{100} = 1.99R$, and, adding in the 1 ohm constant resistance, we have 2.99 ohms as the entire resistance; hence $\frac{100E}{2.99R} = 33\frac{44}{100}C$, which, divided among the 100 lamps, gives about $\frac{1}{3}$ of an ampere per lamp, instead of $\frac{1}{2}$ an ampere, with only one or two lighted.

There is also a certain amount of current wastage, making an entire current variation of 15% to 20%, which must be provided for in order to maintain constancy of current and illumination. This, in the direct current system, is done by the introduction of resistance coils into the circuit, by which the current can be varied by variation of the resistance, and in the alternating current system by a direct variation of current in the converter. Hence when the indicator at the station shows a variation of current below or above the normal, by the lighting or extinguishing of any considerable number of lamps, the attendant makes the necessary correction by moving a switch either in the resistance box or converter, according to the system of lighting employed.

The necessity for the greatly increased size of the mains, as compared with those used for arc lighting, becomes apparent when we compare the requirements of a 200-ampere current with those of a 10-ampere current.

MULTIPLE SERIES INSTALLATION. — The parallel system of distribution, shown in its simplest form in Fig. 98, is variously modified for different purposes. While it is generally preferable to place each lamp on its own separate branch between the mains, so that it can be lighted or extinguished without interfering with the other lamps, it is sometimes desirable to combine the series with the parallel system, producing what is termed the multiple series method; that is, several series in parallel with each other. This method is illustrated in Fig. 99, which shows three series in parallel. Such a method is sometimes convenient for lighting a large room, as a public hall, store, or church, where a large number of lamps are required at the same time. By the method shown in Fig. 99, several such rooms in a large building or in different buildings can be lighted by the same dynamo.

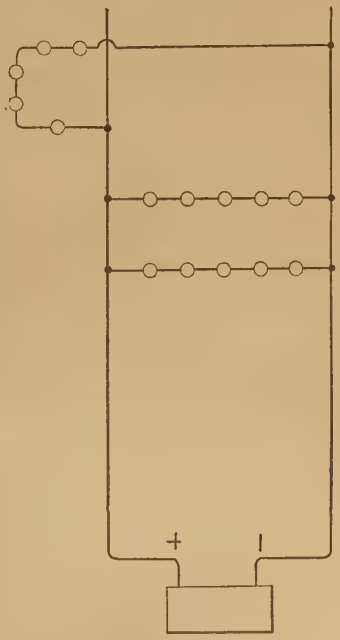

Fig. 99.

Large dynamos can be advantageously employed for such installations; for the E. M. F. of the dynamo must correspond to the requirements of the lamps, and as the entire E. M. F. or electric pressure goes to every branch of the circuit, it is divided among

the several lamps on each branch in proportion to the number in each series, and the required voltage of each lamp. If the dynamo in Fig. 99 were a 500-volt machine, and 100-volt lamps were used, five lamps would be required in each series as shown, or ten 50-volt lamps; or series of five 100-volt lamps, and ten 50-volt lamps could be placed in the same installation.

To prevent the extinguishing of all the lamps in a series, which must result from the extinguishing of any single one, an automatic cut-out is required for each lamp, as in arc lighting; and, to maintain constancy of resistance, an artificial resistance, equivalent to that of the extinguished lamp, must be switched in as the lamp is cut out, or else another lamp of equal resistance automatically lighted.

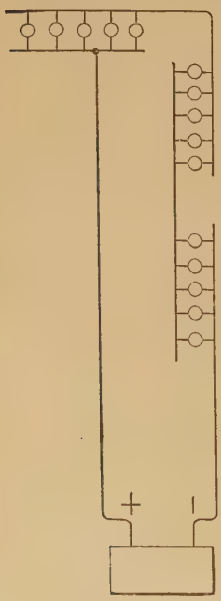

Fig. 100.

Series Multiple Installation. — Instead of serial groups placed in parallel, as just shown, parallel groups may be placed in series, as shown in Fig. 100, constituting what is known as the series multiple method. While in the multiple series method the entire E. M. F. goes to each group, and is divided among its lamps, as has been shown, the entire current in the series multiple method goes to each group, and is divided among its lamps, in proportion to their number. A $2\frac{1}{2}$-ampere current in the mains would therefore furnish a current

of ½ an ampere to each of the five lamps in each group in Fig. 100.

Such an installation is practically on the same basis as an arc-light series, the groups of incandescent lamps taking the place of the single arc lamps, and the E. M. F. of the dynamo, and general resistance of the circuit varying according to the number and resistance of the groups, so as to keep the current constant, while specific regulation is required in each group, the E. M. F., resistance and current being here dependent on the parallel arrangement, and required to be the same for each lamp; and since the extinguishing of one or more lamps in a group would disturb this equilibrium, abnormally increasing the E. M. F. of the remaining lamps, a regulator is provided, as in the Brush system, by which extra lamps are automatically lighted to take the place of those extinguished, or the whole group cut out, as on an arc-light series, in case the whole, or a large proportion, of the lamps are extinguished, so that the current flowing to the other groups in the series shall not be interrupted or diminished.

Combined Arc and Incandescent Installation. — Arc lamps are sometimes placed in series with the groups of incandescent lamps, in which case the current strength of each group and that of each arc lamp must be the same. If arc lamps requiring a ten-ampere current are used, each incandescent group must absorb this current; hence, it may consist of ten one-ampere lamps, twenty half-ampere lamps, or any other number which multiplied by the current per lamp gives ten amperes.

Distributers are, however, sometimes employed in which so much of the current as may be required for a

group is shunted through it, and a resistance coil provided for each lamp, so that when a lamp is extinguished a coil of equal resistance is automatically substituted for it, and constancy of resistance maintained.

It is, however, extremely difficult, in such an installation, to maintain proper equilibrium between the arc and incandescent lamps, so as to produce satisfactory results.

Instead of groups of incandescent lamps in parallel, single incandescent lamps of large candle-power, requiring a current of corresponding strength, may be placed in series with arc lamps requiring a current of the same strength.

THE EDISON THREE-WIRE SYSTEM. — The large amount of copper necessary for the leading mains of an incandescent light installation to carry the current required for any considerable number of lamps distributed over an extended area, and remote from the central station, has proved financially a serious obstacle to progress in this method of electric lighting. Among the methods devised to reduce this amount of copper without impairing the efficiency of the system, the Edison three-wire system stands prominent. In order to understand its advantages, we must compare it with the two-wire system. Fig. 101, letter *A*, represents two dynamos, each having its two leading mains of the usual size, carrying a current to lamps in parallel, and extending in the same general direction, the efficient E. M. F. of each, at the lamps, being estimated at 110 volts, after allowing a fall of ten per cent in the mains and connections. If now these dynamos be joined in series, as represented at *B*, we can suppress two of the mains, and join each two lamps in series also. We would have, then, at *A* a practical E. M. F. of 110 volts to each lamp, and at *B*, of 220 volts to each two lamps in

series, 110 to each lamp as before; the same amount of light is therefore obtained with half the number of mains.

It is found, however, that the amount of copper required for a conductor carrying a current must vary inversely as the square of the E. M. F.; having therefore halved the number of mains, the current carried by the reduced number has double the E. M. F., and

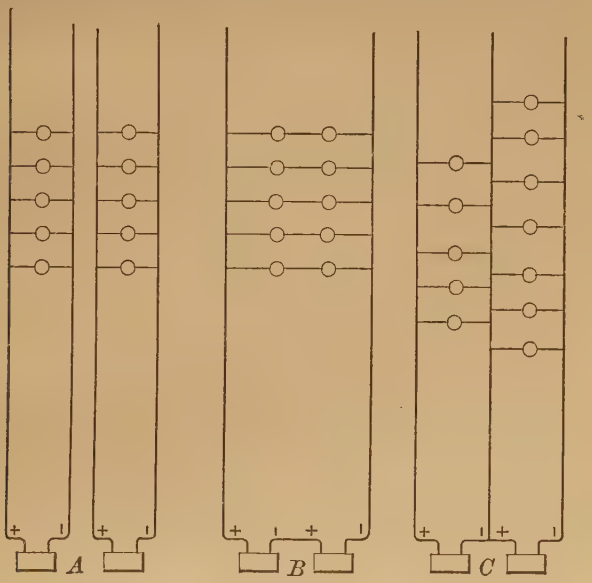

Fig. 101.

the resistance of each two lamps in series being four times that of each two in parallel, only one-fourth the current is required in the mains; the whole amount of copper must therefore be reduced to one-fourth the original amount; which gives each of the two mains half the cross-section of each of the four original mains, the length remaining the same.

But as there are the disadvantages already mentioned in a series connection of incandescent lamps, and as the number of lamps required, or in use simultaneously, is liable to vary on opposite sides of an installation, a third wire is inserted, as shown at *C*. Each lamp has now the same advantages of independent connection with the dynamo, as in the two-wire system, shown at *A*. If an equal number of lamps are burning simultaneously in each row, the current will flow through the parallel branches from one dynamo to the other, as at *B*, the central wire remaining neutral; but if the number is varied by the extinguishing of lamps or otherwise, the third wire furnishes a path for the surplus current required by the row having the greater number lighted, which will flow to that side in consequence of the reduced resistance resulting from the greater number of branches open through the lighted lamps.

We have now three mains at *C*, each half the size of each of the four mains at *A;* the whole amount of copper required at *C* is therefore only three-eighths of that required at *A* to accomplish the same result. It is found, however, that the third, or neutral wire, as it is termed, can be of reduced diameter, by which in practice a further reduction of about $4\,^1/_2$ per cent in the total amount of copper is effected.

The feeding mains, on which no lamps are placed, extend as directly as possible from the central station to a central point in each lamp district, and are there connected with the lamp mains, whose size for different sections is made proportional to the number of lamps; and these are tapped, as in other systems, at the various points where lamps are required, and connected with

mains which extend into the buildings; all the mains being constructed on the three-wire system.

For underground conduits, iron pipes are used in this system, prepared in sections of convenient length, inclosing the three wires imbedded in a compact insulating compound of asphalt and petroleum, pumped in while hot; the wires being separated from the pipe and from each other by rope wound with space between the turns for the passage of the liquid, which solidifies at 330° F.; solid copper rods being preferred to cables.

THE STORAGE BATTERY SYSTEM. — The storage battery has recently become an important auxiliary in electric lighting in connection with the incandescent direct current system.

Every installation must be equipped for its maximum requirement of light, which varies greatly at different hours and at different seasons; the supply required from 6 to 11 P.M. being far in excess of that required during any other part of the twenty-four hours, and that required for the long nights of the cold season exceeding that for the short nights of the warm season.

To meet this maximum demand with a full supply of generators and power, requires a large investment of capital, especially for large central stations in cities, a considerable part of which is unemployed three-fourths of the time, entailing heavy expense for interest which must be added to the cost of the light furnished. This investment of unemployed capital can be reduced to the minimum by the use of storage batteries, as the supply of generators and power can then be made proportional to the average daily amount of light required during the cold season instead of the maximum amount, and the generators run to their full capacity both day

and night; the surplus electricity, generated during the daily minimum requirement of light, being stored in the batteries to meet the daily maximum requirement.

The electricity furnished by the battery has a very important advantage for lighting over that furnished direct from the dynamo, the supply being absolutely steady, while that from the dynamo is subject to the fluctuations incident to the slipping of the belt, irregularity in the running of the engine, and sparking at the brushes, causing a certain amount of flicker in the light, which, even with the best regulation, can not be entirely eliminated.

For lighting railroad cars the storage battery has proved very successful; a charged battery placed on the train furnishes the light required for a run of a thousand miles, while batteries at the terminal or way stations are meantime being charged, to be exchanged, on the arrival of the train, for those discharged, which in their turn are recharged for the next train.

It is also successfully employed for such special lighting as is often required at theaters, art exhibitions, or private entertainments; and, to a limited extent, for lighting private residences, though too costly to come into general use for this purpose.

The Induced Alternating Current System. — Since the amount of copper required to carry an electric current varies inversely as the square of the E. M. F., if a 1,000 or a 1,200 volt dynamo could be substituted for one of 100 or 110 volts, the E. M. F. being multiplied by ten, the amount of copper required for the mains would be inversely, as the square of ten, equal to one hundred; mains, therefore, of one

hundredth part the weight, could be employed. In the direct current system, however, with single lamps arranged in parallel, this would be impractical, 100 to 110 volt dynamos being the usual size practically admissible. But in the alternating current, induction system, dynamos of even greater E. M. F. can be successfully employed, though 1,000 volts represents the usual standard size. With such dynamos, and lamps at an average distance of a mile from the station, No. 1 B. & S. wire — about $^3/_{10}$ inch diameter — is employed for the feeding mains. This is regarded as a practical, economical basis on which to maintain equilibrium between cost of power at the station and of copper in the mains; if, however, it is found desirable to bring the current a distance of several miles, from some point where power is cheap and abundant, as in the case of water-power, so that economy of copper is more of an object than economy of power, dynamos of greater E. M. F. can be employed, and mains of reduced size; No. 5 B. & S. wire — $^3/_{16}$ inch diameter — being often employed for such installations.

This system, therefore, gives, for city lighting, the advantage of a cheap location in the suburbs for the dynamo and power station, from which distribution can be economically made to where property is more expensive; or for conveying the current cheaply from some point where water power is available; also for cheap distribution in sparsely settled districts. The converters, described in Chapter III., pages 55–60, are placed at the various points where lamps are required, and the small, primary, high potential current is, by this means, converted into a large, induced, low potential current proportioned to the number of lamps required at each

point; the alternating current rendering such transformation possible, which would not be possible with the direct current.

The English electricians, Gaulard and Gibbs, first brought this system to public notice in 1883. They adopted the series method of distribution shown in Fig. 102, the converters being placed in series on the primary, high potential mains, and the lamps grouped in parallel on the secondary, induced current mains con-

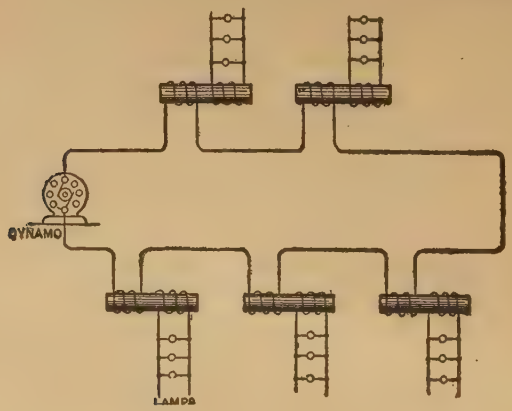

Fig. 102.

nected with each converter, as shown, but insulated from the primary mains. While constancy of current at the several groups could easily be maintained in this system by dynamo regulation, as on arc-light circuits, it was found exceedingly difficult to maintain the specific regulation required for constancy of potential at the lamps, as already explained in similar serial grouping in the direct current system; the difficulty here being increased and complicated by the converters. Hence, this method, after many efforts to improve it,

was abandoned, and the parallel method, both for the primary and secondary mains, adopted.

In this method, illustrated by Fig. 103, each converter being connected with the primary circuit in parallel, each group of lamps connected with it on the secondary circuit has the same independence of the other groups, as each single lamp in the multiple arc installation shown in Fig. 98; each lamp in like manner being connected in parallel with each secondary circuit as shown.

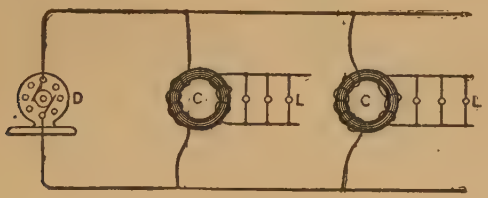

Fig. 103.

Fig. 104 shows an air line installation with its connections in full. The primary mains L^1, L^2, extending from the station, are supported on insulators on the upper cross-arms of the poles P^1, P^2, P^3, while the secondary mains are similarly supported on the lower cross-arms; the converters C^1, C^2, C^3, being placed between the cross-arms, and their primary coils connected above to the primary mains, while their secondary coils are connected below to the secondary mains by short wires as indicated. Branch circuits, l^1, l^2, extend from the secondary mains into the buildings to supply the lamps d^1, d^2. The converters, as mentioned, vary in size, and are estimated by the number of lamps for which each is constructed to supply current; 10 to 80 lamps being the extremes, while the three ordinary sizes most in

demand are respectively for 20, 30, and 40, 50-volt, 16 candle-power lamps.

The very best construction and best insulation are exceedingly important in converters, the success of the system depending largely on their quality; since in dealing with currents of such high E. M. F. the failure of insulation may result in the burning out of the converter and its immediate connections.

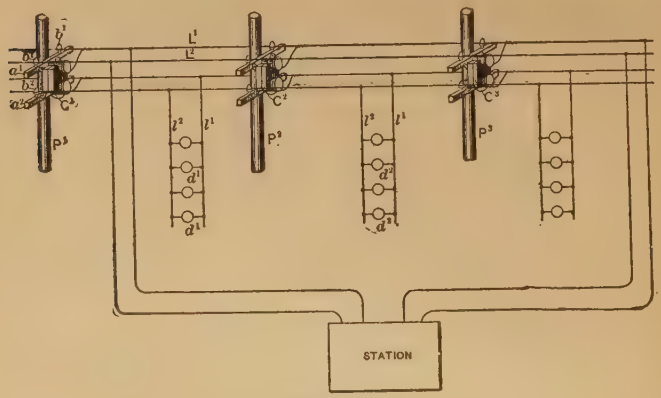

Fig. 104.

In estimating the comparative economy of the alternating and direct current systems, the cost of converters must be added to the alternating current estimate; while on the other hand, the amount of copper required in the alternating current mains being much less than in the direct current mains, and the construction of the dynamo and auxiliary apparatus required at the station being simpler and less expensive, the reduction of expense in these items must be placed as an offset to the expense of converters.

The parallel system of distribution, which has proved

to be the practical solution of the problem of distribution by the induced alternating current, was originally suggested by Rankin Kennedy of Glasgow, and, it is claimed, was put in practical operation for the first time by William Stanley at Great Barrington, Mass., in 1885.

The success of this experiment led to the development of the system on a large scale in 1887 by the Westinghouse Electric Company of Pittsburg, Penn., with which Mr. Stanley has been prominently connected, and to whose skill in the construction and perfection of apparatus the success achieved is largely due.

M. M. M. Slattery of Fort Wayne, Ind., who also claims priority for the first practical experiment, should be recognized as one of the successful pioneers of this system; the promotion of the Slattery induction system, which is substantially the same as that here described, being immediately subsequent to that of the Westinghouse system. In England, Kapp and Mackenzie have been its most active promoters.

THE PRIMARY ALTERNATING CURRENT SYSTEM. — Incandescent lighting by the primary alternating current has already been referred to in connection with the Gordon dynamo in Chapter III., pages 46–49; 5,000 twenty candle-power lamps, in multiple series, being illuminated by currents from a single dynamo, taken directly from the coils of its stationary armature; the Swan, 30-ohm lamp, being used. The Gordon system, in use for some time in England, has never been introduced into the United States; and Gordon himself has recently abandoned it for the direct current system.

Within the last five years Charles Heisler of St.

Louis, Mo., has introduced a system based on the primary alternating current method, with series distribution, low resistance, incandescent lamps of 30 candle-power, and a three to four ampere current carried by a No. 8 copper wire. The obvious electrical difficulties involved in such a system Mr. Heisler claims to have successfully overcome; series distribution under these conditions being rendered practical by his short-circuiting device which cuts out the lamp in case a filament breaks, while the low resistance of the lamp filament adapts it to a current of much greater strength than that of the ordinary incandescent lamp, though less than half that of the ordinary arc lamp current; while the large candle-power specially adapts this lamp to the lighting of streets and large buildings. It is claimed that perfect automatic regulation of E. M. F., current and resistance has been attained for every variation of load, from the full capacity of the circuit to that of a single lamp; dispensing not only with the converters required in the induction system, but also with the distributers, resistance boxes, and various safety devices required in other systems. Its principal feature, however, is the great economy of copper by the use of mains adapted to a 4-ampere current as compared with those required for a 200-ampere current.

The Bernstein lamp is preferred both in this and in the induction system on account of its large filament of low resistance.

Meters. — In all the various systems of incandescent lighting by parallel distribution, meters, such as have been described in Chapter VI., pages 150–155, for determining the amount of current consumed, are connected with the mains at the various points where lamps are

required, each company adopting some special style, and charging its customers in accordance with this measurement.

Fuses. — As electric light wires are liable from accidental causes to become overheated and ignite inflammable matter in close proximity, short fuses of soft metal are placed both in the mains and branch circuits, and wherever groups of lamps, as for chandeliers, or electrolliers, are required. If from any abnormal increase of current the temperature of the conductors approaches an unsafe degree, the fuse melts and opens the circuit; the fuses in the main and branch circuits being adjusted to the requirements of each circuit by difference of size, which produces the difference of resistance necessary for the melting temperature; a small fuse being more easily melted by a current of given strength than a large one. These fuses are attached by binding screws, and are easily replaced by new ones when melted.

Switch-Boards. — Every station, whether for arc or incandescent lighting, is provided with a switch-board, embracing the terminals of the various circuits properly designated, so that connection between the dynamos and the circuits in a large building, or lamp district, can be instantly opened or closed, and the supply of current thus diminished or increased, according to the number of lamps required at different hours.

Several circuits may extend from the same dynamo, from different dynamos, or from connected dynamos, to the various rooms or floors of a large building, or the various sections of an extended area in a city; all under control of the operator at the station; so that any particular room, floor, or section, can be either connected or cut off by moving a switch.

LIGHTING MINES. — The incandescent system has a very important application in the lighting of mines; the station being located at the mouth of the shaft, and current distributed through the various subterranean passages. This system is especially adapted to coal mines as a protection against the fatal accidents so often resulting from the ignition of inflammable gases; the inclosure of the glowing filament in an air-tight glass bulb affording almost absolute security, since even the accidental breaking of the bulb would shatter and extinguish the filament before the gas could enter. The vitiating of the air by the consumption of oxygen, and the odor of burning oil from numerous lamps, is another evil which is eliminated. These advantages, and the superior illumination afforded, have made the incandescent lamp exceedingly popular with miners, wherever it has been introduced. Portable lamps with battery attachment are also in use among miners.

INSTALLATION RULES. — The following is a brief summary of the rules usually given for the regulation of an electric light installation. 1. The dynamo should have a dry location; should not be exposed to dust or flyings; should be kept clean and well oiled, and its internal insulation should be practically perfect. 2. All conductors in the dynamo room should be properly supported, insulated, numbered, and conveniently arranged for inspection. 3. The construction of switches or commutators for opening or closing circuits, should be such that when moved or left there shall be no liability to heating or the formation of an arc. 4. The gauge of the wire on every part of the circuit should be proportioned to the current, and all junctions between conductors of different size should be fitted with fuses,

so that the temperature of a conductor at any point cannot exceed 150° F. 5. All joints should be soldered, or electrically welded, and made mechanically and electrically perfect. 6. Complete metallic circuits should be used, and all connection with gas or water pipes as conductors avoided. 7. Bare wires, passing over buildings, should be at least seven feet from every part of the building; and those crossing thoroughfares should be high enough to allow free passage for all vehicles and fire apparatus. 8. Underground wires should be thoroughly insulated, easily accessible, and their position clearly indicated. 9. The insulation of indoor wires should receive special care, so as to protect the building and its occupants against dangerous currents, and to prevent electric waste, particularly where the wires pass through walls or floors, or in close proximity to metallic masses; and they should be incased in hard insulating material where the ordinary wrapping is liable to abrasion or the depredation of rats and mice; and, when placed beneath floors, they should be protected against mechanical injury and their position clearly indicated. Covered wire should have the preference for indoor work. Frequent electrical testing is exceedingly important, as the only safeguard against waste of current or injury to the conductors or insulation, since the ordinary indications of leakage by smell or otherwise, as in the case of gas or water, are absent. 10. All bare outdoor wire should be thoroughly insulated at its supports, and incased in insulating material for at least two feet on each side. 11. Arc lamps should be provided with globes as a protection against flying sparks from the carbons; and all parts which require handling should be insulated from the circuit.

INDEX.

A

Accumulator, the Julien, 227, 228.
Alternating current dynamos, 40–60.
Alternating current system, the induced, 246–251.
, the primary, 251, 252.
Ammeter, the Weston, 139, 140.
Ammeters, Ayrton & Perry's spring voltmeters and, 144–147.
, gravity, 147–149.
, voltmeters and, 136.
Ampere, the, 130.
Ampere-hour, the, 130.
Arc lamp, the, 158–185.
, principles of the, 158–163.
Arc-light carbons, 163–172.
, automatic adjustment of, 176–178.
Arc-light distribution, 229–235.
Arc and incandescent installation, combined, 241, 242.
Armature, the, 15–17.
Armatures, closed circuit and open circuit, 18.
Armature's mode of action, the, 29–34.
Ayrton and Perry's spring voltmeters and ammeters, 144–147.

B

Ball dynamo, the, 92–94.
Battery, the storage, 209–228.
, the Planté, 215, 216.
system, the storage, 245, 246.
Bernstein carbons, the, 194–196.
lamps, 195.
Brushes, the, 18, 19.
Brush dynamo, the, 75–80.
arc-light lamp, the, 180–185.
Bunsen photometer, the, 157*e*, 157*f*.

C

Candle, electric, the Jablochkoff, 172, 173.
, the Jamin, 173–175.
Carbons, arc-light, 163–172.
, automatic adjustment of, 176–178.
Carbons, incandescent-light, 190–202.
, the Edison, 190, 191.
, the Lane-Fox, 191, 192.
Carbons, the Cruto, 192, 193.
, the Swan, 193, 194.
, the Weston, 194.
, the Bernstein, 194–196.
Cardew voltmeter, the, 149–152.
Chemical reaction in the Planté cell, 211–215.
in the Faure cell, 218.
Closed circuit and open circuit armatures, 18.
Coils, resistance, 157*c*-157*e*.
Coulomb, the, 130, 131.
Coulomb-meter, the Forbes, 154, 155.
Commutation, 25–29.
Commutator, the, 17, 18.
Conductivity and insulation, 125, 126.
Constant current dynamo, 37, 38.
potential dynamo, 38.
Construction, general details of filament, 196–202.
of the incandescent lamp, 203–207.
Converter, the, 55–60, 249, 250.
Cruto carbons, the, 192, 193.
Current, 117–119.
meter, the Edison, 152–154.
system, the direct, 235–246.
Current system, the induced alternating, 246–251.
, the primary alternating, 251, 252.
Currents, reversed, 23–25.

D

Definitions, secondary cell, 228.
Difference of potential, 22, 23.
Direct current system, the, 235–246.
Distribution, electric, 229–255.
, arc-light, 229–235.
, incandescent-light, 235–254.
Durability of storage cells, 228.
Dynamo, the, 14–114.
, constant current, 37, 38.
, constant potential, 38.
, the, principles of, 14–39.
Dynamo's mode of action, the, 21–25.
Dynamo, principles of the alternating current, 40–45.
Dynamos, alternating current, 40–60.
Dynamo, Siemens-Halske, the, 45.
, Lontin, the, 46.
, Gordon, the, 46–49.

Dynamo, Westinghouse, the, 49–54.
Dynamos, direct current, 61–114.
Dynamo, the Edison, 61–64.
, the Weston, 64–71.
, the Sperry, 71–75.
, the Brush, 75–80.
, the Thomson-Houston, 80–90.
, the Western electric, 90–92.
, the Ball, 92–94.
, the Mather, 94–97.
, the Van Depoele, 97–100.
, the Hochhausen, 100–111.
, the Wood, 111–114.

E

Edison dynamo, the, 61–64.
carbons, the, 190, 191.
current meter, the, 152–154.
lamp, the, 197.
three-wire system, the, 242–245.
Electro-motive force, 116.
Electricity a mode of molecular motion, 1–13.
Electric candle, the Jablochkoff, 172, 173.
, the Jamin, 173–175.
Electric distribution, 229–255.
horse-power, the, 132.
induction, 119–123.
measurement, 133–157*f*.
potential, 115, 116.
resistance, measurement of, 157*b*–157*e*.
storage, 209, 210.
terms and units, 115–132.
units, 128, 129.
Excitation, separate, 38.
Experiments in incandescent lighting, early, 187–190.

F

Farad, the, 131.
Faure's secondary cell, 217.
, chemical reaction in the, 218.
, faults of the, 219.
, the improved, 219–222.
, electric formation of the plates for, 222, 223.
, E. M. F., resistance and current of, 223, 224.
, cause of buckling in, 224, 225.
, variable resistance of electrolyte in, 225, 226.
Field-magnets, the, 19–21.
Filament construction, general details of, 196–202.
Forbes coulomb-meter, the, 154, 155.
Force, electro-motive, 116.
Foucault-Duboscq lamp, the, 178.
Fuses, 253.

G

Gaulard and Gibbs system, the, 248.
Gordon dynamo, the, 40–49.
Gravity ammeters, 147–149,

H

Hefner von Alteneck's regulator, 231–235.
Hochhausen dynamo, the, 100–111.
Horse-power, the electric, 132.

I

Incandescent lamp, the, 186–208.
, construction of the, 202–207.
Incandescent lighting, early experiments in, 187–190.
Incandescent-light carbons, 190–202.
distribution, 235–254.
Indicator, the potential, 134–136.
Induction, electric, 119–123.
, magnetic, 123–125.
, system, the Slattery, 251.
Insulation, conductivity and, 125, 126.
Intensity, quantity and, 126–128.
Installation, series, 230, 231.
, parallel, 237, 238.
, multiple series, 239, 240.
, series multiple, 240, 241.
, combined arc and incandescent, 241, 242.
rules, 254, 255.

J

Jablochkoff electric candle, the, 172, 173.
Jamin electric candle, the, 173–175.
Joule, the, 132.
Julien accumulator, the, 227, 228.

L

Lamp, the arc, 158–185.
, principles of the arc, 158–163.
, the sun, 175, 176.
, the Foucault-Duboscq, 178.
, the Serrin-Lontin, 178–180.
, the Brush, 180–185.
Lamp, the incandescent, 186–208.
, construction of, 202–207.
, Reynier's, 186, 187.
, Starr's, 188.
, the Bernstein, 195.
, the Edison, 197.
, the Weston, 198, 202–207.
, the Swan, 204–206.
, position of, 207.
, renewal of, 207, 208.
Lane-Fox carbons, the, 191, 192.
Light unit, the standard, 157*e*.
Lighting mines, 254.
Lontin dynamo, the, 46.

M

Magnets, the field, 19–21.
Magnetic induction, 123–125.
Mather dynamo, the, 94–97.
Measurement, electric, 133–157*f*.
of electric resistance, 157*b*, 157*c*.
Meters, 252, 253.
Microfarad, the, 131.

Milliammeter, the Weston, 140.
Mines, lighting, 254.
Mode of action, the armature's, 29–34.
, the dynamo's, 21–25.
Multiple series installation, 232–240.

O

Ohm, the, 129, 130.

P

Parallel installation, 237, 238.
Planté's secondary cell, 210, 211.
Planté cell, chemical reaction in the, 211–215.
Photometer, the Bunsen, 157*e*, 157*f*.
Position of lamp, 207.
Potential, difference of, 22, 23.
, electric, 115, 116.
indicator, the, 134–136.
Principles of the alternating current dynamo, 40–45.
Pumpelly cell, the, 226, 227.

Q

Quantity and intensity, 126–128.

R

Renewal of lamps, 207, 208.
Resistance, 116, 117.
coils, 157*c*–157*e*.
Regulator, Hefner von Alteneck's, 231–235.
Reversed currents, 23–25.
Reynier's lamp, 186, 187.
Rules, installation, 254, 255.

S

Secondary cell, definitions, 228.
, Faure's, 217.
, Faure, chemical reaction in the, 218.
, Faure, faults of the, 219.
, Faure, the improved, 219–223.
, Faure's electric formation of the plates for, 222.
, Faure's, E. M. F., resistance and current of, 223, 224.
, Faure's, cause of buckling in, 224, 225.
, Faure's, variable resistance of electrolyte in, 225, 226.
, Planté's, 201–211.
, the Pumpelly, 226, 227.
Separate excitation, 38.
Series installation, 230, 231.
multiple installation, 240, 241.
Series, shunt, and compound winding, 34–37.
Serrin-Lontin lamp, the, 178–180.
Siemens Halske dynamo, the, 45.
Slattery induction system, the, 251.
Starr's Lamp, 188.
Storage battery, the, 209–228.
system, the, 245, 246.
Storage cells, durability of, 228.
Storage, electric, 209, 210.
Sperry dynamo, the, 71–75.
Spring voltmeters and ammeters, Ayrton & Perry's, 144–147.
Sun lamp, the, 175–178.
Swan carbons, the, 193, 194.
Switch-boards, 253.
System, the Gaulard and Gibbs, 248.

T

Terms and units, electric, 115–132.
Thomson-Houston dynamo, the, 80–90.
Thomson recording watt-meter, the, 155–157*b*.
Three-wire system, the Edison, 242–245.
Transformer, the. (See Converter, 55–60.)

U

Units, electric, 128, 129.

V

Van Depoele dynamo, the, 97–100.
Volt, the, 129.
Voltmeter, the Cardew, 149–152.
, the Weston, 136–139.
, the Wirt, 140–144.
Voltmeters and ammeters, 136.
, Ayrton & Perry's spring, 144–147.

W

Watt, the, 131, 132.
Watt-meter, the Thomson recording, 155–157*b*.
Western electric dynamo, 90–92.
Westinghouse dynamo, the, 49–54.
Weston ammeter, the, 139, 140.
carbons, the, 194.
dynamo, the, 64–71.
milliammeter, the, 140.
voltmeter, the, 136–139.
Winding, series, shunt, and compound, 34–37.
Wirt voltmeter, the, 140–144.
Wood dynamo, the, 111–114.

LIST OF WORKS

ON

ELECTRICAL SCIENCE

PUBLISHED AND FOR SALE BY

D. VAN NOSTRAND COMPANY,

23 Murray & 27 Warren Street,

NEW YORK.

ATKINSON, PHILIP. Elements of Static Electricity, with full description of the Holtz and Topler Machines, and their mode of operating. Illustrated. 12mo, cloth..... $1.50

—— The Elements of Dynamic Electricity and Magnetism. 12mo, cloth. $2.00

—— Elements of Electric Lighting, including Electric Generation, Measurement, Storage, and Distribution. Seventh edition, fully revised and new matter added. Illustrated. 8vo, cloth $1.50

—— The Electric Transformation of Power and its Application by the Electric Motor, including Electric Railway Construction. Illustrated. 12mo, cloth..... .....$2.00

BADT, F. B. Dynamo Tender's Hand-book. 70 Illustrations. 16mo, cloth..... .....$1.00

—— Electric Transmission Hand-book. Illustrations and Tables. 16mo, cloth..... .....$1.00

—— Incandescent Wiring Hand-book. Illustrations and Tables. 12mo, cloth $1.00

—— Bell Hanger's Hand-book. Illustrated. 12mo, cloth.....$1.00

BIGGS, C. H. W. First Principles of Electrical Engineering. Being an attempt to provide an Elementary Book for those who are intending to enter the profession of Electrical Engineering. Illustrated. 12mo, cloth. $1.00

BLAKESLEY, T. H. Papers on Alternating Currents of Electricity, for the Use of Students and Engineers. Second edition, enlarged. 12mo, cloth. $1.50

BOTTONE, S. R. Electrical Instrument-making for Amateurs. A Practical Hand-book. Sixth edition. Enlarged by a chapter on "The Telephone." With 48 Illustrations. 12mo, cloth.....$1.20

——— Electric Bells, and all about them. A Practical Book for Practical Men. With over 100 Illustrations. 12mo, cloth.....$0.50

——— The Dynamo: How Made and How Used. A Book for Amateurs. Sixth edition. 100 Illustrations. 12mo, cloth.....$1.00

——— Electro-motors: How Made and How Used. A Hand-book for Amateurs and Practical Men. Illustrated. 12mo, cloth.....$0.50

BUBIER, E. T. 2nd. Questions and Answers about Electricity. A First Book for Beginners. 12mo, cloth.....$0.50

CROCKER, F. B., and **S. S. WHEELER.** The Practical Management of Dynamos and Motors. Illustrated. 12mo, cloth.....$1.00

CROCKER, F. B. Electric Lighting. (In press.)

CUMMING, LINNÆUS, M.A. Electricity treated experimentally. For the Use of Schools and Students. New edition. 12mo, cloth.....$1.50

DESMOND, CHAS. Electricity for Engineers. Part I.: Constant Current. Part II.: Alternate Current. Revised edition. Illustrated. 12mo, cloth.....$2.50

DU MONCEL, Count TH. Electro-magnets: The Determination of the Elements of their Construction. 16mo, cloth. (No. 64 Van Nostrand's Science Series.).....$0.50

DYNAMIC ELECTRICITY. Its Modern Use and Measurement, chiefly in its application to Electric Lighting and Telegraphy, including: 1. Some Points in Electric Lighting, by Dr. John Hopkinson. 2. On the Treatment of Electricity for Commercial Purposes, by J. N. Schoolbred. 3. Electric Light Arithmetic, by R. E. Day, M.E. 18mo, boards. (No. 71 Van Nostrand's Science Series.).....$0.50

EWING, J. A. Magnetic Induction in Iron and other Metals. Second issue. Illustrated. 8vo, cloth.....$4.00

FISKE, Lieut. BRADLEY A., U. S. N. Electricity in Theory and Practice; or, The Elements of Electrical Engineering. Eighth edition. 8vo, cloth.....$2.50

FLEMING, Prof. A. J. The Alternate-Current Transformer in Theory and Practice. Vol. I.: The Induction of Electric Currents. 500 pp. Second edition. Illustrated. 8vo, cloth.....$3.00

——— Vol. II.: The Utilization of Induced Currents. 594 pp. Illustrated. 8vo, cloth.....$5.00

GORDON, J. E. H. School Electricity. 12mo, cloth.....$2.00

GORE, Dr. GEORGE. The Art of Electrolytic Separation of Metals (Theoretical and Practical). Illustrated. 8vo, cloth.....$3.50

GUILLEMIN, AMÉDEE. Electricity and Magnetism. Translated, revised, and edited by Professor Silvanus P. Thompson. 600 Illustrations and several Plates. Large 8vo, cloth.....$8.00

HASKINS, C. H. The Galvanometer and its Uses. A Manual for Electricians and Students. Fourth edition, revised. 12mo, morocco.....$1.50

—— Transformers : Their Theory, Construction, and Application Simplified. Illustrated. 12mo, cloth.....$1.25

HAWKINS, C. C., M.A., A.I.E.E., and **WALLIS, F., A.I.E.E.** The Dynamo, its Theory, Design, and Manufacture. 190 Illustrations. 8vo, cloth $3.00

HOBBS, W. R. P. The Arithmetic of Electrical Measurements. With numerous examples, fully worked. New edition. 12mo, cloth.....$0.50

HOSPITALIER, E. Polyphased Alternating Currents. Illustrated. 8vo, cloth $1.40

INDUCTION COILS: How Made and How Used. Fifth edition. 16mo, cloth. (No. 53 Van Nostrand's Science Series.).....$0.50

INCANDESCENT ELECTRIC LIGHTING : A Practical Description of the Edison System, by H. Latimer. To which is added, The Design and Operation of Incandescent Stations, by C. J. Field ; a Description of the Edison Electrolyte Meter, by A. E. Kennelly ; and a Paper on the Maximum Efficiency of Incandescent Lamps, by T. W. Howells. Illustrated. 16mo, cloth. (No. 57 Van Nostrand's Series.).....$0.50

KAPP, GISBERT, C.E. Electric Transmission of Energy and its Transformation, Subdivision, and Distribution. A Practical Hand-book. Fourth edition, revised. 12mo, cloth.....$3.50

—— Alternate-Current Machinery. 190 pages. Illustrated. (No. 96 Van Nostrand's Science Series.).....$0.50

—— Dynamos, Alternators, and Transformers. Illustrated. 8vo, cloth..$4.00

KEMPE, H. R. The Electrical Engineer's Pocket-book ; Modern Rules, Formulæ, Tables, and Data. 32mo, leather.....$1.75

KENNELLY, A. E. Theoretical Elements of Electro-dynamic Machinery. Vol. I. Illustrated. 8vo, cloth.....$1.50

KILGOUR, M. H., and **SWAN, H.,** and **BIGGS, C. H. W.** Electrical Distribution : Its Theory and Practice. Illustrated. 8vo, cloth....$4.00

LOCKWOOD, T. D. Electricity, Magnetism, and Electro-telegraphy. A Practical Guide and Hand-book of General Information for Electrical Students, Operators, and Inspectors. Revised edition. 8vo, cloth. Profusely Illustrated.....$2.50

LORING, A. E. A Hand-book of the Electro-magnetic Telegraph. 16mo, cloth. (No. 39 Van Nostrand's Science Series.).....$0.50

MARTIN, T. C., and **WETZLER, J.** The Electro-motor and its Applications. Third edition. With an Appendix on the Development of the Electric Motor since 1888, by Dr. L. Bell. 300 Illustrations. 4to, cloth. $3.00

MORROW, J. T., and **REID, T.** Arithmetic of Magnetism and Electricity. 12mo, cloth.....$1.00

MUNRO, JOHN, C.E., and **JAMIESON, ANDREW, C.E.** A Pocket-book of Electrical Rules and Tables, for the use of Electricians and Engineers. Ninth edition, revised and enlarged. With numerous diagrams. Pocket size, leather.....$2.50

NIPHER, FRANCIS E., A.M. Theory of Magnetic Measurements, with an Appendix on the Method of Least Squares. 12mo, cloth.....$1.00

NOAD, H. M. The Student's Text-book of Electricity. A new edition, carefully revised by W. H. Preece. 12mo, cloth. Illustrated.....$4.00

OHM, Dr. G. S. The Galvanic Circuit Investigated Mathematically. Berlin, 1827. Translated by William Francis. With Preface and Notes by the Editor, Thos. D. Lockwood. 12mo, cloth. (No. 102 Van Nostrand's Science Series.).....$0.50

PLANTÉ, GASTON. The Storage of Electrical Energy, and Researches in the Effects created by Currents combining Quantity with High Tension. Translated from the French by Paul B. Elwell. 89 Illustrations. 8vo..$4.00

POPE, F. L. Modern Practice of the Electric Telegraph. A Hand-book for Electricians and Operators. An entirely new work, revised and enlarged, and brought up to date throughout. Illustrations. 8vo, cloth.....$1.50

POOLE, J. The Practical Telephone Hand-book. Illustrated. 8vo, cloth. $1.00

PREECE, W. H., and **STUBBS, A. J.** Manual of Telephony. Illustrated. 12mo, cloth.....$4.50

RECKENZAUN, A. Electric Traction. Illustrated. 8vo, cloth.....$4.00

RUSSELL, STUART A. Electric-light Cables and the Distribution of Electricity. 107 Illustrations. 8vo, cloth.....$2.25

SABINE, ROBERT. The History and Progress of the Electric Telegraph, with Description of some of the Apparatus. 12mo, cloth. Illustrated..$1.25

SALOMONS, Sir DAVID, M.A. Electric-light Installations. Vol. I. Management of Accumulators. A Practical Hand-book. Seventh edition, revised and enlarged. 12mo, cloth. Illustrated.....$1.50
—— Vol. II.: Apparatus.....$2.25
—— Vol. III.: Application.....$1.50

SCHELLEN, Dr. H. Magneto-electric and Dynamo-electric Machines: Their Construction and Practical Application to Electric Lighting and the Transmission of Power. Translated from the third German edition by N. S Keith and Percy Neymann, Ph.D. With very large Additions and Notes relating to American Machines, by N. S. Keith. Vol. I., with 353 Illustrations. Second edition.....$5.00

SLOANE, Prof. T. O'CONOR. Standard Electrical Dictionary. 300 Illustrations. 8vo, cloth.....$3.00

THOM, C., and **JONES, W. H.** Telegraphic Connections, embracing recent methods in Quadruplex Telegraphy. 8vo, cloth. Twenty colored plates.....$1.50

THOMPSON, EDWARD P. How to Make Inventions; or, Inventing as a Science and an Art. An Inventor's Guide. Illustrated. 8vo, paper..$1.00

THOMPSON, Prof. S. P. Dynamo-electric Machinery. With an Introduction and Notes by Frank L. Pope and H. R. Butler. Fully Illustrated. (No. 66 Van Nostrand's Science Series.).....$0.50

—— Recent Progress in Dynamo-electric Machines. Being a Supplement to "Dynamo-electric Machinery." Illustrated. 12mo, cloth. (No. 75 Van Nostrand's Science Series.).....$0.50

—— The Electro-magnet and Electro-magnetic Mechanism. 213 Illustrations. 8vo, cloth. $6.00

TREVERT, E. Practical Directions for Armature and Field-magnet Winding. 12mo, cloth. Illustrated.....$1.50

TUMLIRZ, Dr. Potential, and its application to the explanation of Electrical Phenomena. Translated by D. Robertson, M.D. 12mo, cloth....$1.25

TUNZELMANN, G. W. de. Electricity in Modern Life. Illustrated. 12mo, cloth.....$1.25

URQUHART, J. W. Dynamo Construction. A Practical Hand-book for the Use of Engineer Constructors and Electricians in Charge. Illustrated. 12mo, cloth.....$3.00

WALKER, FREDERICK. Practical Dynamo-building for Amateurs. How to Wind for any Output. Illustrated. 16mo, cloth. (No. 98 Van Nostrand's Science Series.).....$0.50

WALKER, SYDNEY F. Electricity in our Homes and Workshops. A Practical Treatise on Auxiliary Electrical Apparatus. Illustrated. 12mo, cloth.....$1.50

WEBB, H. L. A Practical Guide to the Testing of Insulated Wires and Cables. Illustrated. 12mo, cloth.....$1.00

WEYMOUTH, F. MARTEN. Drum Armatures and Commutators. (Theory and Practice.) A complete treatise on the theory and construction of drum-winding, and of commutators for closed-coil armatures, together with a full résumé of some of the principal points involved in their design; and an exposition of armature reactions and sparking. 8vo, cloth. Illustrated.....$3.00

WORMELL, R. Electricity in the Service of Man. A Popular and Practical Treatise on the Application of Electricity in Modern Life. From the German, and edited, with copious additions, by R. Wormell, and an Introduction by Professor J. Perry. With nearly 850 Illustrations. Royal 8vo, cloth.....$6.00

***** A General Catalogue—64 pages—of Works in all branches of Electrical Science furnished gratis on application.**

DATE DUE

JAN 14 '85
APR 09 '85
FEB 18 1990
MAR 05 1990
APR 12 1990 MAR 31 1990

WITHDRAWN FROM
OHIO NORTHERN
UNIVERSITY LIBRARY

GAYLORD PRINTED IN U.S.A.

HETERICK MEMORIAL LIBRARY
621.32 A87 onuu
Atkinson, Philip/The elements of electri
3 5111 00118 8915

OCLC

Heterick Memorial Librar
Ohio Northern University
Ada, Ohio 45810